



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

Doors are designed for use with acoustical tile or gypsum board walls and ceilings. The door is engineered to install flush, virtually concealed. Door is recessed 5/8" to accept acoustical tile or gypsum board.

Door is 16 gauge and frame is 16 gauge, galvanized steel with a white prime coat finish.

Concealed Hinge operates completely out of sight so that only the metal thickness of the door and frame is visible.

Latch is screwdriver operated.

GUIDE SPECIFICATION

Access door shall be fabricated from 16 gauge and frame from 16 gauge, galvanized steel with a white prime coat finish. Door shall be recessed 5/8" to accept acoustical tile or gypsum board.

Hinge shall be concealed type. Latch shall be screwdriver operated.

MODEL NUMBER AND OPTIONS SELECTION

BASE MODEL NUMBER

-AT Acoustical Tile Access Door

SUFFIX OPTIONS

- AKL Allen Key Latch
- GB Galvanized Drywall Bead
- CL Cylinder Lock (one per door)
- CLD Cylinder Lock with Dust Shutter (one per door)
- SS Stainless Steel Construction (Type 304 No. 4 Satin Finish)

For a complete list of options visit www.BestAccessDoors.com

SKU: BA-AT



ACCOUSTICAL TILE ACCESS DOORS



■ DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

DOOR SIZE (W X H)	CEILING OPENING (Minimum Required)	LATCHES	WEIGHT
AT 8" x 8"	8-1/8" x 8-1/8"	1	4 lbs.
AT 12" x 12"	12-1/8" x 12-1/8"	1	5.5 lbs.
AT 12" x 24"	12-1/8" x 24-1/8"	2	9.5 lbs.
AT 16" x 16"	16-1/8" x 16-1/8"	2	8.5 lbs.
AT 18" x 18"	18-1/8" x 18-1/8"	2	10 lbs.
AT 24" x 24"	24-1/8" x 24-1/8"	4	16 lbs.
AT 24" x 36"	24-1/8" x 36-1/8"	5	24.5 lbs.

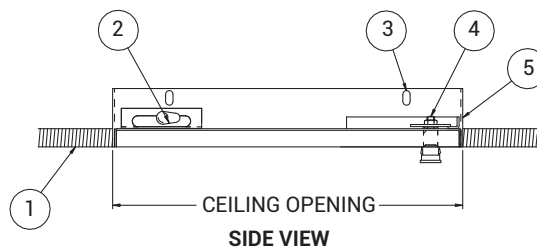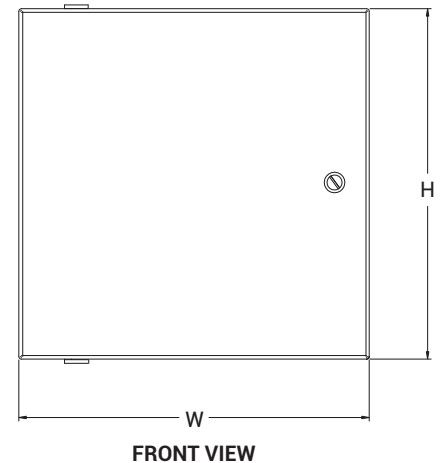

NOTES:

1. TILE, BY OTHERS
2. CONCEALED HINGE
3. MOUNTING HOLES
4. SCREWDRIVER OPERATED LATCH
5. FRAME

■ PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823

FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com

E-MAIL:
info@bestaccessdoors.com