
COM

Best Access Doors SUBMITTAL / TECHNICAL DATA SHEET


GFRG/GFRC ACCESS PANEL FOR CEILINGS

POP-OUT ROUND

INSTALLATION SPECIFICATION

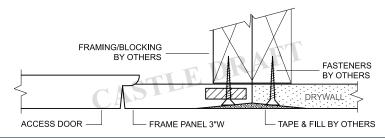

| DIMENSION AND APPEARANCE | | | | | | | |
|--------------------------|-----------|-----------------------------|--------------------|--|--|--|--|
| | STOCK# | ACCESS DOOR OPENING SIZE | ROUGH OPENING SIZE | | | | |
| | RD-580009 | Ø 9" | 15" x 15" | | | | |
| | RD-580012 | Ø 12" | 18" x 18" | | | | |
| | RD-580016 | Ø 16" | 22" x 22" | | | | |
| | RD-580018 | Ø 18" | 24" x 24" | | | | |
| | RD-580024 | Ø 24" | 30" x 30" | | | | |
| | RD-580030 | Ø 30'' | 36" x 36" | | | | |



| Shell Thickness | 1/8" to 3/16" |
|-------------------------------------|---------------------|
| Fastener Test Pull Out (wood stud) | 525 l b avg. |
| Fastener Test Pull Out (metal stud) | 215 lb avg. |
| Fastener Push Through Test | 350 l b avg. |
| Fuel Contribution (ASTM E84-80) | 0 |
| Flame Spread (ASTM E84-80) | 0 |
| Smoke Index (ASTM E84-80) | 0 |
| Combustion (ASTM E84-80) | Non-combustible |
| Class A non-rated | - |
| CSI Code | CSI#08310 |

TECHNICAL DATA

PRODUCT FEATURES

CREATING SEAMLESS SOLUTIONS

Seamless TM Access Panels by BestAccessDoors are manufactures direct, manufactured from GFRG/GFRC & 70% post-consumer recycled glass, for a unique GREEN design-matrix designed to blend seamlessly into your walls and ceilings. They consist of a surround frame and either a drop-in door or hinged door. Available in Sixty standard residential or commercial sizes, BestAccessDors are perfect for jobs where access is required at regular intervals. Lightweight and easily textured, the panels can be used in both new and retrofit construction across unlimited applications. Their smart design to helps contractors work smarter, faster and better, the Seamless TM panels feature a tapered edge for tape joints and won't shrink, crack or sag. Seamless™ Access Panels provide an aesthetically pleasing solution for a more attractive interior.

PRODUCT FEATURES

- Lightweight
- · Single trade installation

- No shrinking, cracking sagging or rusting
- · Blends seamlessly into surrounding drywall
- · Concealed hinge
- · Reduce labor costs
- · Zero mold & fungus growth
- · Moisture resistant

LEED RATING SYSTEM

LEED ready





PROJECT DATA

| PROJECT NAME: | QTY | W | Н | OPTIONS | |
|-----------------------|--|---|---|---------|--|
| ARCHITECT: | | | | | |
| DEALER: | | | | | |
| CONTRACTOR: | | | | | |
| LOCATION: | SPECIAL INSTRUCTIONS: | | | | |
| DATE: | | | | | |
| TAGGING INSTRUCTIONS: | SUBMITTAL APPROVAL: (signature or stamp) | | | | |

Tel.: 1-800-483-0823

fax: 1-888-828-6021

www.bestaccessdoors.com sales@bestaccessdoors.com