



Quality Access Doors- **FAST!**

SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

This flush access door is ideal for use on Acoustical walls and ceilings where maintaining STC Rating (Sound Transmission Class) and OITC Rating (Outdoor Indoor Transmission Class) is required.

FEATURES

- Zinc coated steel provides superior corrosion resistance
- Type 304 Stainless steel with #4 satin polish also available
- Tested and evaluated to ASTM: E90(09), ASTM: E413(16), ASTM: E1332(16) and certified to STC Rating 64 and OITC Rating 54

SPECIFICATIONS

MATERIAL: 18 Gauge Satin Coat Steel

DOOR: 18 Gauge, encapsulated design with 2" thick acoustical mineral liner and 0.11" thick mineral filled vinyl barrier

FRAME: 18 Gauge, press bent for strength and rigidity, with 1" wide trim flanges and 1" thick acoustical mineral liner

GASKET: Silicone perimeter seal gasket

HINGE: Continuous exposed stainless steel piano hinge

STANDARD LOCK: Screw driver operated Compression Latch

ACOUSTIC RATING: This door has been tested and evaluated to ASTM: E90(09), ASTM: E413(16), ASTM: E1332(16) and certified to STC Rating 64 and OITC Rating 54.

FINISH: 5 stage iron phosphate preparation with prime coat of white baked-on enamel

For a complete list of options visit
www.BestAccessDoors.com

SKU: **BA-ACF-2064**

SPECIALTY DOORS

STEEL FLUSH ACOUSTICAL ACCESS DOOR



DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:



DOOR SIZE W x H INCHES (MM)	LATCHES	WEIGHT LBS	KG
12 x 12 (305 x 305)	1	14.3	6.5
18 x 18 (457 x 457)	1	26.5	12
24 x 24 (610 x 610)	1	44.0	20
24 x 36 (610 x 914)	2	64.0	29



DETAIL A
SCALE 1 : 6

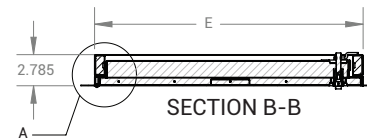

18 GA (.052)
SATIN COAT STEEL
DOOR AND FRAME

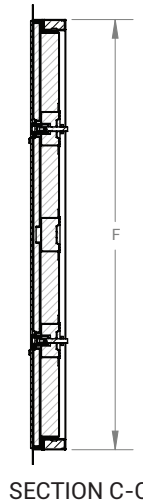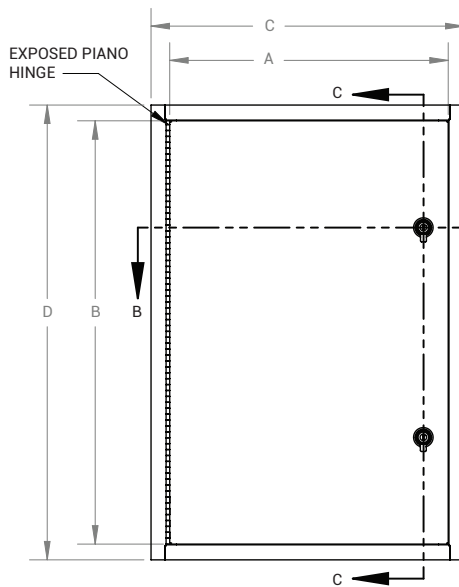

STAINLESS STEEL
PULL TAB

PROJECT DATA

Custom Sizes Available - Fast!

Scan or



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003





WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-ACF-2064

FLUSH ACOUSTICAL ACCESS DOOR

NOMINAL SIZE	A	B	C	D	E	F	LOCK QTY
12 x 12 (305mm x 305mm)	11.567 (294mm)	11.818 (300mm)	14.484 (368mm)	14.484 (368mm)	12.044 (306mm)	12.044 (306mm)	1
16 x 16 (406mm x 406mm)	15.567 (395mm)	15.818 (402mm)	18.484 (469mm)	18.484 (469mm)	16.044 (408mm)	16.044 (408mm)	1
18 x 18 (457mm x 457mm)	17.567 (446mm)	17.818 (453mm)	20.484 (520mm)	20.484 (520mm)	18.044 (458mm)	18.044 (458mm)	1
24 x 24 (610mm x 610mm)	23.567 (599mm)	23.818 (605mm)	26.484 (673mm)	26.484 (673mm)	24.044 (611mm)	24.044 (611mm)	1
24 x 36 (610mm x 914mm)	23.567 (599mm)	35.818 (910mm)	26.484 (673mm)	38.484 (977mm)	24.044 (611mm)	36.044 (915mm)	2

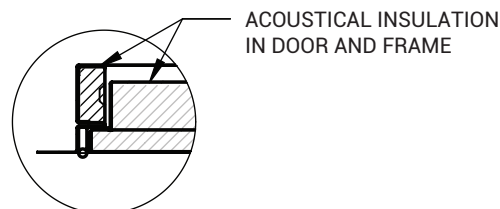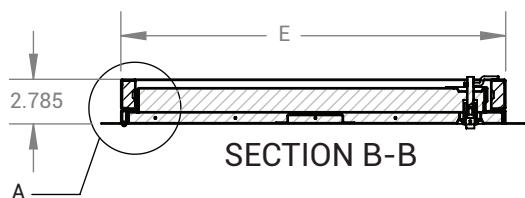

DETAIL A
SCALE 1 : 6

