



Quality Access Doors- **FAST!**

STANDARD OPTIONS

MATERIAL:

16 gauge cold rolled steel

HINGE: Pin and spring pin hinge, located on the second dimension (height)

LOCK / LATCH: Screwdriver operated cam latch in cold-rolled steel

FINISH: High quality white powder coat primer

PACKAGING: Individually wrapped, 1 door per box

FLANGE: 22-gauge galvanized steel, 1 1/8" drywall bead flange

FRAME: 1 5/8" in depth, made of cold rolled steel

OPTIONS AVAILABLE

LOCK / LATCH:

- Key-operated cylinder cam latch
- Mortise cam latch preparation
- Hex head cam latch

HANDLE:

- 4" handle-operated cam latch
- 4" Handle and key
- Operated cam latch

MATERIAL: Stainless steel (SS)

For a complete list of options visit
www.BestAccessDoors.com

Scan  or  Click



To view Pricing and
Additional Product Info.

**LEED READY: THIS PRODUCT
CONTRIBUTES TO LEED® CREDITS**



SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-AHFRLO-DF**


FLUSH REMOVABLE ACCESS DOOR

WITH DRYWALL BEAD FLANGE



■ INSTALLATION

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

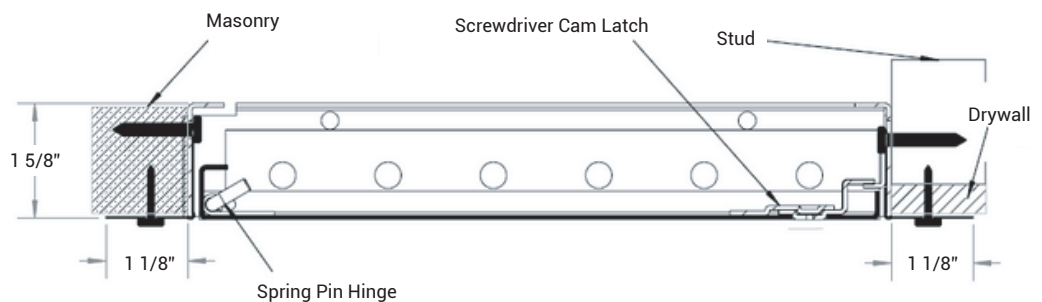


■ DIMENSIONS AND APPEARANCE

STANDARD DIMENSIONS:

DOOR SIZE W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
22 x 30 (558 x 762)	2	18.1	8.2
22 x 36 (558 x 914)	2	21.2	9.6
24 x 30 (609 x 762)	2	19.5	8.9
24 x 36 (609 x 914)	2	22.8	10.3
24 x 48 (609 x 1219)	2	29.4	13.3
30 x 30 (762 x 762)	4	25.0	11.3
30 x 36 (762 x 914)	4	26.8	12.1
36 x 36 (914 x 914)	4	31.3	14.2
36 x 48 (914 x 1219)	4	40.9	18.5
48 x 48 (1219 x 1219)	4	52.3	23.7

Rough wall opening is door size + 1/4" or + 6 mm

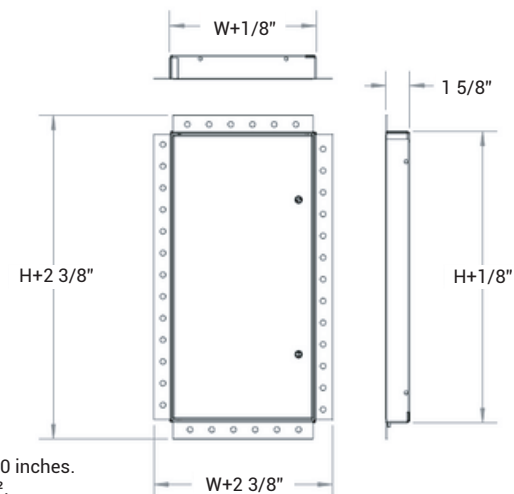

The AHU model is recommended for over 2304 sq. inch area or H over 60 inches.
Maximum dimensions: W ≤ 48 in, H ≤ 60 in, and W x H ≤ 2304 in².

■ PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-AHFRLO-DF

FLUSH REMOVABLE ACCESS DOOR WITH DRYWALL BEAD FLANGE

OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

LOW SECURITY LOCKING MECHANISM

- ☐ 35
Screwdriver operated cam latch
- ☐ 220
Screwdriver operated cylinder Cam latch
- ☐ 80
Ring/tool key operated slam latch
- ☐ 55
Hex head slam latch and ring key operated slam latch
- ☐ 30
Slide latch
- ☐ 50
Allen hex head cam latch

HANDLES

- ☐ 25
WITH KEY - 4" handle and key operated cam latch
- ☐ 100K
Key-operated recessed handle cam latch with cap over key path
- ☐ 20
WITHOUT KEY - 4" handle operated cam latch
- ☐ 22
WITHOUT KEY - 4" handle operated slam latch
- ☐ 21
WITHOUT KEY
Fixed 4" handle
- ☐ 26
WITHOUT KEY - L handle

MEDIUM SECURITY LOCKING MECHANISM

- ☐ 10
Key-operated cylinder cam latch
- ☐ 15
Mortise cam latch preparation 15C
- ☐ Mortise cam latch preparation, keyed differently 15CKA
- ☐ Mortise cam latch preparation, keyed alike
- ☐ 85
Mortise slam latch
- ☐ 85C
Mortise slam latch with cylinder
- ☐ 85CKA
Mortise slam latch cylinder keyed alike
- ☐ 90
Pinned hex head cam latch
- ☐ C
Cylinder cam latch, keyed differently
- ☐ CKA
Cylinder cam latch, keyed alike

MATERIALS

- ☐ GS
Galvanneal steel
- ☐ AL
Aluminum
- ☐ SS
Stainless steel
- ☐ CR
Cold rolled steel

HIGH SECURITY LOCKING MECHANISM

- ☐ 40
Mortise deadbolt lock
- ☐ 40C
Mortise Deadbolt Lock with Cylinder, keyed differently 40CKA
- ☐ 99
Inside release thumbturn for mortise deadbolt lock
- ☐ 45
Mortise preparation for detention deadbolt lock
- ☐ 46
Detention deadbolt lock
- ☐ 47
CIDetention deadbolt Key

OTHERS

- ☐ 60
Gasket
- ☐ 160
Holding cable
- ☐ 240
Masonry anchors