



Quality Access Doors- **FAST!**

STANDARD OPTIONS

MATERIAL: Cold-rolled steel, 20-gauge door, and 16-gauge frame

HINGE: Pin and spring pin hinge, located in the second dimension (height)

LOCK / LATCH: Screwdriver-operated cam latch

FINISH: High quality white powder coat primer

PACKAGING: Individually wrapped, 1 door per box

OPTIONS AVAILABLE

LOCK / LATCH:

- Key-operated cylinder cam latch
- Mortise slam latch (cylinder optional)
- Mortise deadbolt lock (Cylinder optional)

HANDLE:

- 4" handle-operated cam latch
- Fixed 4" handle
- 4" handle-operated slam latch
- 4" handle and key operated cam latch

MATERIAL: Stainless Steel (SS), Galvanneal steel (GS)

OTHER:

- Neoprene gasket
- Holding cable
- Double-leaf

For a complete list of options visit
www.BestAccessDoors.com

Scan  or  Click



To view Pricing and
Additional Product Info.

**LEED READY: THIS PRODUCT
CONTRIBUTES TO LEED® CREDITS**



SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-AHRLO**


LARGE OPENING REMOVABLE 20 GA ACCESS DOOR

WITH EXPOSED FLANGE



■ INSTALLATION


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

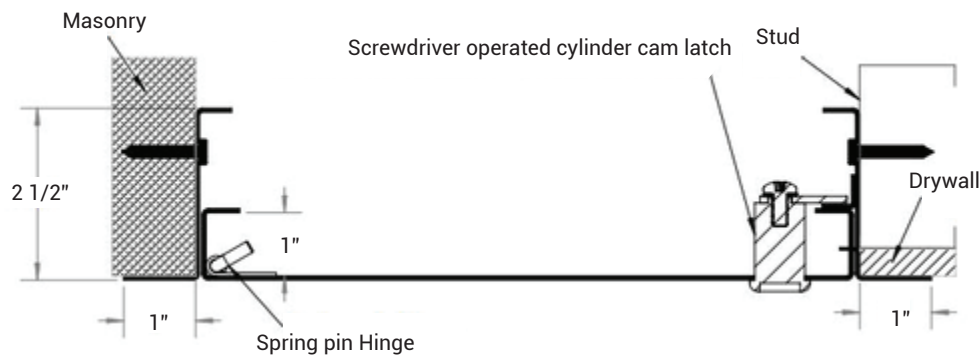

■ DIMENSIONS AND APPEARANCE

DOOR SIZE W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
22 x 30 (558 x 762)	1	17.4	7.9
22 x 36 (558 x 914)	2	20.1	9.1
24 x 30 (609 x 762)	1	18.4	8.3
24 x 36 (609 x 914)	2	21.2	9.6
24 x 48 (609 x 1219)	2	26.6	12.1
30 x 30 (762 x 762)	1	21.3	9.7
36 x 36 (914 x 914)	2	27.9	12.7
36 x 48 (914 x 1219)	2	35.6	16.2
36 x 72 (914 x 1828)	2	49.8	22.6
48 x 48 (1219 x 1219)	2	43.9	19.9

Rough wall opening door size + 1/4" or +6mm

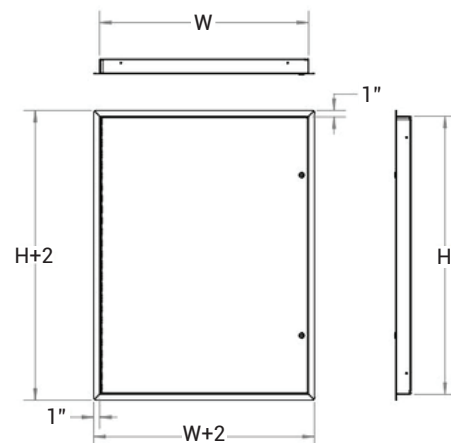

■ PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-AHRLO

LARGE OPENING REMOVABLE 20GA ACCESS DOOR WITH EXPOSED FLANGE

OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

LOW SECURITY LOCKING MECHANISM

- ☐ 35
Screwdriver operated cam latch
- ☐ 220
Screwdriver operated cylinder Cam latch
- ☐ 80
Ring/tool key operated slam latch
- ☐ 55
Hex head slam latch and ring key operated slam latch
- ☐ 30
Slide latch
- ☐ 50
Allen hex head cam latch

HANDLES

- ☐ 25
WITH KEY - 4" handle and key operated cam latch
- ☐ 100K
Key-operated recessed handle cam latch with cap over key path
- ☐ 20
WITHOUT KEY - 4" handle operated cam latch
- ☐ 22
WITHOUT KEY - 4" handle operated slam latch
- ☐ 21
WITHOUT KEY
Fixed 4" handle
- ☐ 26
WITHOUT KEY - L handle

MEDIUM SECURITY LOCKING MECHANISM

- ☐ 10
Key-operated cylinder cam latch
- ☐ 15
Mortise cam latch preparation 15C
- ☐ Mortise cam latch preparation, keyed differently 15CKA
- ☐ Mortise cam latch preparation, keyed alike
- ☐ 85
Mortise slam latch
- ☐ 85C
Mortise slam latch with cylinder
- ☐ 85CKA
Mortise slam latch cylinder keyed alike
- ☐ 90
Pinned hex head cam latch
- ☐ C
Cylinder cam latch, keyed differently
- ☐ CKA
Cylinder cam latch, keyed alike

MATERIALS

- ☐ GS
Galvanneal steel
- ☐ AL
Aluminum
- ☐ SS
Stainless steel
- ☐ CR
Cold rolled steel

HIGH SECURITY LOCKING MECHANISM

- ☐ 40
Mortise deadbolt lock
- ☐ 40C
Mortise Deadbolt Lock with Cylinder, keyed differently 40CKA
- ☐ 99
Inside release thumbturn for mortise deadbolt lock
- ☐ 45
Mortise preparation for detention deadbolt lock
- ☐ 46
Detention deadbolt lock
- ☐ 47
CIDetention deadbolt Key

OTHERS

- ☐ 60
Gasket
- ☐ 160
Holding cable
- ☐ 240
Masonry anchors