

## AT Series



---

### Acoustical Tile Access Doors

**Doors** are designed for use with acoustical tile or gypsum board walls and ceilings. The door is engineered to install flush, virtually concealed. Door is recessed 5/8" to accept acoustical tile or gypsum board.

**Door** is 16 gage and **frame** is 12 gage, galvanized steel with a white prime coat finish.

**Concealed Hinge** operates completely out of sight so that only the metal thickness of the door and frame is visible.

**Latch** is screwdriver operated.

### Guide Specification

Provide Elmdor® AT Series, Acoustical Tile Access Door (specify model number and options). Access door shall be fabricated from 16 gage and frame from 12 gage, galvanized steel with a white prime coat finish. Door shall be recessed 5/8" to accept acoustical tile or gypsum board. Hinge shall be concealed type. Latch shall be screwdriver operated.



Member of U.S. Green  
Building Council

AT

Revised: 10/25/16



Toll Free Phone: 1-800-483-0823  
International: +1-(718) 841-7448

Toll Free Fax: 1-888-828-6021  
Email: info@bestaccessdoors.com

Website: www.bestaccessdoors.com

### MODEL NUMBER AND OPTIONS SELECTION

#### BASE MODEL NUMBER

AT Acoustical Tile Access Door

#### Suffix Options

- AKL Allen Key Latch
- GB Galvanized Drywall Bead
- CL Cylinder Lock (one per door)
- CLD Cylinder Lock with Dust Shutter (one per door)
- SS Stainless Steel Construction (Type 304 No. 4 Satin Finish)



### STANDARD AVAILABLE SIZES

Special sizes available upon request.

| NOMINAL DOOR SIZE (W X H) | CEILING OPENING (minimum required) | LATCHES | WEIGHT    |
|---------------------------|------------------------------------|---------|-----------|
| AT 8" x 8"                | 8-1/8" x 8-1/8"                    | 1       | 4 lbs.    |
| AT 12" x 12"              | 12-1/8" x 12-1/8"                  | 1       | 5.5 lbs.  |
| AT 12" x 24"              | 12-1/8" x 24-1/8"                  | 2       | 9.5 lbs.  |
| AT 16" x 16"              | 16-1/8" x 16-1/8"                  | 2       | 8.5 lbs.  |
| AT 18" x 18"              | 18-1/8" x 18-1/8"                  | 2       | 10 lbs.   |
| AT 24" x 24"              | 24-1/8" x 24-1/8"                  | 2       | 16 lbs.   |
| AT 24" x 36"              | 24-1/8" x 36-1/8"                  | 3       | 24.5 lbs. |

#### NOTES:

1. TILE, BY OTHERS
2. CONCEALED HINGE
3. MOUNTING HOLES
4. SCREWDRIVER OPERATED LATCH
5. FRAME

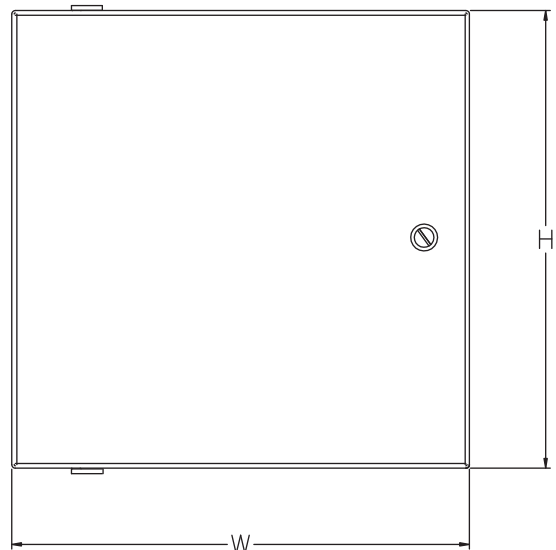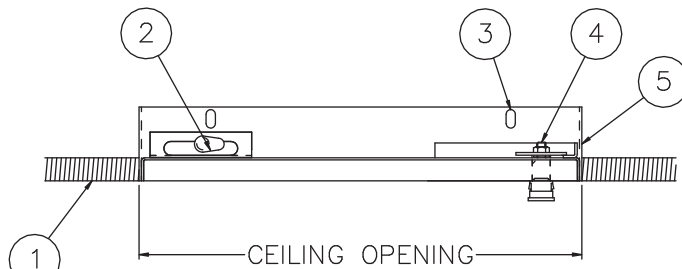

#### SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

|  |                |
|--|----------------|
| Model Number & Options _____               | Quantity _____ |
| Company _____                              | Date _____     |
| Contact _____                              | Title _____    |
| Approval for Manufacturing/Signature _____ |                |

**AT**

Revised: 10/25/16