



Quality Access Doors- **FAST!**

SUBMITTAL/TECHNICAL DATA SHEET

SPECIFICATION

DOOR AND TRIM: 14 GA. Steel. Door is recessed to accept up to 1" thick acoustical tile.

FRAME: 16 GA. Steel.

HINGE: Continuous piano hinge opens 180°, will be placed on long side of door unless otherwise requested.

LATCHES: Flush, stainless steel cam operated with screwdriver. Latches are positioned opposite hinge as well as top and bottom on larger sizes.

FINISH: Baked white enamel over rust-inhibiting phosphate treated steel.

OPTIONS (at additional cost)

Key operated medium barrel cylinder lock (key code 151)

EACH DOOR COMES COMPLETE WITH GROMMETS

For a complete list of options visit
www.BestAccessDoors.com

SKU: **BA-ATD**

METAL ACCESS DOOR FOR ACOUSTICAL TILE




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<


STANDARD SIZES:

DOOR SIZE W" X H"	WALL OPENING	NO. OF HINGES	CAM LATCH	SHIP WT. LBS.
12" X 12"	12 1/4" X 12 1/4"	1	1	8 LBS
12" X 24"	12 1/4" X 24 1/4"	1	2	13 LBS
18" X 18"	18 1/4" X 18 1/4"	1	3	15 LBS
24" X 24"	24 1/4" X 24 1/4"	1	3	26 LBS
24" X 36"	24 1/4" X 36 1/4"	1	4	33 LBS

ELEVATION



SECTION DETAIL

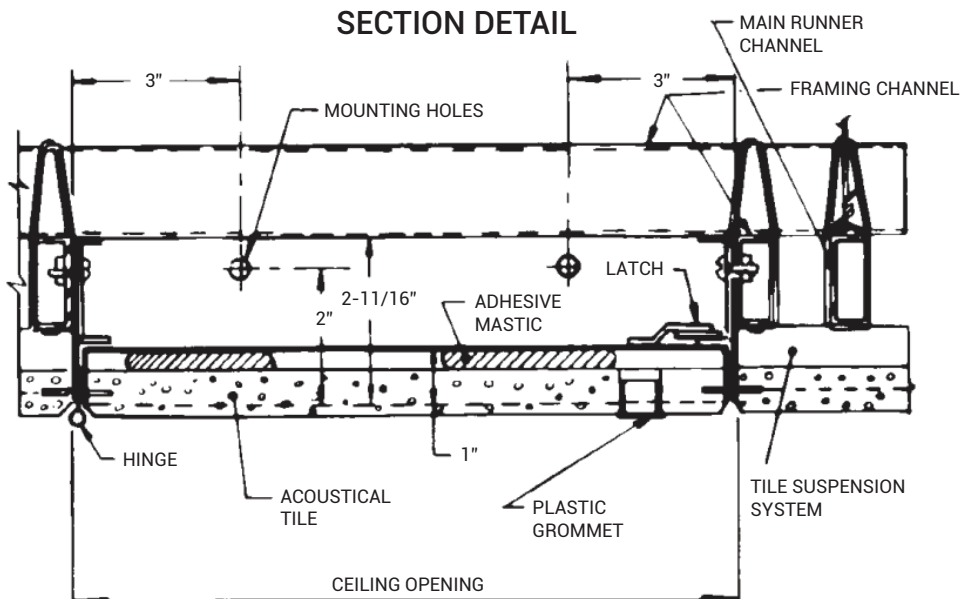

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and
Additional Product Info.

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com