

ADVANTAGES

- CF aluminum ceiling access doors provide convenient access to services or controls located in ceilings.
- Units are installed by bolting the hanger brackets to the hanger rods furnished and installed by contractor.
- The aluminum cover and frame with stainless steel hinges produce a strong, lightweight, corrosion-resistant assembly.
- Covers open upward smoothly on continuous hinges.
- Downward opening models are available.

SPECIFICATIONS

MATERIAL: 1/4" extruded aluminum frame and 1/8" aluminum plate door panel

FINISHES: Mill Finish Aluminum

HINGE: Stainless Steel Continuous Hinge

LOCK: For downward swing model only, covers have an automatic snap latch with removable outside handle.

For a complete list of options visit www.BestAccessDoors.com

Scan or Click



To view Pricing and Additional Product Info.

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-CF-2-DS FLUSH ALUMINUM DOORS**

FOR SUSPENDED CEILINGS



■ DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<


UPWARD SWING:

STYLE	LEAF TYPE	DIMENSIONS CENTER TO CENTER OF ANGLES OR TEES	MODEL NUMBER	SHIP. WEIGHT LBS.
CF-1 US	SINGLE	2'-6" x 2'-6"	3520-201-9	35
CF-2 US	SINGLE	2'-6" x 3'-0"	3520-204-9	40
CF-3 US	DOUBLE	2'-6" x 2'-6"	3520-207-9	45


DOWNWARD SWING:

STYLE	LEAF TYPE	DIMENSIONS CENTER TO CENTER OF ANGLES OR TEES	MODEL NUMBER	SHIP. WEIGHT LBS.
CF-1 DS	SINGLE	2'-6" x 2'-6"	3520-217-9	35
CF-2 DS	SINGLE	2'-6" x 3'-0"	3520-220-9	40
CF-3 DS	DOUBLE	2'-6" x 2'-6"	3520-225-9	45

UPWARD SWING INSTALLATION DETAILS:



DOWNWARD SWING INSTALLATION DETAILS:

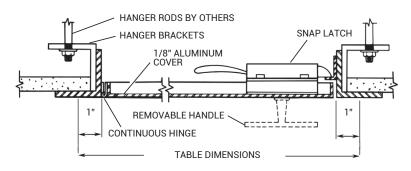

■ PROJECT DATA

Custom Sizes Available - Fast!

	PROJECT NAME :	QTY	W	Н	OPTIONS
	ARCHITECT:				
2	DEALER:				
	CONTRACTOR:				
	LOCATION:	SPECIAL INSTRUCTIONS:			
	DATE:				
	TAGGING INSTRUCTIONS:	SUBMITTAL APPROVAL : (signature or stamp)			



TELEPHONE: 1-800-483-0823 FAX: 1-888-828-6021



228 PARK AVE. S. #76520 NEW YORK, NY, 10003



WEBSITE: www.BestAccessDoors.com