



SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTIONS

The DSC-210 is designed so that all makes and types of tile thicknesses up to 1" fit snugly into the recess of the panel. Our unique concealed pivoting bar hinge operates completely out of sight so only the metal thickness of the door and frame is visible.

SPECIFICATION

CONSTRUCTION:

- Frame shall be 14 gauge steel and door shall 16 gauge steel.
- Door shall be recessed 1".
- Hinge shall be concealed pivoting rod type.
- Locks shall be flush and screwdriver operated with cam and studs, or shall be key operated cylinder lock with automatic dust shutter.
- Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel.

SKU: **BA-DSC-210**


RECESSED ACCESS DOOR

FOR ACOUSTICAL TILE




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

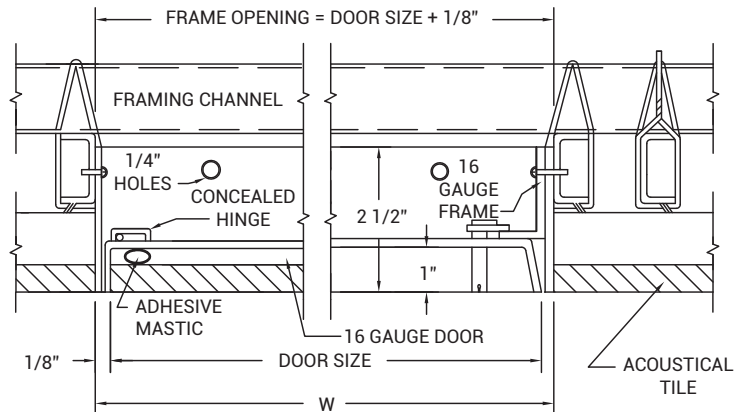

STANDARD SIZES:

DOOR SIZE W x H (IN.)	WALL/CEILING OPENING (IN.)	NUMBER OF STUD LATCHES	SHIP WT. (LBS.)
12 x 12	12 1/8 x 12 1/8	1	6.7
18 x 18	18 1/8 x 18 1/8	2	12.4
12 x 24	12 1/8 x 24 1/8	2	10.6
24 x 24	24 1/8 x 24 1/8	2	19.2
24 x 36	24 1/8 x 36 1/8	2	32.0

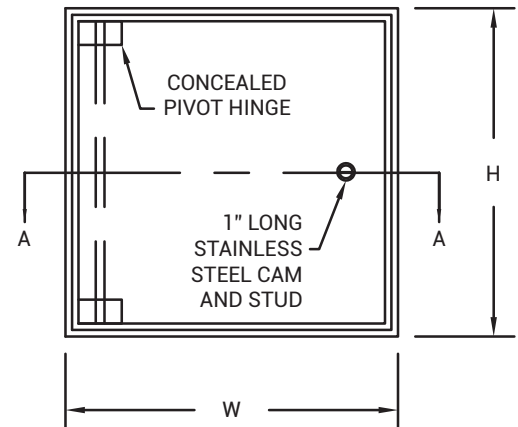

For a complete list of options visit
www.BestAccessDoors.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com