



Quality Access Doors- FAST!

# SUBMITTAL/TECHNICAL DATA SHEET

## APPLICATION

Designed to provide access in walls and ceilings, while maintaining an invisible, architecturally pleasing appearance.

## FEATURES

- Designed to accommodate 5/8" drywall.
- Standard with a touch latch feature

## SPECIFICATIONS

**MATERIALS:** Aluminum extrusion with 5/8" drywall in door panel.

**DOOR:** .080" aluminum extrusion.

**DOOR FRAME:** .080" aluminum extrusion recessed to provide similar edge to drywall bead to allow for finishing of wall or ceiling surface.

**HINGE:** Hinge allows door panel to open to 90 degrees, and also allows for door panel to be removed from frame. Safety chain installed on door & frame for safety.

**STANDARD LATCH:** Concealed Touch Latches.

**OPTIONAL LATCHES/LOCKS:** Slotted Screwdriver Cam Latch, allen head cam latch, spanner head cam latch, cylinder lock & key.

**FINISH:** Mill Finish. Drywall is ready to be finished to match surrounding wall or ceiling surface.

SKU: **BA-DW-5058-R**

# RECESSED CIRCULAR DOOR WITH DRYWALL



## DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING](#) <<


### STANDARD SIZES:

DOOR DIA. INCHES	(MM)	WEIGHT	
		LBS	KG
12	305	2.0	0.9
16	406	5.0	2.3
18	457	6.0	2.7
24	610	12.0	5.5

Wall opening is normal door size plus +3/8" (9.5mm)

For detailed specifications see submittal sheet

### MANUFACTURED BY ACUDOR

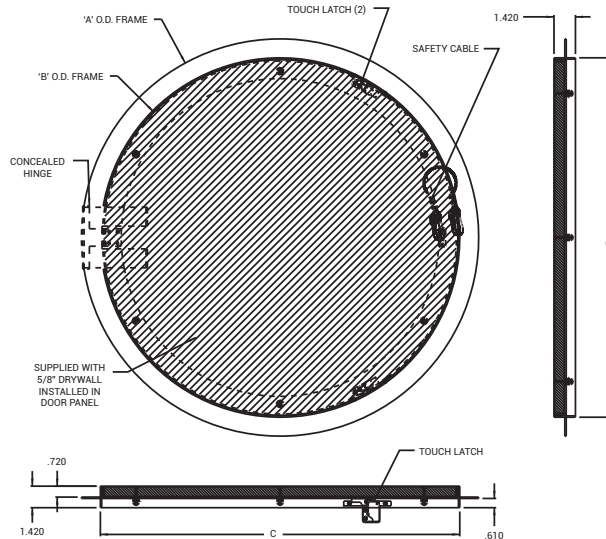

For a complete list of options visit [www.BestAccessDoors.com](http://www.BestAccessDoors.com)

## PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



228 PARK AVE. S. #76520  
NEW YORK, NY, 10003




WEBSITE:  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)  
E-MAIL:  
[info@bestaccessdoors.com](mailto:info@bestaccessdoors.com)

**BA-DW-5058-R**

**CIRCULAR DOOR  
RECESSED WITH DRYWALL**

QTY	NOMINAL SIZE	WALL OPENING SIZE	A	B	C	LOCK
	12" (305mm)	12.125" (308mm)	14.50" (368mm)	11.75" (298mm)	12" (305mm)	2
	16" (406mm)	16.125" (409mm)	18.50" (470mm)	15.75" (400mm)	16" (406mm)	2
	18" (457mm)	18.125" (460mm)	20.50" (521mm)	17.75" (451mm)	18" (457mm)	2
	24" (610mm)	24.125" (613mm)	26.50" (667mm)	23.75" (603mm)	24" (610mm)	2

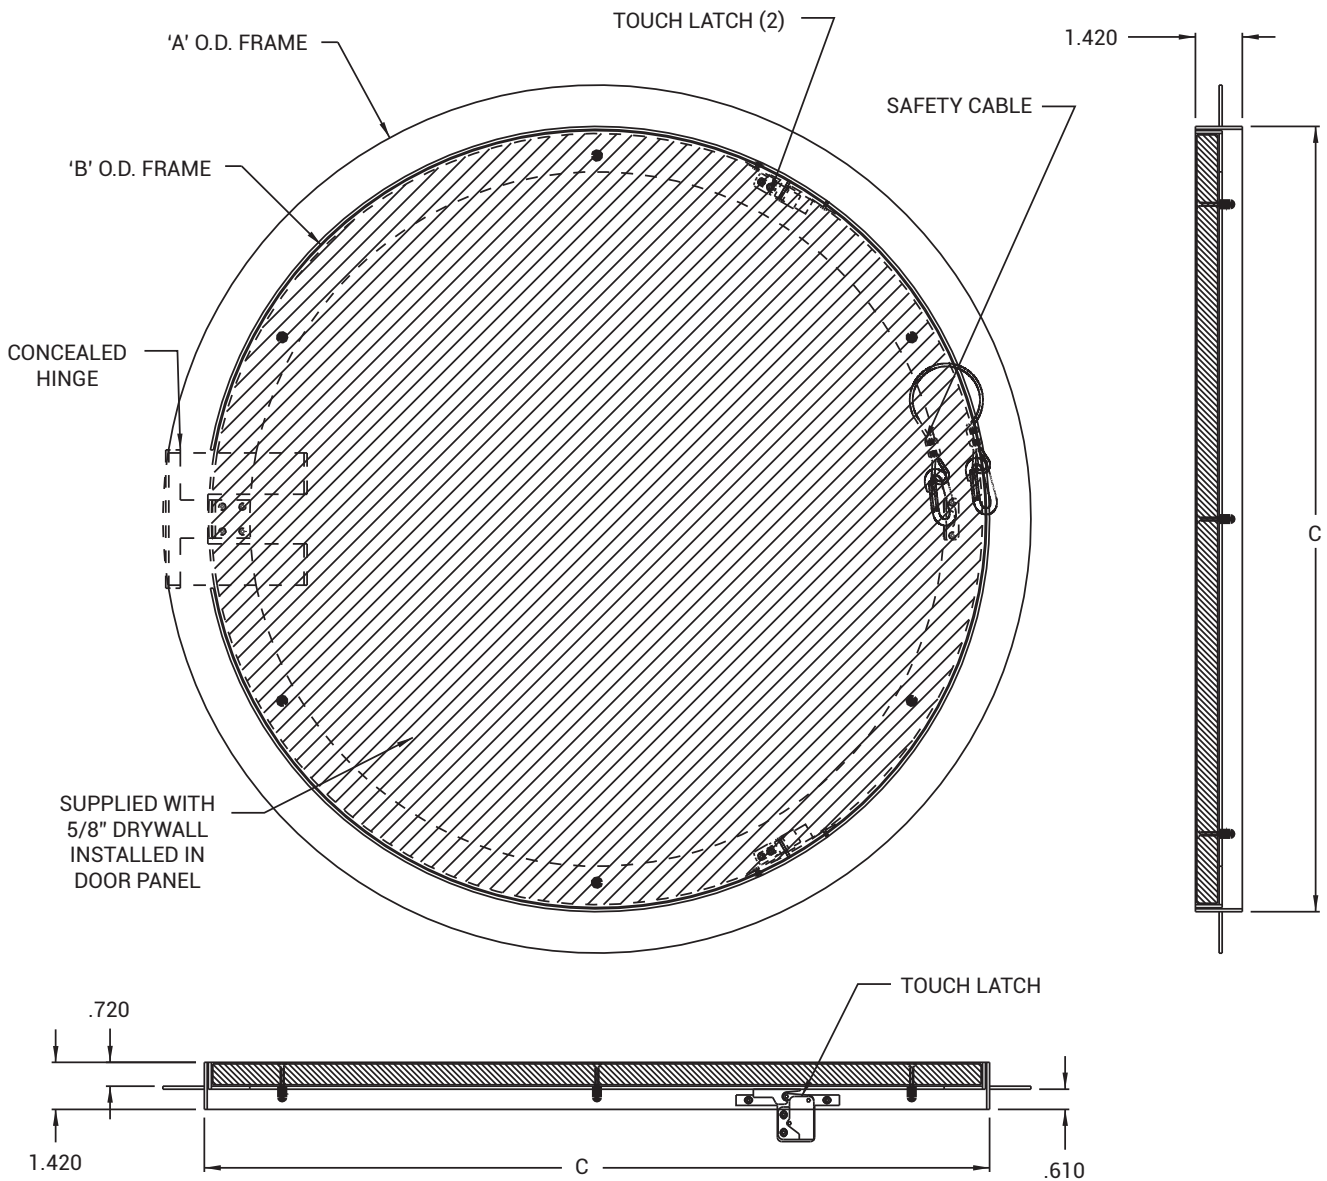

MANUFACTURED BY ACUDOR