



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

The DWK knee wall access door is a product designed for installation in knee walls. It enables access to non-habitable room located behind a knee wall. It can be installed with left or right direction of opening. Equipped as standard with wooden finishing slats.

FEATURES

- Ready for quick installation
- 3 years warranty

SPECIFICATIONS

DOOR:
Insulated with a thickness: 1 3/8"
Thermal insulation thickness: 1 1/8"
Finished on both sides with white HDF board.

FRAME:
Made of pinewood.
Depth (Jamb): 3 3/8"
Equipped with a seal.

EQUIPMENT:
Handle
1 3/8" wide wooden finishing slats in natural colour.



SKU: BA-DWK

KNEE WALL ACCESS DOOR

INSULATED

■ DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

SIZES:

No.	Size
1	21 x 31
2	27 x 35

TECHNICAL PARAMETERS:


No.	Description	Value	Standard
1	Door heat transfer coefficient	U = 0.11 BTU/hft²F	PN-EN 10211:2008

* Manufacturer's internal calculations for the middle part of the sash

ASSEMBLY INFORMATION

DWK knee wall door comes pre assembled and must be installed in framed rough opening in accordance with the included fitting instructions. One must ensure that the gap between door frame and rough opening framing is properly insulated.

For more detailed information check the second page

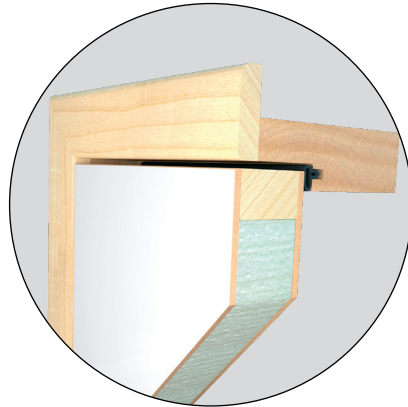

For a complete list of options visit www.BestAccessDoors.com

■ PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-DWK

INSULATED KNEE WALL ACCESS DOOR

Dimension W x H		21 x 31	27 x 35
Rough opening [in.]	A x B	21½ x 31¼	27½ x 35¼
Frame external dimensions [in.]	W x L	21 x 31	27 x 35
Frame internal dimensions [in.]	M x N	19 x 28¾	24¾ x 32¾
Frame depth [in.]	S	3¾	
Frame thickness[in.]	Z	1	

