



Quality Access Doors- **FAST!**

APPLICATION

The DWT highly insulated knee wall access door is a product designed primarily for installation in knee walls. It enables access to non-habitable room located behind a knee wall, and at the same time provides excellent insulation barrier and ensures high tightness.

FEATURES

- Ready for quick installation
- 3 years warranty

SPECIFICATIONS

DOOR:

Insulated, total thickness: 2½"
Thermal insulation thickness: 2¾"
Finished on both sides with white HDF board.

FRAME:

Made of pinewood.
Depth (Jamb): 3½"
Equipped with a seal.

EQUIPMENT:

Handle
1¾" wide wooden finishing slats in natural colour.

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-DWT**

KNEE WALL ACCESS DOOR



DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

SIZES:

No.	Size
1	21 x 31
2	27 x 35

TECHNICAL PARAMETERS:


No.	Description	Value	Standard
1	Door heat transfer coefficient	U = 0.11 BTU/hft²F	PN-EN 10211:2008
2	Tightness	4th class*	EN 12207

* Manufacturer's internal calculations

ASSEMBLY INFORMATION

DWT knee wall door comes pre assembled and must be installed in framed rough opening in accordance with the included fitting instructions. One must ensure that the gap between door frame and rough opening framing is properly insulated.

For more detailed information check the second page

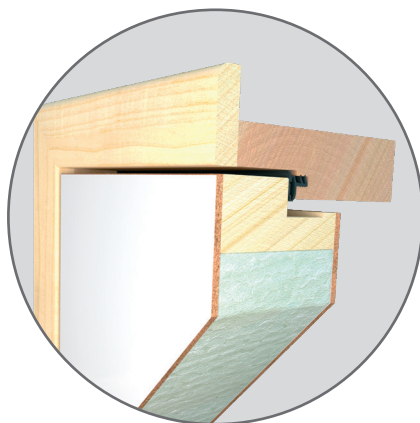



For a complete list of options visit
www.BestAccessDoors.com

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and
Additional Product Info.



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-DWT

KNEE WALL ACCESS DOOR

Dimension W x H		21 x 31	27 x 35
Rough opening [in.]	A x B	21½ x 31¼	27½ x 35¼
Frame external dimensions [in.]	W x L	21 x 31	27 x 35
Frame internal dimensions [in.]	M x N	19 x 28¾	24¾ x 32¾
Frame depth [in.]	S	3½	
Frame thickness [in.]	Z	1	

