



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTIONS

The flashing for profiled and high-profiled corrugated materials joins the skylight with roofing materials such as tiles or corrugated metal sheets. A wider and longer lower section allows a tighter joint with the high profiled roofing material (the profile depth of up to 3 1/2"). A butyl strip holds down the bottom section of flashing.

SPECIFICATIONS

FLASHING MATERIAL:
Aluminium sheet metal

FLASHING TYPE:
Standard

ROOF COVERING TYPE:
High profile up to 90 mm or 120 mm (H)


SIZE:
14"x46", Outside Curb: 17 1/2"x49 1/2"

WARRANTY (YEARS):
10

For a complete list of options visit
www.BestAccessDoors.com

SKU: **BA-EH-C**

FLASHING FOR CURB MOUNTED SKYLIGHTS


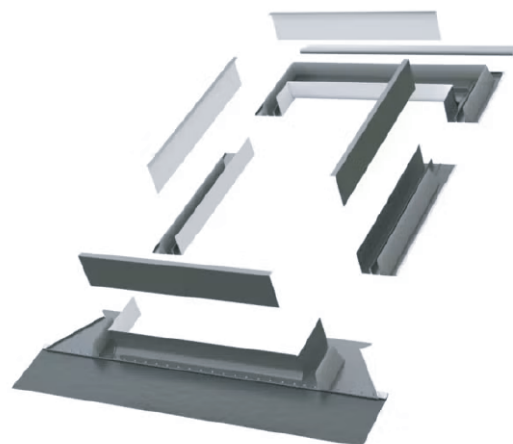


DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

Window size[in]	Skylight dimension				Outside curb				Inside curb			
	S [in]	L [in]	S [mm]	L [mm]	W [in]	R [in]	W [mm]	R [mm]	B [in]	K [in]	B [mm]	K [mm]
22x22	27 1/4	27 1/4	691	691	25 1/2	25 1/2	648	648	22 1/2	22 1/2	572	572
22x30	27 1/4	35 1/4	691	894	25 1/2	33 1/2	648	851	22 1/2	30 1/2	572	775
22x34	27 1/4	39 1/8	691	995	25 1/2	37 1/2	648	952	22 1/2	34 1/2	572	876
22x46	27 1/4	51 1/4	691	1300	25 1/2	49 1/2	648	1257	22 1/2	46 1/2	572	1181
22x70	27 1/4	75 1/8	691	1909	25 1/2	73 1/2	648	1867	22 1/2	70 1/2	572	1790
30x30	35 1/4	35 1/4	894	894	33 1/2	33 1/2	851	851	30 1/2	30 1/2	775	775
30x46	35 1/4	51 1/4	894	1300	33 1/2	49 1/2	851	1257	30 1/2	46 1/2	775	1181
34x34	39 1/8	39 1/8	995	995	37 1/2	37 1/2	952	952	34 1/2	34 1/2	876	876
34x46	39 1/8	51 1/4	995	1300	37 1/2	49 1/2	952	1257	34 1/2	46 1/2	876	1181
46x46	51 1/4	51 1/4	1300	1300	49 1/2	49 1/2	1257	1257	46 1/2	46 1/2	1181	1181

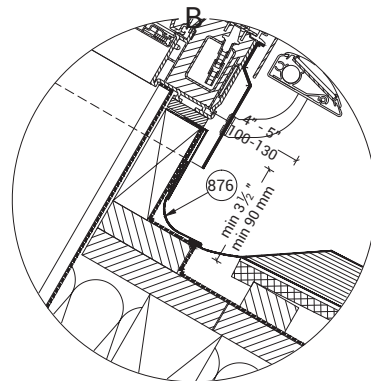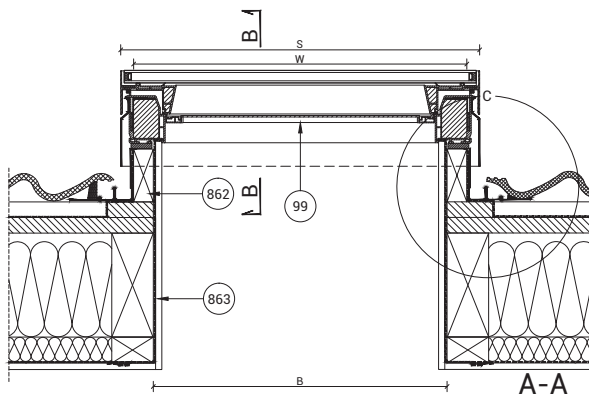

For more details see the second page

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL :			
TAGGING INSTRUCTIONS :	(signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021






228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-EH-C

FLASHING FOR CURB MOUNTED SKYLIGHTS

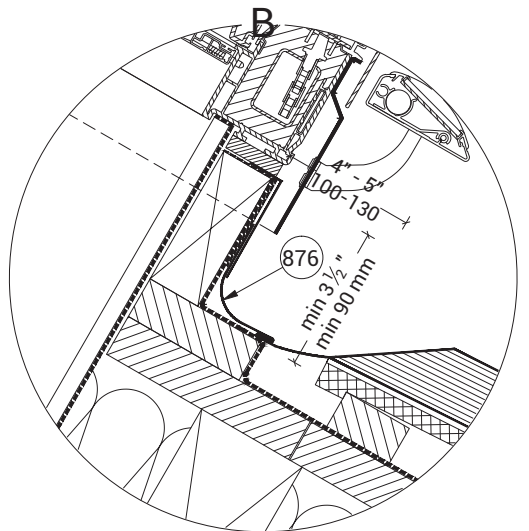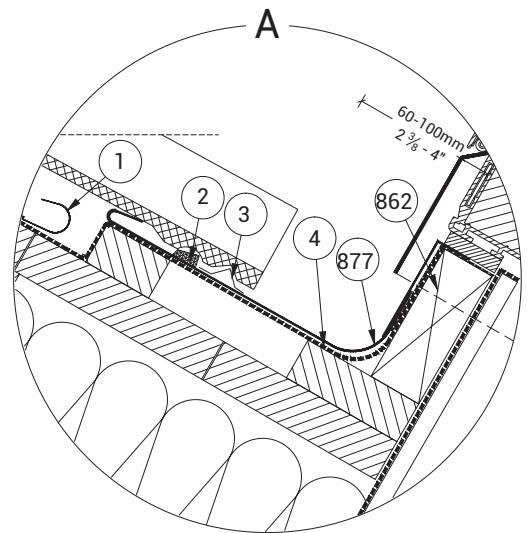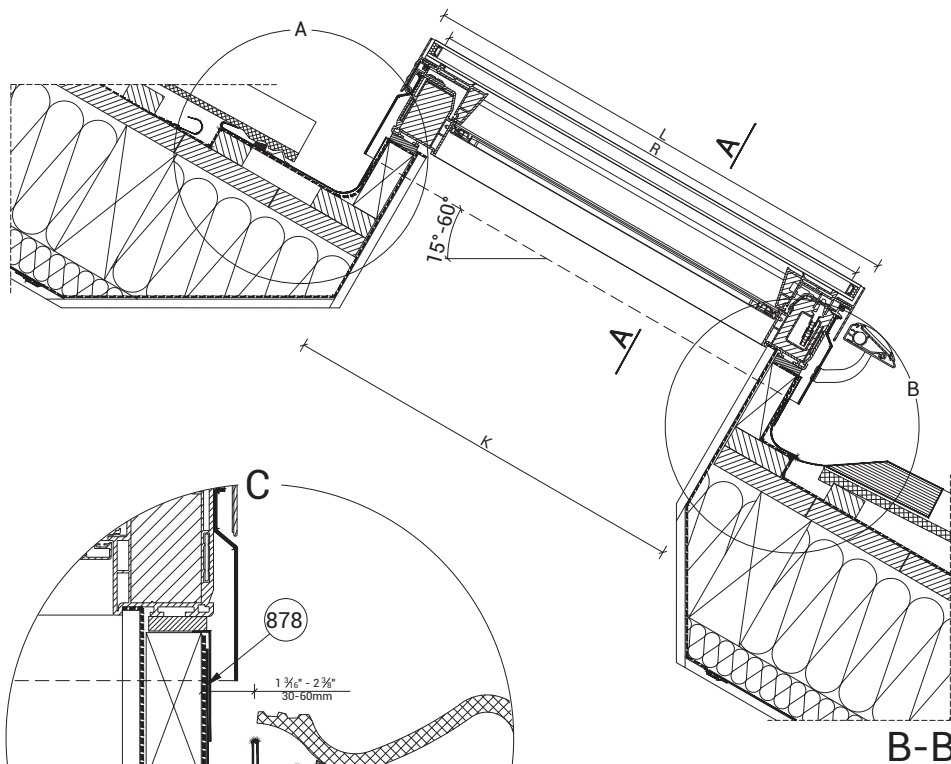

- 1-water draining gutter
- 2-polyurethane insulating wedge
- 3-Tile supporting profile
- 4- ice and water guard by others
- 99-FVC-S solar powered skylight FAKRO
- 862- 1 12\" width curb by others
- 863-Drywall by others
- 876-EH-C FAKRO flashing lower element
- 877-EH-C FAKRO top part of the flashing
- 878-EH-C FAKRO flashing side element

