

Drywall Access Panel with Fixed Hinges

Aluminum frame, with drywall inlay, for ceilings, drywall, and various applications - System F1

Description

The access panel consists of a welded aluminum frame and is available with 1/2" (12.7 mm) or 5/8" (15.9 mm) inlaid drywall and two latches.

Both an outer and an inner frame assembly consists of high grade aluminum which is bonded with a special welding process.



For sizes 12" x 12" (305 mm x 305 mm) and up the access panels are equipped with a safety-system to prevent accidental opening. This safety system must be resecured after each opening.

The reveal of 1/16 of an inch (1.59 mm) is visible between the outer frame and door hatch. The concealed snap locks open the access panel when pressure is applied to the spring loaded latch side.

NEW




Ready-to-paint door leaf

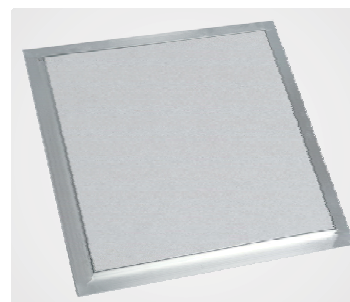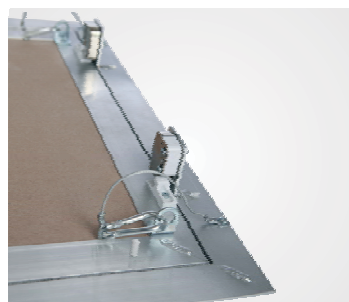

System F1	Dimensions	
Code	A inch mm	B inch mm
203203G127	8" 203	8" 203
305305G127	12" 305	12" 305
406406G127	16" 406	16" 406
508508G127	20" 508	20" 508
610610G127	24" 610	24" 610

All standard sizes are available in 1/2" (12.7 mm) or 5/8" (15.9 mm) drywall.

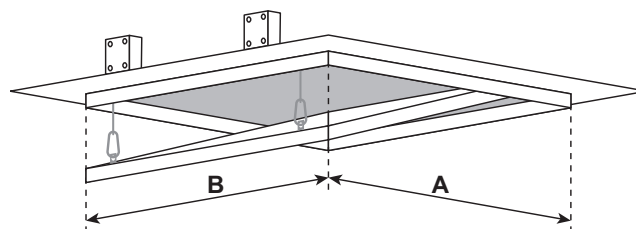

Customized solutions

Customized sizes can be produced in every dimension upon request.

Drywall insert with screws on larger sizes than 24" x 24" (610 mm x 610 mm).

Options

SD	Screwdriver operated cam latch
FS	Screwdriver operated four-square cam latch
Z	Round Cylinder Lock with Key
M	Mortise Cylinder Lock Preparation
H	Hex Head Cam Latch
P	Pinned Hex Head Cam Latch

Advantages of BestAccessDoors Panels

- Superior engineering & innovative design
- Fast delivery
- Quick and easy installation
- Solid aluminum frame
- Flush installation in ceilings and walls
- Available in moisture / mildew resistant green board and cement board

Rough opening is door size + 3/8" (9 mm)



Best Access Doors