



Quality Access Doors- FAST!

STANDARD OPTIONS

MATERIAL:

16 gauge cold rolled steel

HINGE:

Continuous piano hinge, located in the second dimension (height)

LOCK / LATCH:

Self-latching tool-key operated slam latch and/or ring operated slam latch, both included

INSIDE PANEL RELEASE:

Mechanism allowing panels to open from inside, standard on all doors over 12" x 12"

AUTOMATIC PANEL CLOSER:

Standard on all doors

FINISH:

High quality white powder coat primer

PACKAGING:

Individually wrapped, 1 per box

OPTIONS AVAILABLE

LOCK / LATCH:

- Key operated cylinder cam latch
- Hex head slam latch
- Mortise deadbolt lock
- Handle operated slam latch
- Mortise preparation for cylinder (cylinder optional)

MATERIAL:

Stainless steel 304 #4 (brushed finish)

MASONRY ANCHOR:

Available on all sizes

For a complete list of options visit
www.BestAccessDoors.com

Scan  or  Click



To view Pricing and
Additional Product Info.

**LEED READY: THIS PRODUCT
CONTRIBUTES TO LEED® CREDITS**



SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-FRLC**

FIRE-RATED UNINSULATED ACCESS DOOR


WITH EXPOSED FLANGE



INSTALLATION

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

[2 HOUR WALL APPLICATION]

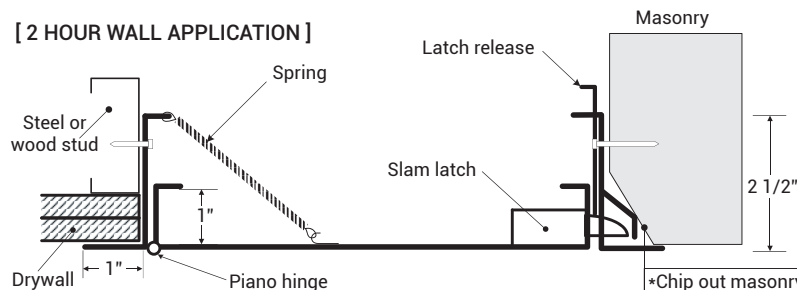


Authorities Having Jurisdiction (AHJ) should be consulted in all cases as to the particular requirements covering the installation and use of fire rated access doors.

DIMENSIONS AND APPEARANCE

STANDARD SIZES:

DOOR SIZE W x H inches (MM)	NUMBER OF LOCKS	WEIGHT LBS	KG
8 x 8 (203 x 203)	1	6.1	2.8
10 x 10 (254 x 254)	1	7.7	3.5
12 x 12 (304 x 304)	1	9.3	4.2
14 x 14 (355 x 355)	1	11.3	5.1
16 x 16 (406 x 406)	1	13.2	6.0
18 x 18 (457 x 457)	1	15.4	7.0
22 x 22 (558 x 558)	1	20.4	9.3
22 x 30 (558 x 762)	1	25.2	11.4
22 x 36 (558 x 914)	2	29.8	13.5
24 x 24 (609 x 609)	1	22.8	10.3
24 x 36 (609 x 914)	2	31.5	14.3
30 x 30 (762 x 762)	1	31.9	14.5
32 x 32 (812 x 812)	2	35.8	16.2
36 x 36 (914 x 914)	2	42.3	19.2
48 x 48 (1219 x 1219)	2	62.9	28.1

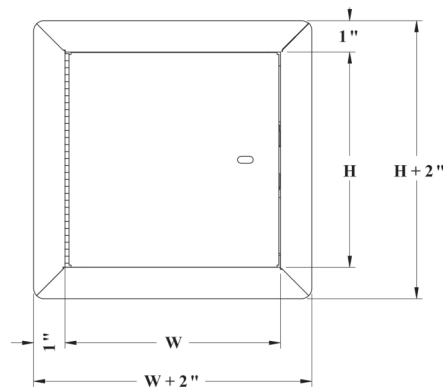

Rough Wall Opening is Door Size + 1/4" or + 6mm

Fire Rating Information on Page 3

Check Second Page for Complete Option List

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@BestAccessDoors.com



BA-FRLC

FIRE RATED UNINSULATED ACCESS PANEL WITH EXPOSED FLANGE

OPTIONS

This comprehensive list includes all available options. Please consult our catalog or contact our customer service to verify the feasibility of your chosen combination.

LOW SECURITY LOCKING MECHANISM

- ☐ 35
Screwdriver operated cam latch
- ☐ 220
Screwdriver operated cylinder Cam latch
- ☐ 80
Ring/tool key operated slam latch
- ☐ 55
Hex head slam latch and ring key operated slam latch
- ☐ 30
Slide latch
- ☐ 50
Allen hex head cam latch

HANDLES

- ☐ 25
WITH KEY - 4" handle and key operated cam latch
- ☐ 100K
Key-operated recessed handle cam latch with cap over key path
- ☐ 20
WITHOUT KEY - 4" handle operated cam latch
- ☐ 22
WITHOUT KEY - 4" handle operated slam latch
- ☐ 21
WITHOUT KEY
Fixed 4" handle
- ☐ 26
WITHOUT KEY - L handle

MEDIUM SECURITY LOCKING MECHANISM

- ☐ 10
Key-operated cylinder cam latch
- ☐ 15
Mortise cam latch preparation 15C
- ☐ Mortise cam latch preparation, keyed differently 15CKA
- ☐ Mortise cam latch preparation, keyed alike
- ☐ 85
Mortise slam latch
- ☐ 85C
Mortise slam latch with cylinder
- ☐ 85CKA
Mortise slam latch cylinder keyed alike
- ☐ 90
Pinned hex head cam latch
- ☐ C
Cylinder cam latch, keyed differently
- ☐ CKA
Cylinder cam latch, keyed alike

MATERIALS

- ☐ GS
Galvanneal steel
- ☐ AL
Aluminum
- ☐ SS
Stainless steel
- ☐ CR
Cold rolled steel

HIGH SECURITY LOCKING MECHANISM

- ☐ 40
Mortise deadbolt lock
- ☐ 40C
Mortise Deadbolt Lock with Cylinder, keyed differently 40CKA
- ☐ 99
Inside release thumbturn for mortise deadbolt lock
- ☐ 45
Mortise preparation for detention deadbolt lock
- ☐ 46
Detention deadbolt lock
- ☐ 47
CIDetention deadbolt Key

OTHERS

- ☐ 60
Gasket
- ☐ 160
Holding cable
- ☐ 240
Masonry anchors

■ FIRE RATING

FOR VERTICAL USE ONLY:


CERTIFIED TO STANDARDS: UL 10B (2008) (R2020), NFPA 252 (2022), CAN/ULC S104 (2015) (R2020).

RATING ACHIEVED: 3 hours, neutral/negative pressure

MAXIMUM SIZE: 48" wide x 48" high (1219mm x 1219 mm). Maximum area of 2304 in². Tolerance on height and width limitation is $\pm 3"$ (76 mm) as long as the area does not exceed 2304 in².

TEMPERATURE RISE: No rating achieved.

■ INSTALLATION: WALLS

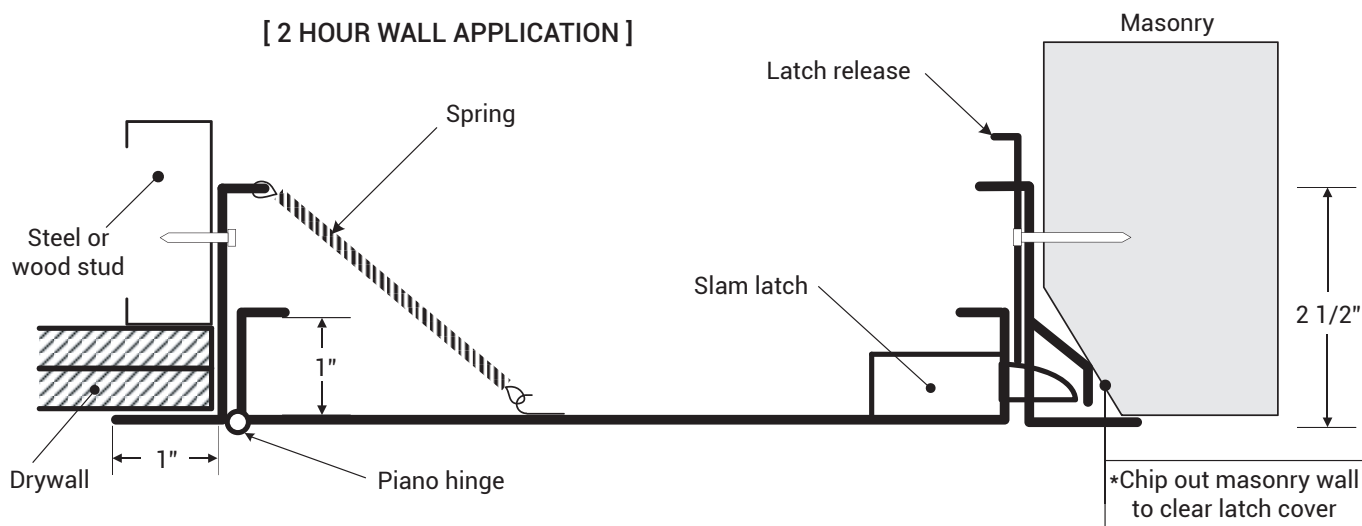

Authorities Having Jurisdiction (AHJ) should be consulted in all cases as to the particular requirements covering the installation and use of fire rated access doors.



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVENUE
S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@BestAccessDoors.com