



Quality Access Doors- **FAST!**

APPLICATIONS

Installation
0°-60°
0°-14° (no flashing required)
15°-60° (EL-C or EH-C flashing required)
Curb mounted

FEATURES


- Suitable for roof pitches between 0-60 degrees
- Infinity glass – virtually frameless surface
- Low-emission and heat-reflecting double glazing with argon gas
- White finished PVC frame interior
- Mosquito screen included
- Powered by solar panel with built in battery and rain sensors
- Warm spacer increases condensation resistance
- Channel built into the inner frame of the skylight collects moisture and drains it to the outside

For a complete list of options visit
www.BestAccessDoors.com

SUBMITTAL/TECHNICAL DATA SHEET


SKU: **BA-FVC-S**

CURB-MOUNTED SOLAR VENTING SKYLIGHT

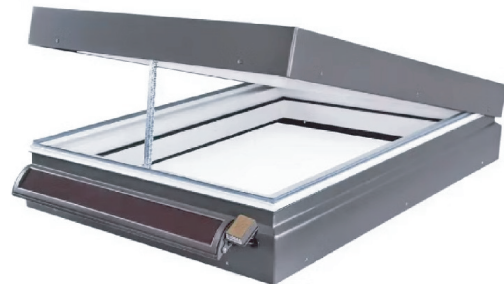

DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

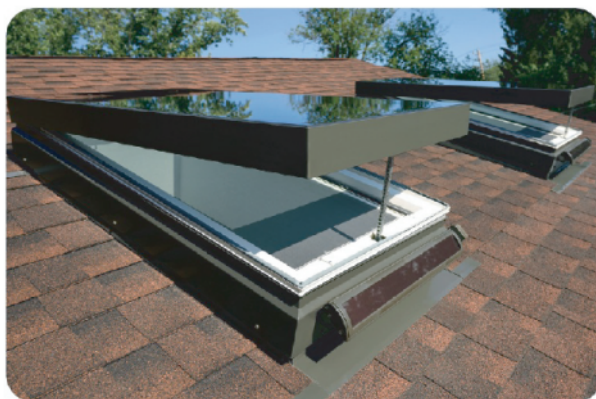

FEATURES:

Technical parameters	Multi chamber, insulated PVC frame with white finish (EPS insulation)
Outer frame material	Aluminum with black finish (powder coated, RAL9005)
Glazing	10 years for skylights, 20 years for laminated glass against hail (restrictions apply)
Warranty	G53 Low-E laminated, triple-pane glazing unit with warm TGI spacer and argon gas

For more details see the second page

ADDITIONAL PRODUCTS TO BE USED:

Flashings	EH-D - for roof tiles, corrugated metal and standing seam EL-D - for shingles and shakes
Ice and Water Guard	- FAKRO Euroband or similar self-adhesive underlayment
Internal accessories	- SRF blackout blind, SRP light reducing blind

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan  or  Click



To view Pricing and
Additional Product Info.

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-FVC-S

CURB-MOUNTED
SOLAR VENTING SKYLIGHTS

DIMENSIONS:

Size											
		22/22	22/30	22/34	22/46	22/70	30/30	30/46	34/34	34/46	46/46
Outside curb dimensions (WxR)	in.	25½ x 25½	25½ x 33½	25½ x 37½	25½ x 49½	25½ x 73½	33½ x 33½	33½ x 49½	37½ x 37½	37½x 49½	49½ x 49½
Outside frame (SxL)	in.	27¼ x 27¼	27¼ x 35¼	27¼ x 39½	27¼ x 51¼	27¼ x 75½	35¼ x 35¼	35¼ x 51¼	39½ x 39½	39½ x 51¼	51¼ x 51¼

TECHNICAL PARAMETERS:

Technical parameters	Glazing unit type		
	Unit	G33	Rating
U-factor	[BTU/h ft²F]	0.56	NFRC 100
Solar Heat Gain Coefficient	-	0.22	NFRC 200
Air Leakage	[cfm/ft²] @ 1.57 psf, tested size 46x46	<0.3	NFRC 400
Visible Transmittance	-	0.42	NFRC 200
UV protection	-	0.2	EN 410-2011
Condensation Resistance	-	56	NFRC 500
Water Penetration Resistance Test Pressure	[Pa]	580	(NAFS 2011) & A440S1-17

