



Quality Access Doors - FAST!

APPLICATIONS

Installation required roof pitch
15°-85° deck mounted.

FEATURES

- Suitable for roof pitches between 15-85 degrees
- Low-emission and heat-reflecting double glazed glass
- Warm spacer increases condensation resistance
- Perimeter gasket underneath the frame
- Range of internal and external accessories available
- Internal gasket system to collect and drain any possible condensation water to the outside

SPECIFICATIONS

FRAME MATERIAL: Pine - Pressure Treated

FRAME FINISH: Two layers of white acrylic lacquer

GLAZING: G31 - Low-E tempered over laminated - double-pane glazing unit with warm TGI spacer and Argon gas

GASKETS SYSTEM: Three rubber gaskets

WARRANTY: 10 years for skylights
20 years for laminated glass against hail (restrictions apply)

SUBMITTAL/TECHNICAL DATA SHEET



SKU: **BA-FX-R**

FIXED SKYLIGHT FX REPLACEMENT LINE



DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

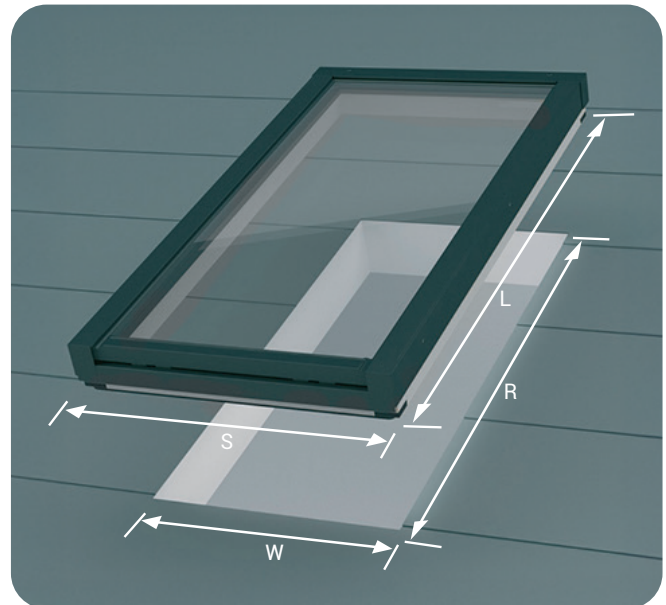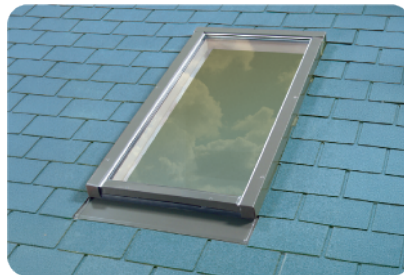

For more details see the second page

ADDITIONAL PRODUCTS TO BE USED:

External accessories	- SMZ solar awning blind	Flashings	- EH - for roof tiles, corrugated metal and standing seam - EL - for shingles and shakes
Included mounting accessories	- Bit PZ2 50mm length - Bit PZ3 50 mm length - Nail 2,5x25 - Base pin - Countersunk head screws	Internal accessories	- SRF blackout blind, SRP light reducing blind

For a complete list of options visit
www.BestAccessDoors.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-FX-R

FIXED SKYLIGHT FX REPLACEMENT LINE

DIMENSIONS:

Size												
		106R 14½ x 45¾	301R 21 x 26¾	304R 21 x 37¾	306R 21 x 45¾	308R 21 x 54 ⁷ / ₁₆	312R 21 x 70¼	504R 30 ¹ / ₁₆ x 37¾	506R 30 ¹ / ₁₆ x 45¾	508R 30 ¹ / ₁₆ x 54 ⁷ / ₁₆	801R 44¼ x 26¾	806R 44¼ x 45¾
Rough opening (WxR)	in.	14½ x 45¾	21 x 26¾	21 x 37¾	21 x 45¾	21 x 54 ⁷ / ₁₆	21 x 70¼	30 ¹ / ₁₆ x 37¾	30 ¹ / ₁₆ x 45¾	30 ¹ / ₁₆ x 54 ⁷ / ₁₆	44¼ x 26¾	44¼ x 45¾
Outside frame (SxL)	in.	16 ⁷ / ₈ x 46 ⁷ / ₈	23 ¹ / ₈ x 28	23 ¹ / ₈ x 39	23 ¹ / ₈ x 46 ⁷ / ₈	23 ¹ / ₈ x 55½	23 ¹ / ₈ x 71¾	32 ¹ / ₈ x 39	32 ¹ / ₈ x 46 ⁷ / ₈	32 ¹ / ₈ x 55½	46¼ x 28	46¼ x 46 ⁷ / ₈
Daylight area (Glass)	sq. ft.	3.47	2.92	4.31	5.30	6.39	8.39	6.46	7.94	9.58	6.67	12.09
Finished opening (PxQ)	m2	13 ⁷ / ₃₂ x 44¼	19½ x 25 ¹¹ / ₃₂	19½ x 36¾	19½ x 44¼	19½ x 52 ²⁹ / ₃₂	19½ x 68¾	28 ¹⁷ / ₃₂ x 36¾	28 ¹⁷ / ₃₂ x 44¼	28 ¹⁷ / ₃₂ x 52 ²⁹ / ₃₂	42 ²³ / ₃₂ x 25 ¹¹ / ₃₂	42 ²³ / ₃₂ x 44¼

TECHNICAL PARAMETERS:

Technical parameters	Glazing unit type		
	Unit	G31*	Rating
U-factor	[BTU/h ft²F]	0.39	NFRC 100
Ug for glazing unit	[BTU/h ft²F]	0.19	EN 1279-5 +A2:2010
Solar Heat Gain Coefficient	-	0.21	NFRC 200
Air Leakage	[cfm/ft²] @ 1.57 psf, tested size 24x70	0.025	NFRC 400
Visible Transmittance	-	0.39	NFRC 200
UV protection	-	99.8	EN 1279-5 +A2:2010
Condensation Resistance	-	60	NFRC 500
Water Penetration Resistance Test Pressure	[Pa]	730	NAFS-08 & NAFS-11
Wind load resistance	Class C1/B1		EN 14351-1:2006+A1:2010
Impact resistance	Class 3 – 450 mm		

*Note: Glazing suitable for installation up to 3,000 ft above sea level.

