



Quality Access Doors - FAST!

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTIONS

Newly developed curb mounted fixed skylight, incorporates simplicity of installation, long trouble-free use with the beauty of a sleek, modern design. Following world design trends of electronic devices, FAKRO has developed curb mounted residential skylight with completely (smartphone like) flat surface, allowing installation on any type of roof in any direction you wish.

FEATURES

- Suitable for roof pitches between 0-60 degrees
- Unique "infinity glass" design
- Low-emission and heat-reflecting double glazed glass
- Warm spacer increases condensation resistance
- White PVC frame allows installation of internal blinds
- Internal gasket system protects from condensation
- Range of internal and external accessories
- 360° turn-around installation

SPECIFICATIONS

FRAME STRUCTURE: Multi-chamber white PVC profile

FRAME FINISH: White PVC profiles from the inside and black from the outside

GLAZING: G33 - Low-E tempered over laminated - double-pane glazing unit with warm TGI spacer and Argon gas

GASKET SYSTEM: Two rubber gaskets

WARRANTY: 10 years for skylight and glazing

SKU: **BA-FXC-L**

CURB MOUNTED SKYLIGHT




DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

ADDITIONAL PRODUCTS TO BE USED:

| | |
|-------------------------------|---|
| Flashings | EH-C - for roof tiles, corrugated metal and standing seam EL-C - for shingles and shakes |
| Ice and Water Guard | - Fakro Euroband or similar self-adhesive underlayment |
| Included mounting accessories | - Bit torx t20 - Installation screws #10 x 2 in. |
| External accessories | - SMZ solar awning blind |
| Internal accessories | - SRF blackout blind, SRP light reducing blind |

For more details see the second page

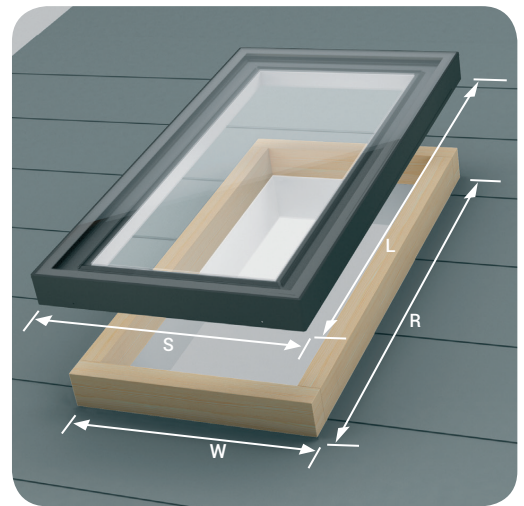

For a complete list of options visit www.BestAccessDoors.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

| PROJECT NAME : | QTY | W | H | OPTIONS |
|------------------------|--|---|---|---------|
| ARCHITECT : | | | | |
| DEALER : | | | | |
| CONTRACTOR : | | | | |
| LOCATION : | SPECIAL INSTRUCTIONS : | | | |
| DATE : | SUBMITTAL APPROVAL : (signature or stamp) | | | |
| TAGGING INSTRUCTIONS : | | | | |

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-FXC-L CURB MOUNTED FIXED SKYLIGHT

DIMENSIONS:

| Size | | 14/30 | 14/46 | 22/22 | 22/30 | 22/34 | 22/46 | 22/70 | 30/30 | 30/46 | 34/34 | 34/46 | 46/46 |
|-------------------------------|---------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| Outside curb dimensions (WxR) | in. | 17½ x 33½ | 17½ x 49½ | 25½ x 25½ | 25½ x 33½ | 25½ x 37½ | 25½ x 49½ | 25½ x 73½ | 33½ x 33½ | 33½ x 49½ | 37½ x 37½ | 37½ x 49½ | 49½ x 49½ |
| Inside curb dimensions (BxK) | in. | 14½ x 30½ | 14½ x 46½ | 22½ x 22½ | 22½ x 30½ | 22½ x 34½ | 22½ x 46½ | 22½ x 70½ | 30½ x 30½ | 30½ x 46½ | 34½ x 34½ | 34½ x 46½ | 46½ x 46½ |
| Outside frame (SxL) | in. | 19¼ x 35¼ | 19¼ x 51¼ | 27¼ x 27¼ | 27¼ x 35¼ | 27¼ x 39½ | 27¼ x 51¼ | 27¼ x 75 | 35¼ x 35¼ | 35¼ x 51¼ | 39⅝ x 39⅝ | 39⅝ x 51¼ | 51¼ x 51¼ |
| Daylight area (glass) | sq. ft. | 3.12 | 4.63 | 2.45 | 3.49 | 4.01 | 5.58 | 8.71 | 4.98 | 7.95 | 6.57 | 9.13 | 10.70 |
| | in. | 0.29 | 0.43 | 0.23 | 0.32 | 0.37 | 0.52 | 0.81 | 0.46 | 0.74 | 0.61 | 0.85 | 1.18 |

TECHNICAL PARAMETERS:

| Technical parameters | Glazing unit type | | |
|--|---|------|-------------------------|
| | Unit | G33 | Rating |
| U-factor | [BTU/h ft²F] | 0.45 | NFRC 100 |
| Solar Heat Gain Coefficient | - | 0.22 | NFRC 200 |
| Air Leakage | [cfm/ft²] @ 1,57 psf, tested size 24x70 | 0.06 | NFRC 400 |
| Visible Transmittance | - | 0.42 | NFRC 200 |
| UV protection | - | 99.7 | EN 410-2011 |
| Condensation Resistance | - | 62 | NFRC 500 |
| Water Penetration Resistance Test Pressure | [Pa] | 720 | (NAFS 2011) & A440S1-17 |

*for windows wider or longer than 55"

