



Quality Access Doors- **FAST!**

STANDARD OPTIONS

MATERIAL:

Lightweight fiberglass-reinforced gypsum

HINGE:

No hinge. Gravity based closure and removable door.

LOCK / LATCH: None

FINISH:

Rounded corners (radius finish). To be primed and painted on site.

OLD SIZES AVAILABLE:

Non-stocked doors manufactured in 15 business days.

PACKAGING:

- Individually wrapped
- 4 doors per box
- Pre assembled

FEATURES

- Square corners
- Hinges
- Cylinder or screwdriver latch or round door
- Gasketing (neoprene gasket)

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-GFRG-PUR**


GLASS FIBER REINFORCED GYPSUM ACCESS DOOR PUSH UP RADIUS CORNERS

FOR DRYWALL CEILING ONLY



■ INSTALLATION

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

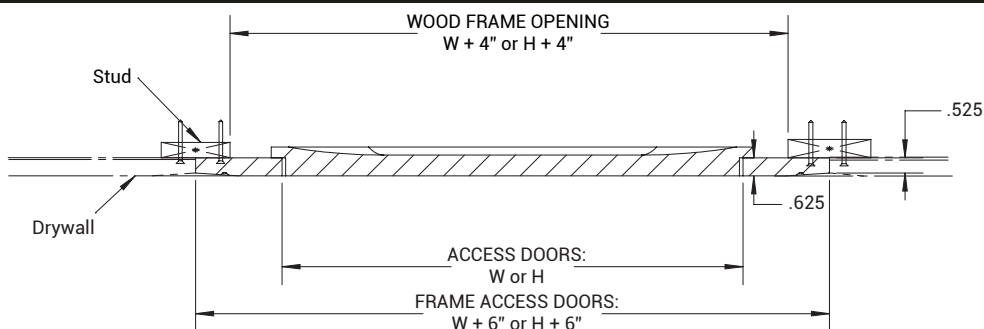


■ DIMENSIONS AND APPEARANCE

STANDARD SIZES:

DOOR SIZE W x H INCHES (MM)	WEIGHT LBS	KG
9 x 9 (229 x 229)	6.00	2.72
12 x 12 (304 x 304)	8.00	3.63
16 x 16 (406 x 406)	10.0	4.54
18 x 18 (457 x 457)	11.0	4.99
24 x 24 (609 x 609)	16.0	7.26

Rough wall opening = door size + 6"

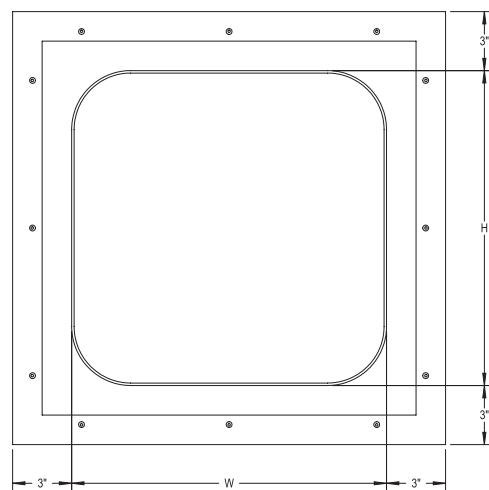

■ PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

For a complete list of options visit
www.BestAccessDoors.com

Scan or Click



To view Pricing and
Additional Product Info.

**LEED READY: THIS PRODUCT
CONTRIBUTES TO LEED® CREDITS**



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com