



Quality Access Doors- **FAST!**

APPLICATION

Glass fiber reinforced gypsum, ceiling access doors are designed to blend seamlessly into drywall ceilings. The hinged feature allows this door to be installed in walls.

FEATURES

- European Angle Hinges
- Tapered edge for joint tape
- Easily textured
- Lightweight
- No cracking or shrinkage
- Mold and moisture resistant

SPECIFICATIONS

- Shell Thickness = .125" .375"
- Fastener Test Pull Out (wood stud) = 525 lb. avg.
- Fastener Test Pull Out (metal stud) = 525 lb. avg.
- Fastener Push Through Test = 350 lb. avg.
- Fuel Contribution (ASTM-E84-80) = 0
- Flame Spread (ASTM-E84-80) = 0
- Smoke Index (ASTM-E84-80) = 0
- Combustion (ASTM-E84-80) = 0

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-GRG-HG-RC**

GLASS FIBER REINFORCED GYPSUM RADIUS CORNER

HINGED




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

DOOR SIZE W x H INCHES (MM)	CEILING OPENING INCHES (MM)	WEIGHT	
		LBS	KG
9 x 9 (229 x 229)	15 x 15 (381 x 381)	8.4	3.80
12 x 12 (305 x 305)	18 x 18 (457 x 457)	11.2	5.10
16 x 16 (406 x 406)	22 x 22 (559 x 559)	12.0	5.40
18 x 18 (457 x 457)	24 x 24 (610 x 610)	16.6	7.50
24 x 24 (610 x 610)	30 x 30 (762 x 762)	22.7	10.3

For detailed specifications see submittal sheet

MANUFACTURED BY ACUDOR

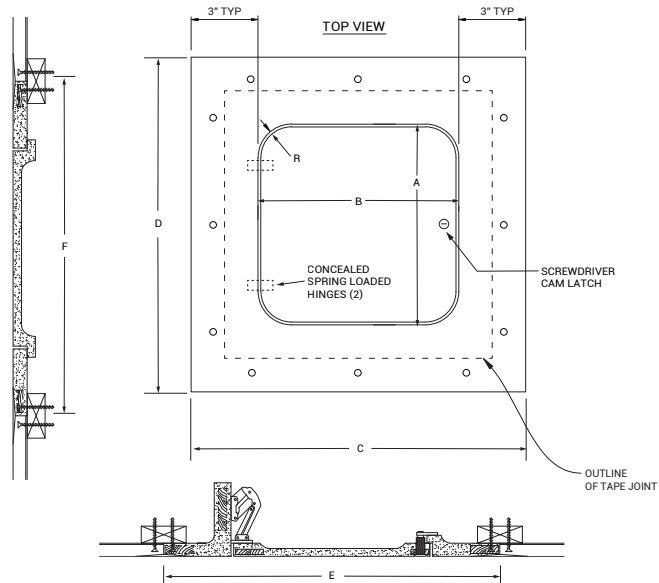

For a complete list of options visit
www.BestAccessDoors.com

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com