



Quality Access Doors- **FAST!**

SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

Glass fiber reinforced gypsum, ceiling access doors are designed to blend seamlessly into drywall ceilings. The hinged feature allows this door to be installed in walls.

FEATURES

- European Angle Hinges
- Tapered edge for joint tape
- Easily textured
- Lightweight
- No cracking or shrinkage
- Mold and moisture resistant

SPECIFICATIONS

- Shell Thickness = .125" .375"
- Fastener Test Pull Out (wood stud) = 525 lb. avg.
- Fastener Test Pull Out (metal stud) = 525 lb. avg.
- Fastener Push Through Test = 350 lb. avg.
- Fuel Contribution (ASTM-E84-80) = 0
- Flame Spread (ASTM-E84-80) = 0
- Smoke Index (ASTM-E84-80) = 0
- Combustion (ASTM-E84-80) = 0

SKU: **BA-GRG-HG-SC**

GLASS FIBER REINFORCED GYPSUM SQUARE CORNER

HINGED




DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

DOOR SIZE W x H INCHES (MM)	CEILING OPENING INCHES (MM)	WEIGHT	
		LBS	KG
9 x 9 (229 x 229)	15 x 15 (381 x 381)	8.40	3.80
12 x 12 (305 x 305)	18 x 18 (457 x 457)	11.2	5.10
16 x 16 (406 x 406)	22 x 22 (559 x 559)	12.0	5.40
18 x 18 (457 x 457)	24 x 24 (610 x 610)	16.6	7.50
24 x 24 (610 x 610)	30 x 30 (762 x 762)	22.7	10.3

For detailed specifications see submittal sheet

MANUFACTURED BY ACUDOR

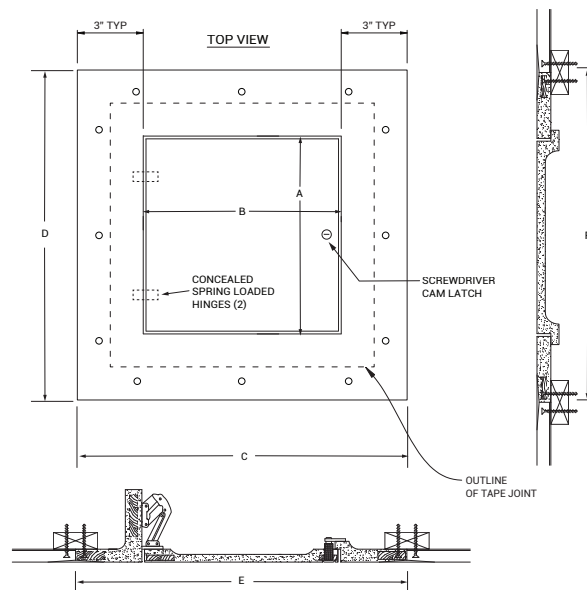

For a complete list of options visit
www.BestAccessDoors.com

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan or Click



To view Pricing and
Additional Product Info.

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com