



SUBMITTAL/TECHNICAL DATA SHEET

APPLICATION

Glass fiber reinforced gypsum, ceiling access doors are designed to blend seamlessly into drywall ceilings

FEATURES

- Tapered edge for joint tape
- Easily textured
- Lightweight
- No cracking or shrinkage
- Mold and moisture resistant

SPECIFICATIONS

- Shell Thickness = .125" .375"
- Fastener Test Pull Out (wood stud) = 525 lb. avg.
- Fastener Test Pull Out (metal stud) = 525 lb. avg.
- Fastener Push Through Test = 350 lb. avg.
- Fuel Contribution (ASTM-E84-80) = 0
- Flame Spread (ASTM-E84-80) = 0
- Smoke Index (ASTM-E84-80) = 0
- Combustion (ASTM-E84-80) = 0

For a complete list of options visit
www.BestAccessDoors.com

SKU: **BA-GRG-RND**

GLASS FIBER REINFORCED GYPSUM ROUND PANEL




DIMENSIONS AND APPEARANCE



>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

DOOR SIZE Inc. (mm)	CEILING OPENING Inc. (mm)	WEIGHT LBS KG
Ø9 (229)	15 x 15 (381 x 381)	6.00 2.73
Ø12 (305)	18 x 18 (457 x 457)	9.00 4.09
Ø16 (406)	22 x 22 (559 x 559)	10.0 4.53
Ø18 (457)	24 x 24 (610 x 610)	11.0 5.00
Ø24 (610)	30 x 30 (762 x 762)	16.0 7.27

For detailed specifications see submittal sheet

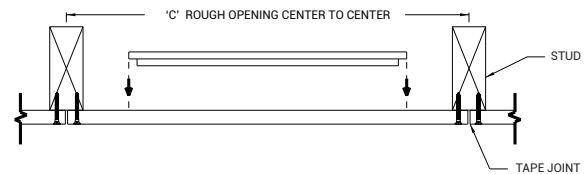

MANUFACTURED BY ACUDOR

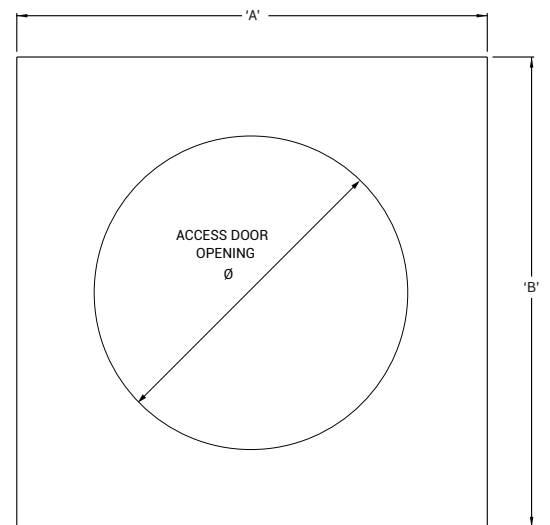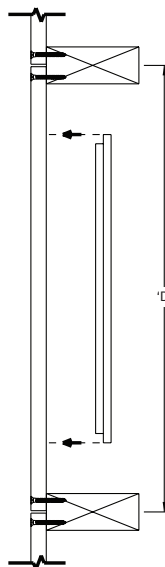

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan  or  Click



To view Pricing and
Additional Product Info.

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-GRG-RND ROUND POP-OUT ACCESS PANEL

NOMINAL DOOR SIZE	A	B	C	D
9" Diameter (406)	15.00 (381)	15.00 (381)	15.00 (381)	15.00 (381)
12" Diameter (457)	18.00 (457)	18.00 (457)	18.00 (457)	18.00 (457)
16" Diameter (610)	22.00 (559)	22.00 (559)	22.00 (559)	22.00 (559)
18" Diameter (559)	24.00 (609)	24.00 (609)	24.00 (609)	24.00 (609)
24" Diameter (762)	30.00 (762)	30.00 (762)	30.00 (762)	30.00 (762)

