



Quality Access Doors- **FAST!**

SUBMITTAL/TECHNICAL DATA SHEET

SPECIFICATION

DOOR AND TRIM: 10 ga. steel.

FRAME: 2" x 2" x 3/16" angle.

HINGE: Heavy duty detention hinges welded to surround and door.

ANCHORS: Heavy steel, welded to frame.

LOCK: Prepped for Detention lock.

FINISH: Rust inhibitive prime finish grey.

SKU: **BA-HS**

HIGH SECURITY ACCESS DOOR




DIMENSIONS AND APPEARANCE


>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

STANDARD SIZES:

DOOR SIZE W X H	WALL OPENING	HEAVY DUTY DETENTION HINGES	SHIP WT. LBS.
12 X 12	12 1/2 X 12 1/2	1	4
16 X 16	16 1/2 X 16 1/2	1	6
18 X 18	18 1/2 X 18 1/2	1	7
24 X 24	24 1/2 X 24 1/2	1	9
24 X 36	24 1/2 X 36 1/2	1	12
36 X 36	36 1/2 X 36 1/2	2	16

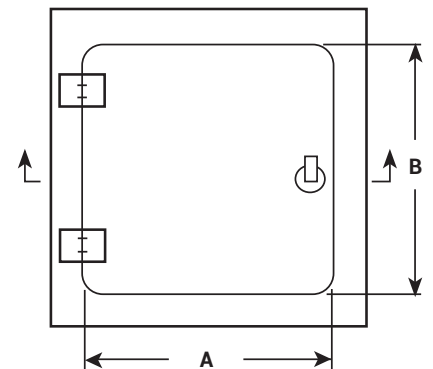

ELEVATION

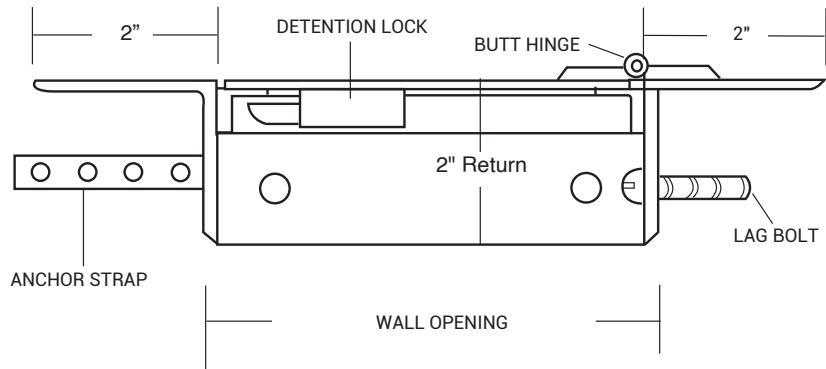

SECTION DETAIL

For a complete list of options visit
www.BestAccessDoors.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com