




Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-IG-CA24**

FLUSH PERMANENT COLD AIR RETURN COVER

24" X 6" INVISAGRILLE

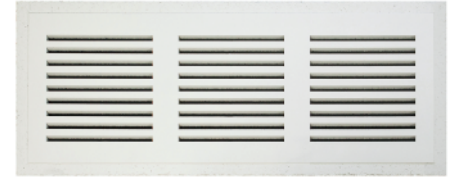

DESCRIPTION

A premium flush mount cold air return cover which replaces the cover for a 24"x6" opening. This cover fits into the drywall opening of 24.25"x10.25" and has a vented/slotted area of 20.5"x6".

APPLICATION

- Designed for 1/2" for a permanent installation.
- Suitable for low and high wall installations.
- Screws directly to your wall studs to allow it to be flush.
- Finish taping and seaming the perimeter edge with your drywall.
- (PRO TIP: cover the slots with painters tape to avoid drywall compound getting in them).
- Prime your wall and paint it to your wall colour.
- The cold air comes primed white and ready for your paint colour.

FEATURES

- Triple fibre reinforced cement board grill.
- Easy installation, primed and ready to paint.
- Machined outer edge to allow for screws, tape and drywall compound.
- 20 degree angled vent slots for directional venting.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.


SPECIFICATIONS

- Over 51 square inches (329 square centimeters) of open area.
- Slot Size: 5.91" x 0.32" (150mm x 8mm).
- 27 angled horizontal slots.
- Slot Angle - 20 degrees
- Overall dimensions are 24" x 10" x 0.5" (609mm x 254mm x 12mm).
- Product weight is 3.75 pounds (1.7 kilograms)

DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

CUT YOUR DRYWALL OPENING TO 32.25" x 10.25 TO FIT THE PRODUCT INSIDE.

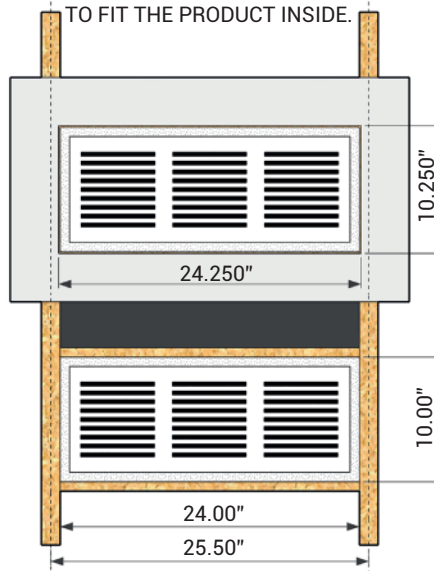

Material Information:

Raw Material: cement, fibres, quartz sand, non-hazardous fillers
 Density: $1.0 < D \leq 1.2 \text{ g/cm}^3$
 Asbestos Content: 100% asbestos-free
 Fire resistance: non-combustible
 Water Absorption: $\leq 40\%$
 Resistant Bending Strength: $\leq 10.5 \text{ MPa dry}$
 Moisture Movement: 0.25 %
 Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing

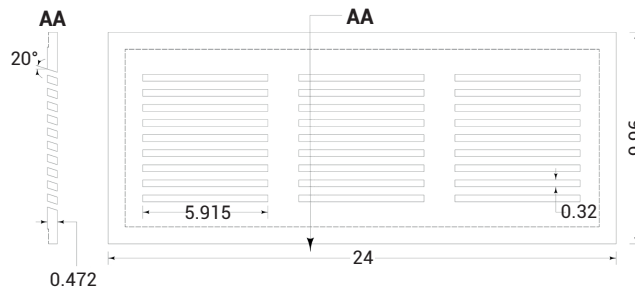

For a complete list of options visit www.BestAccessDoors.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-IG-CA24 24" X 6" INVISAGRILLE FLUSH PERMANENT COLD AIR RETURN COVER

AIRFLOW DATA

			Core Velocity (FPM)	300	400	500	600	700	800	1000	1200	1400
Opening Width (in.)	Opening Height (in.)	Core Area (ft ²)	Core Velocity Pressure ("wc)	0.006	0.010	0.016	0.022	0.030	0.040	0.062	0.090	0.122
20.5	6	0.854	Flow (CFM)	174	232	290	348	406	464	581	697	813
			Static Pressure ("wc)	0.025	0.044	0.068	0.098	0.134	0.175	0.273	0.393	0.535

CUT YOUR DRYWALL OPENING TO 32.25" x 10.25" TO FIT THE PRODUCT INSIDE.

