




Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-IG-MAG-C24**

FLUSH REMOVABLE COLD AIR RETURN COVER

24" X 8" INVISAGRILLE

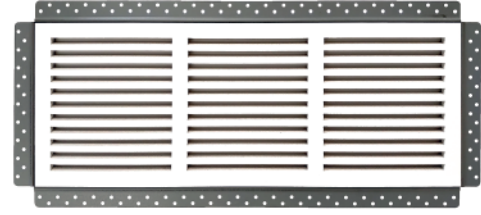

DESCRIPTION

A premium flush mount cold air return cover which replaces the cover for a 24"x8" opening. This cover fits into the drywall opening of 26.25"x10.25" and has a vented/slotted area of 24"x8".

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for low and high wall installations.
- Not suitable for ceiling install (call for ceiling option).
- Rough-in's available for new builds and major renovations.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- 20 degree angled vent slots for directional venting.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous manufacturing and Non-Hazardous.


SPECIFICATIONS

- Over 77.8 square inches (502 square centimeters) of open area.
- Slot Size: 0.32" x 7.375" (8mm x 187mm).
- 33 angled horizontal slots.
- Slot Angle - 20 degrees
- Overall dimensions are 28.5" x 12.50" x 0.5" (724mm x 317mm x 12mm).
- Product weight is 3.7 pounds (1.67 kilograms)

DIMENSIONS AND APPEARANCE


>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

CUT YOUR DRYWALL OPENING TO 26.25" X 10.25" TO FIT THE FRAME INSIDE.

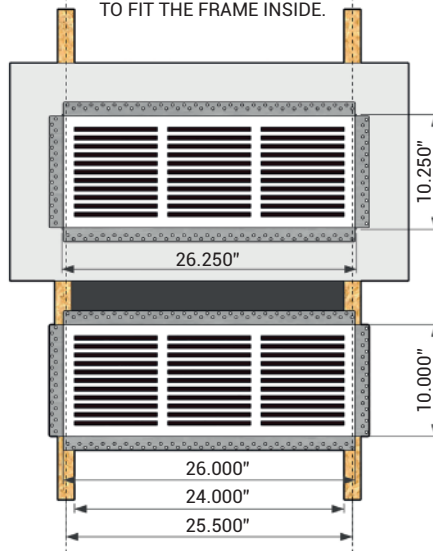

MATERIAL INFORMATION:

Raw Material: cement, fibres, quartz sand, non-hazardous fillers.
 Density: 1.0 < D ≤ 1.2 g/cm³
 Asbestos Content: 100% asbestos-free
 Fire resistance: non-combustible
 Water Absorption: ≤ 40%
 Resistant Bending Strength: ≤ 10.5 MPa dry
 Moisture Movement: 0.25 %
 Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing .

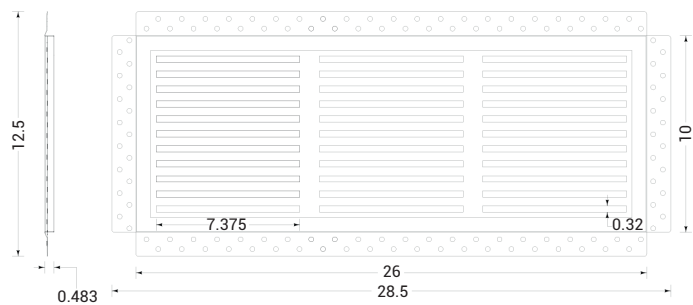

For a complete list of options visit www.BestAccessDoors.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



| PROJECT NAME : | QTY | W | H | OPTIONS |
|------------------------|--|---|---|---------|
| ARCHITECT : | | | | |
| DEALER : | | | | |
| CONTRACTOR : | | | | |
| LOCATION : | SPECIAL INSTRUCTIONS : | | | |
| DATE : | SUBMITTAL APPROVAL : (signature or stamp) | | | |
| TAGGING INSTRUCTIONS : | | | | |

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

To view Pricing and Additional Product Info.

**BA-IG-
MAG-C24**

**24" X 8" INVISAGRILLE FLUSH
REMOVABLE COLD AIR RETURN COVER**

AIRFLOW DATA

| | | | Core Velocity (FPM) | 300 | 400 | 500 | 600 | 700 | 800 | 1000 | 1200 | 1400 |
|---------------------|----------------------|------------------------------|------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Opening Width (in.) | Opening Height (in.) | Core Area (ft ²) | Core Velocity Pressure ("wc) | 0.006 | 0.010 | 0.016 | 0.022 | 0.030 | 0.040 | 0.062 | 0.090 | 0.122 |
| 24 | 8 | 1.333 | Flow (CFM) | 267 | 356 | 445 | 534 | 623 | 712 | 890 | 1068 | 1246 |
| | | | Static Pressure ("wc) | 0.027 | 0.048 | 0.075 | 0.108 | 0.147 | 0.192 | 0.300 | 0.432 | 0.588 |

CUT YOUR DRYWALL OPENING TO 26.25" X 10.25" TO FIT THE FRAME INSIDE.

