



Quality Access Doors- **FAST!**

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTION

A premium flush mount supply vent cover for a W x H duct. Complete with diffuser flaps to control your air flow, this cover fits into the drywall opening of W x H and has a vented/slotted area of W x H.

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- Rectangular straight vent slots.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.


SPECIFICATIONS

- Slot Size: 0.26" x 3" (6.6mm x 76mm).
- Overall dimensions are custom size (W x H).
- Product weight is Depend on Custom Size.


SKU: **BA-IG-MAG-S-CUSTOM**

REMOVABLE WALL AND CEILING SUPPLY VENT

CUSTOM SIZE W X H INVISAGRILLE

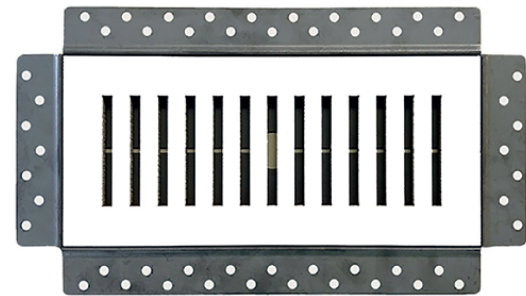


DIMENSIONS AND APPEARANCE

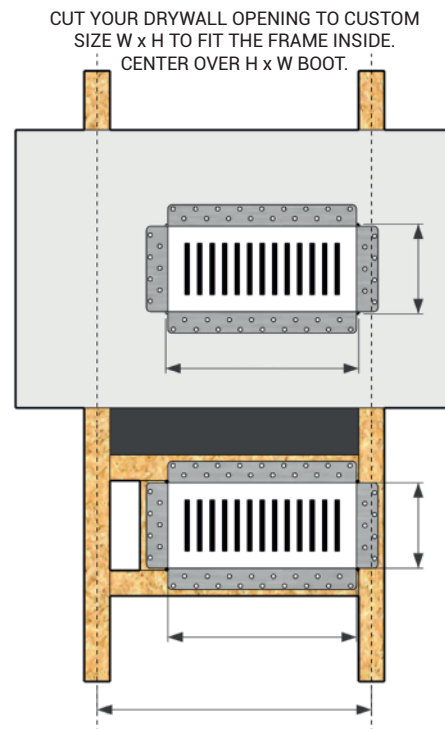

MATERIAL INFORMATION:

Raw Material: cement, fibres, quartz sand, non-hazardous fillers.
Density: $1.0 < D \leq 1.2 \text{ g/cm}^3$
Asbestos Content: 100% asbestos-free
Fire resistance: non-combustible
Water Absorption: $\leq 40\%$
Resistant Bending Strength: $\leq 10.5 \text{ MPa dry}$
Moisture Movement: 0.25 %
Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing.

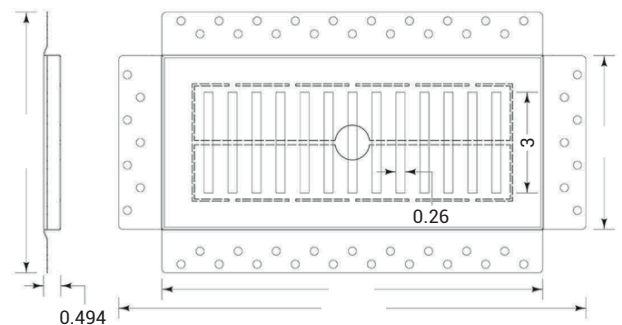

For a complete list of options visit
www.BestAccessDoors.com

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com