




Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-IG-MAG-S4X12**

REMOVABLE WALL AND CEILING SUPPLY VENT

4" X 12" INVISAGRILLE

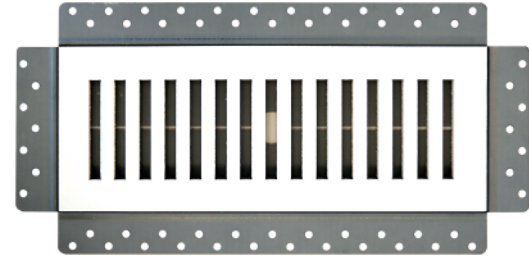

DESCRIPTION

A premium flush mount supply vent cover for a 4"x12" duct. Complete with diffuser flaps to control your air flow, this cover fits into the drywall opening of 5"x13" and has a vented/slotted area of 3"x11".

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250" diametre x 0.060" thick).
- Easy installation, primed and ready to paint.
- Rectangular straight vent slots.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.


SPECIFICATIONS

- Over 12.4 square inches (80.5 square centimeters) of open area.
- Slot Size: 0.26" x 3" (6.6mm x 76.2mm).
- 16 rectangular straight vertical slots.
- Overall dimensions are 15.5" x 7.5" x 0.5" (393.7mm x 190.5mm x 12mm).
- Product weight is 1.25 pounds (0.55 kilograms)

DIMENSIONS AND APPEARANCE


>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

CUT YOUR DRYWALL OPENING TO 13.25" X 5.25" TO FIT THE FRAME INSIDE. CENTER OVER 4x12 BOOT.

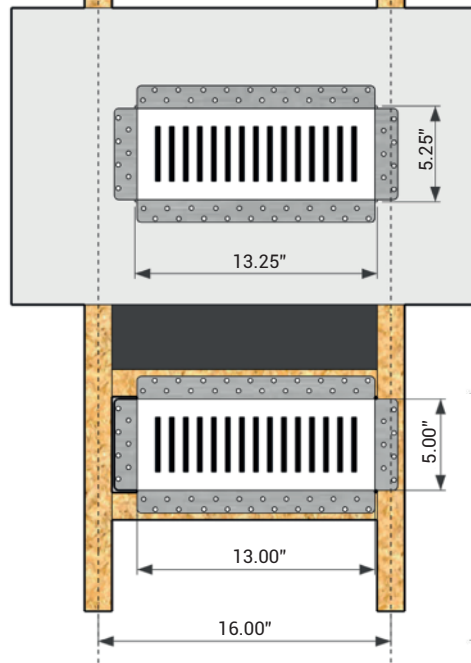

MATERIAL INFORMATION:

Raw Material: cement, fibres, quartz sand, non-hazardous fillers.
 Density: 1.0 < D ≤ 1.2 g/cm³
 Asbestos Content: 100% asbestos-free
 Fire resistance: non-combustible
 Water Absorption: ≤40%
 Resistant Bending Strength: ≤10.5 MPa dry
 Moisture Movement: 0.25 %
 Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing .

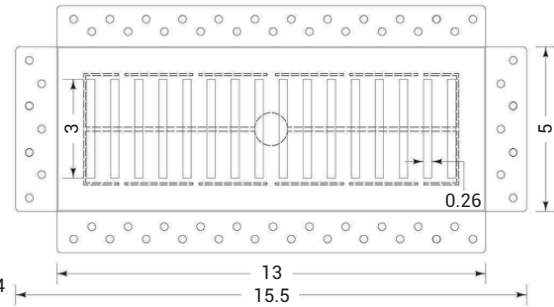

For a complete list of options visit www.BestAccessDoors.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



To view Pricing and Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com

E-MAIL:
info@bestaccessdoors.com

BA-IG-MAG-S4X12 4" X 12" INVISAGRILLE REMOVABLE WALL AND CEILING SUPPLY VENT

AIRFLOW DATA

			Core Velocity (FPM)		300	400	500	600	700	800	1000	1200	1400
Opening Width (in.)	Opening Height (in.)	Core Area (ft ²)	Core Velocity Pressure ("wc)		0.006	0.010	0.016	0.022	0.030	0.040	0.062	0.090	0.122
11	3	0.2292	Flow (CFM)		45	60	75	90	105	120	150	180	210
			Static Pressure ("wc)		0.014	0.024	0.038	0.054	0.074	0.096	0.150	0.217	0.295
			Throw (ft) (150 100 50)		3 5 11	5 7 15	6 9 19	7 11 23	8 13 27	10 15 32	19 40	15 23 49	18 27 57

CUT YOUR DRYWALL OPENING TO 13.25" X 5.25"
TO FIT THE FRAME INSIDE.
CENTER OVER 4x12 BOOT.

