

InvisaHatch Drywall Inlay with Fully Detachable Hatch

Aluminum frame, with drywall inlay, for ceilings, drywall, and various applications

NEW



Ready-to-paint door leaf

Description

The access panel consists of a welded aluminum frame and is available with 1/2" (12.7 mm) or 5/8" (15.9 mm) inlayed drywall and two latches.


Both an outer and an inner frame assembly consists of high grade aluminum which is bonded with a special welding process.

For sizes 12" x 12" (305 mm x 305 mm) and up the access panels are equipped with a safety-system to prevent accidental opening. This safety system must be reattached if the hatch is removed.



A reveal of just 1/16" (1,59 mm) is all that is visible of the access panel that blends into a wall or ceiling.

The concealed snap locks open the access panel when pressure is applied to the spring loaded latch side.

The panel door is equipped with a perimeter seal.

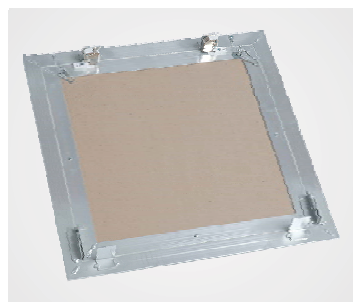

Fully detachable hatch

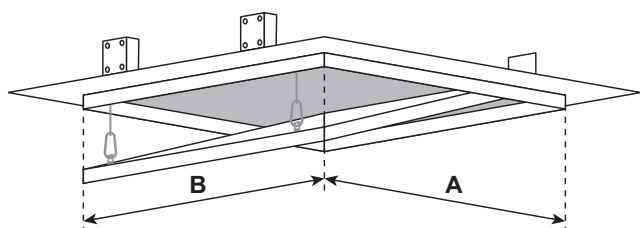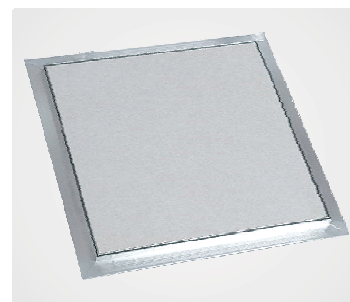

Customized solutions

Customized sizes can be produced in every dimension upon request.

Drywall insert with screws on larger sizes than 24" x 24" (610 mm x 610 mm).

BA-IVH	Dimensions	
	A inch mm	B inch mm
Code		
BA-IVH-8-8	8" 203	8" 203
BA-IVH-12-12	12" 305	12" 305
BA-IVH-16-16	16" 406	16" 406
BA-IVH-20-20	20" 508	20" 508
BA-IVH-24-24	24" 610	24" 610

All standard sizes are available in 1/2" (12.7 mm) or 5/8" (15.9 mm) drywall.

Options

- SD** Screwdriver operated cam latch
- FS** Screwdriver operated four-square cam latch
- Z** Round Cylinder Lock with Key
- M** Mortise Cylinder Lock Preparation
- H** Hex Head Cam Latch
- P** Pinned Hex Head Cam Latch

Rough opening is door size + 3/8" (9 mm)

Fully
Detachable Hatch



Best Access Doors

Advantages of BestAccessDoors

- Superior engineering & innovative design
- Fast delivery
- Quick and easy installation
- Solid aluminum frame
- Flush installation in ceilings and walls
- Available in moisture / mildew resistant green board and cement board




228 Park Ave S # 76520
New York NY 10003-1502
United States
www.BestAccessDoors.com
sales@bestaccessdoors.com
Tel.: 1-800-483-0823 | Fax: 1-888-828-6021

BA-IVH

1/2"
12.7mm

OPEN HINGE, REMOVABLE DOOR FOR
5/8" (15.9MM) DRYWALL, AIR & DUST RESIS-
TANT, FOR NON-RATED WALLS AND CEILINGS.

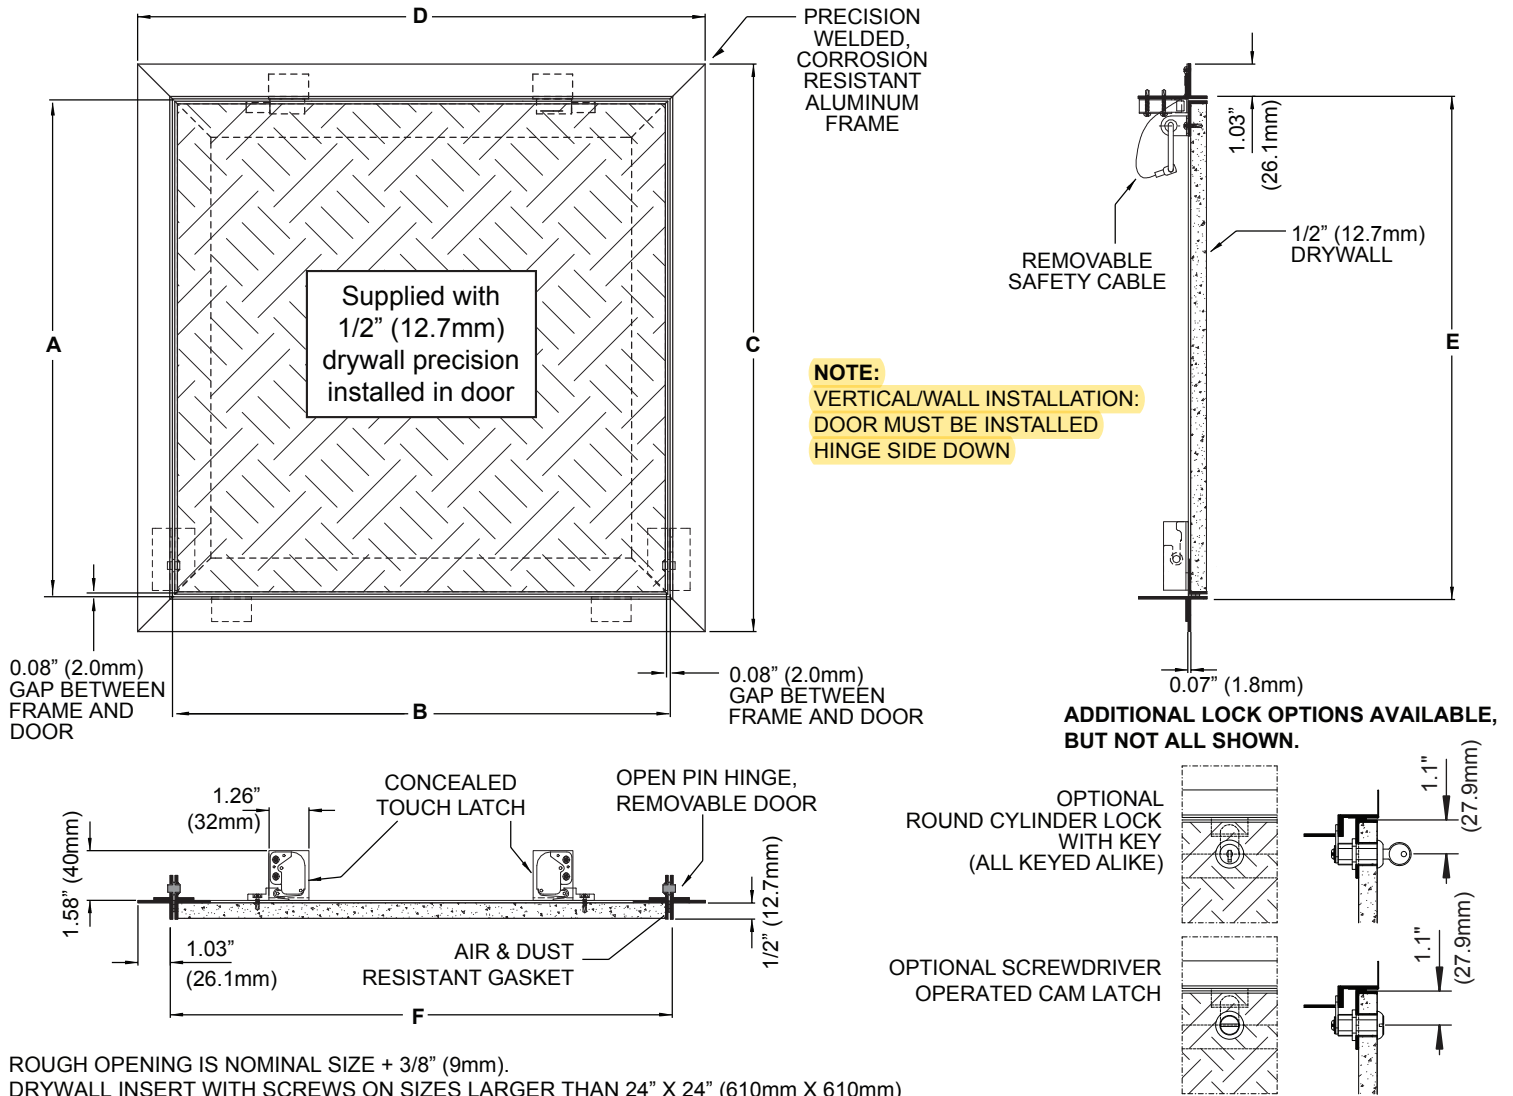

STANDARD FEATURES

CONCEALED TOUCH LATCH; OPEN HINGE, REMOVABLE DOOR; FITS 5/8" (15.9MM) DRYWALL; AIR & DUST RESISTANT GASKET; FOR NON-RATED WALLS & CEILINGS; ALUMINUM FRAME & DOOR STRUCTURE, WELDED, MILL FINISH; NON-SNAG REMOVABLE SAFETY CABLE

DOOR PANEL OPTION

☐
☐

LOCK OPTIONS

☐
☐

QTY.	NOMINAL SIZE		A		B		C		D		E		F		LATCHES
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	
	8 x 8	203 x 203	8.00	203	8.00	203	10.20	258	10.20	258	8.14	207	8.14	207	2
	12 x 12	305 x 305	12.00	305	12.00	305	14.20	359	14.20	359	12.14	308	12.14	308	2
	16 x 16	406 x 406	16.00	406	16.00	406	18.20	461	18.20	461	16.14	410	16.14	410	2
	18 x 18	457 x 457	18.00	457	18.00	457	20.20	512	20.20	512	22.14	461	22.14	461	2
	20 x 20	508 x 508	20.00	508	20.00	508	22.20	562	22.20	562	20.14	512	20.14	512	2
	24 x 24	610 x 610	24.00	610	24.00	610	26.20	664	26.20	664	24.14	613	24.14	613	2
	24 x 36	610 x 915	24.00	610	36.00	915	26.20	664	38.20	969	24.14	613	36.14	919	3

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options:

Company:

Contact:

Approval for Manufacturing/Signature:

Quantity:

Project/Job:

Title:

Quote by:

Date:




228 Park Ave S # 76520
New York NY 10003-1502
United States
www.BestAccessDoors.com
sales@bestaccessdoors.com
Tel.: 1-800-483-0823 | Fax: 1-888-828-6021

BA-IVH

5/8"
15.9mm

OPEN HINGE, REMOVABLE DOOR FOR
5/8" (15.9MM) DRYWALL, AIR & DUST RESIS-
TANT, FOR NON-RATED WALLS AND CEILINGS.

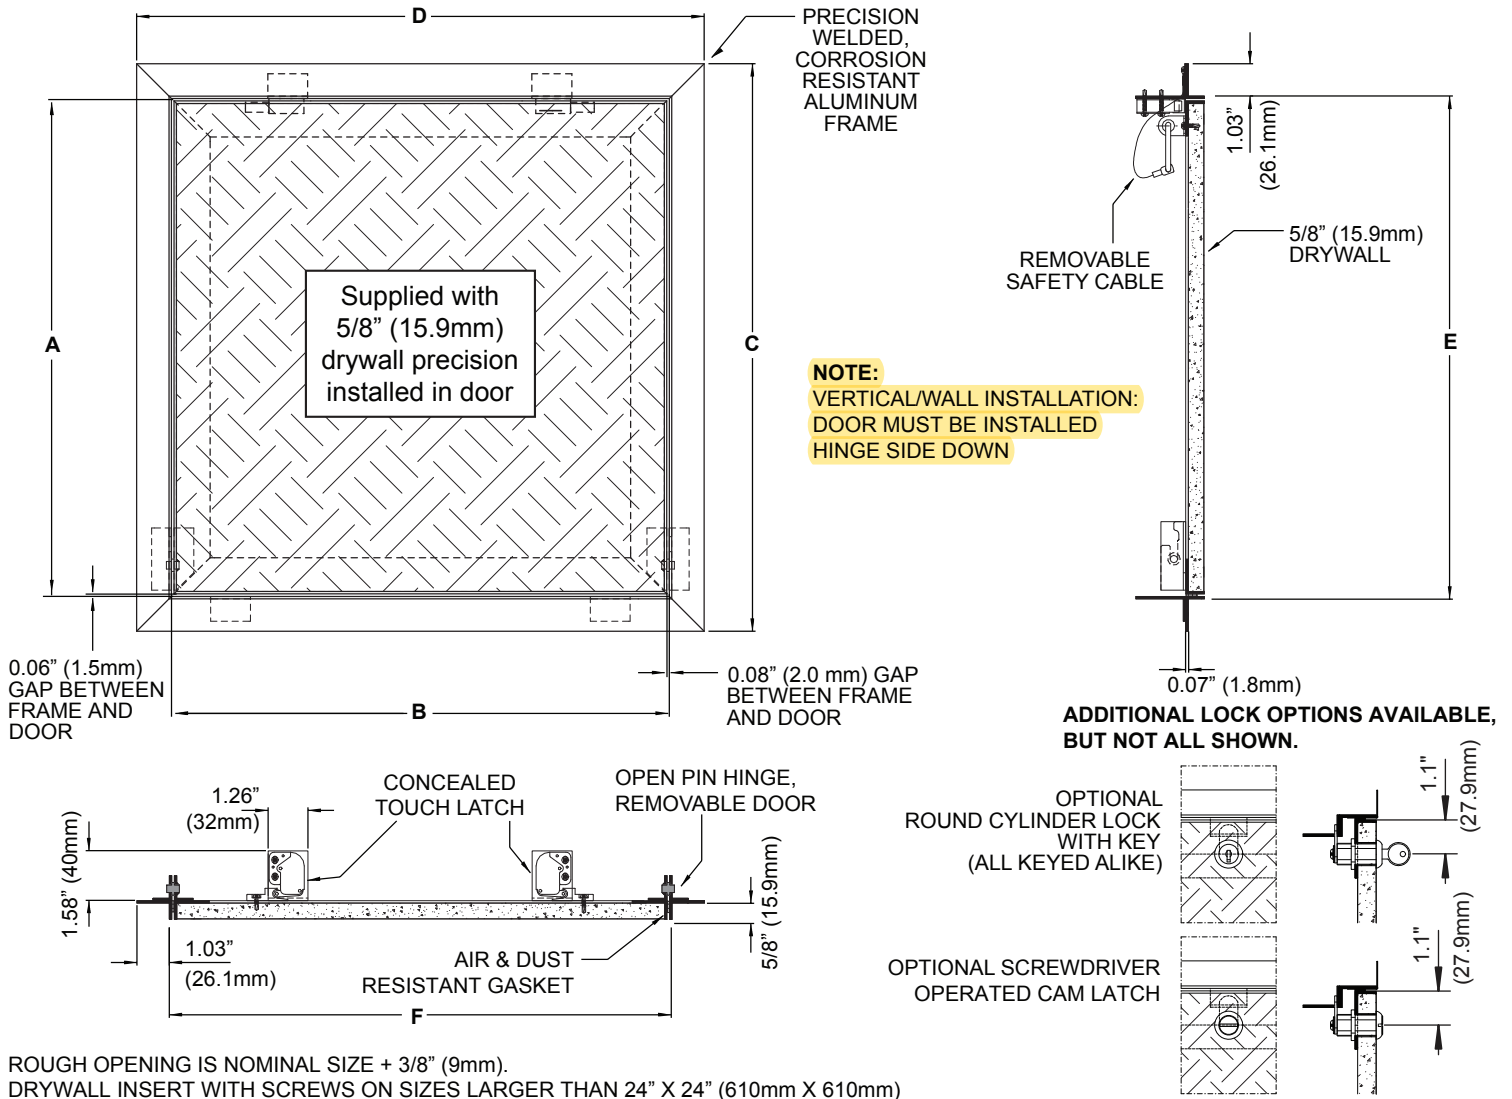

STANDARD FEATURES

CONCEALED TOUCH LATCH; OPEN HINGE, REMOVABLE DOOR; SUPPLIED TO FIT 5/8" (15.9MM) DRYWALL; AIR & DUST RESISTANT GASKET; FOR NON-RATED WALLS & CEILINGS; ALUMINUM FRAME AND DOOR STRUCTURE, WELDED, MILL FINISH; NON-SNAG REMOVABLE SAFETY CABLE

DOOR PANEL OPTION

☐
☐

LOCK OPTIONS

☐
☐

QTY.	NOMINAL SIZE Inch mm	A Inch mm	B Inch mm	C Inch mm	D Inch mm	E Inch mm	F Inch mm	LATCHES

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options:

Company:

Contact:

Approval for Manufacturing/Signature:

Quantity:

Project/Job:

Title:

Quote by:

Date: