

Quality Access Doors- FAST!

SPECIFICATIONS

- 01. Heavy duty forged stainless steel hinges with stainless steel pins
- 02. Guide arm (If req'd)
- 03. 1-1/2" Drain coupling
- 04. Standard slam lock
- 05. Automatic hold open arm with Red vinyl
- grip 06. 1/4" Steel diamond pattern plate cover
- 1/4" Steel channel frame with welded 1 1/4" x 1 1/4" anchor flange
- 08. Heavy duty check chain 09. Spring lifting mechanism

SHOP FINISH:

STEEL: Red Oxide Primer HARDWARE: Non-corrosive materials (Unless otherwise specified)

Reinforced for 300 Lbs. Per Sq. Ft. (1464 KG. Per Sq. Meter) live load

INSTALLER NOTES:

A. Use caution. Cover is spring loaded. Do not remove safety shipping bolt until unit is to be installed and in normal horizontal operating position.

- B. Be sure unit is set on slight pitch toward drain corner.
- C. Before anchoring in place open and close door. Check to see that the door in the closed position rests on the frame all around. If not, shim under the frame at the proper corner.
- D. Do not reduce 1 1/2" drain pipe to dry well or disposal system.

For a complete list of options visit www.BestAccessDoors.com

QT	Y TYPE	SIZE WIDTH X LENGTH
	JD-1	4'-0" X 2'-6" [1220mm] X [762mm]
	JD-2	4'-0" X 4'-0" [1220mm] X [1220mm]
	JD-3	4'-0" X 6'-0" [1220mm] X [1830mm]
	JD-4	5'-0" X 5'-0"

Scan or Click



To view Pricing and Additional Product Info.

SUBMITTAL/TECHNICAL DATA SHEET

SKU: BA-JD


DOUBLE LEAF ACCESS DOOR

TYPE JD - INTERIOR/EXTERIOR



■ DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

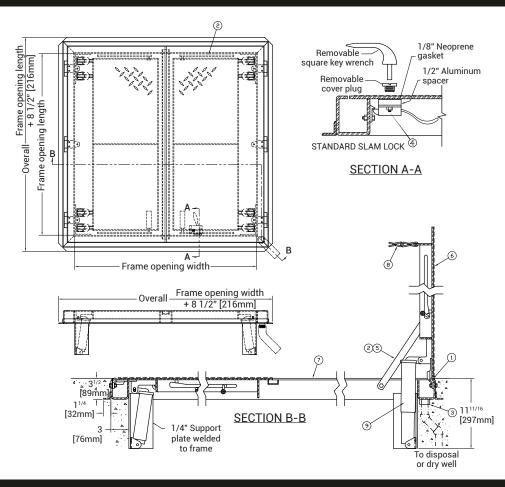

PROJECT DATA

Custom Sizes Available - Fast!

	PROJECT NAME:	QTY	W	Н	OPTIONS	
	ARCHITECT:					
50,0	DEALER:					
	CONTRACTOR:					
2	LOCATION:	SPECIAL INSTRUCTIONS:				
DATE:						
TAGGING INSTRUCTIONS:			SUBMITTAL APPROVAL : (signature or stamp)			



TELEPHONE: 1-800-483-0823

1-888-828-6021



228 PARK AVE. S. #76520 NEW YORK, NY, 10003



WEBSITE: www.BestAccessDoors.com

E-MAIL: info@bestaccessdoors.com