



Quality Access Doors- FAST!

# SUBMITTAL/TECHNICAL DATA SHEET

## SPECIFICATION

### CONSTRUCTION:

- Frame shall be 16 gauge steel.
- Door shall be 20 gauge steel, welded pan type.
- Flange shall be 16 gauge steel, 1" wide.
- Hinge shall be exposed, continuous piano hinge.
- Door shall be filled with 2" thick fire rated insulation.
- Door shall have automatic closure, be self-latching, and contain interior latch release.
- Latches shall be spring loaded sliding bolt type, keyed paddle latch, all keyed alike. Door can be prepared for a rim cylinder lock.
- Finish shall be prime coat of rust inhibitive electrostatic powder, baked enamel. Stainless steel doors shall have #4 satin finish.

SKU: **BA-KRP-150FR-SS**

## FIRE-RATED ACCESS DOOR

FOR WALLS AND CEILINGS



Standard Model

## DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

### STANDARD SIZES:


DOOR SIZE H X W (IN.)	WALL/CEILING OPENING (IN.)	NUMBER OF LATCHES	SHIP WT. (LBS.)
8 x 8	8 3/8 X 8 3/8	1	6.3
12 x 12	12 3/8 X 12 3/8	1	9.7
14 x 14	14 3/8 X 14 3/8	1	12.7
16 x 16	16 3/8 X 16 3/8	1	14.1
18 x 18	18 3/8 X 18 3/8	1	18.9
24 x 12	24 3/8 X 12 3/8	1	15.5
22 x 22	22 3/8 X 22 3/8	1	24.0
24 x 24	24 3/8 X 24 3/8	1	26.7
30 x 22	30 3/8 X 22 3/8	1	27.8

DOOR SIZE H X W (IN.)	WALL/CEILING OPENING (IN.)	NUMBER OF LATCHES	SHIP WT. (LBS.)
30 x 24	30 3/8 X 24 3/8	1	32.2
*30 x 30	30 3/8 X 30 3/8	1	37.7
*32 x 32	32 3/8 X 32 3/8	1	41.3
36 x 22	36 3/8 X 22 3/8	2	34.4
36 x 24	36 3/8 X 24 3/8	2	40.2
*36 x 36	36 3/8 X 36 3/8	2	52.0
*48 x 24	48 3/8 X 24 3/8	2	48.9
*48 x 36	48 3/8 X 36 3/8	2	62.0
*48 x 48	48 3/8 X 48 3/8	2	89.0

\* All doors with width greater than 24" are for wall installation only. They are not approved for ceiling installation.

### FIRE-RATED ACCESS DOOR INSTALL IN SHEET ROCK, MASENRY, TILE OR PLASTER

Note: For installation in 3 hour ceiling system, on sizes 16" x 16" and larger, extra spring supplied with door must be attached from back of door pan to framing of floor above in such a manner as to insure that a door is self-closing.

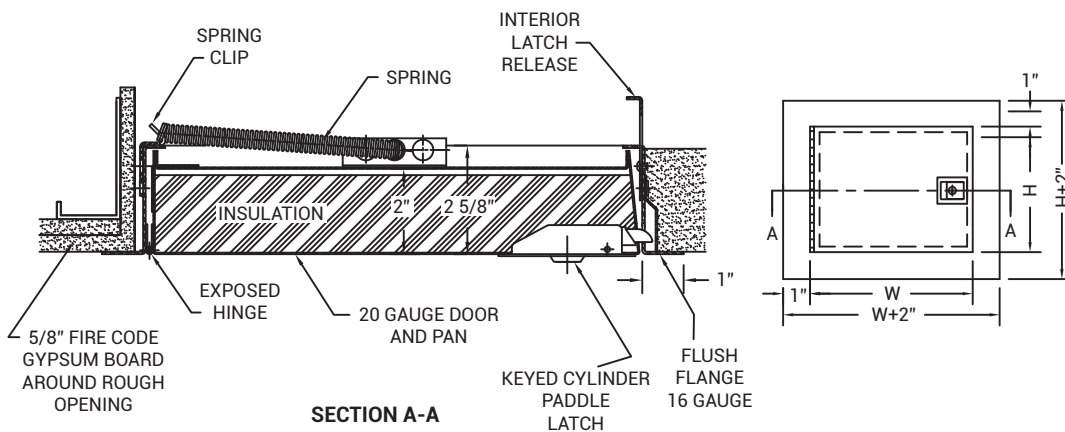

For a complete list of options visit  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)

## PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan or Click



To view Pricing and  
Additional Product Info.

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



228 PARK AVE. S. #76520  
NEW YORK, NY, 10003



WEBSITE:  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)  
E-MAIL:  
[info@bestaccessdoors.com](mailto:info@bestaccessdoors.com)