

Quality Access Doors- FAST

DESCRIPTIONS

For applications requiring smaller vents, single leaf models are available in galvanized steel or aluminum construction and can be provided with polycarbonate domes for added daylight.

SPECIFICATIONS

MATERIAL:

Steel - Cover and frame are 14 gauge (1.9mm) G-90 paint bond galvanized steel Aluminum - Cover and frame are 11 gauge (2.3mm) aluminum

COVER:

Brakeformed, hollow-metal design with 1" (25.4mm) concealed fiberglass insulation, 3" (76mm) beaded, overlapping flange, fully welded at corners, and internally reinforced for 40 psf (195 kg/m2) live load

CURB:

12" (305mm) in height with integral capflashing, 1" (25.4mm) fiberboard insulation, fully welded at corners, and 3-1/2" (89mm) mounting flange with 7/16" holes (11mm) provided for securing frame to the roof deck

GASKET:

Extruded EPDM rubber gasket permanently adhered to the cover

HINGES:

Heavy-duty pintle hinges with 3/8" (9.5mm) Type 316 stainless steel hinge pins

LATCH:

Positive hold/release mechanism controlled by a single UL-listed 165°F (74°C) fusible link. Designed to hold the cover closed against a 90 psf (438 kg/m2) uplift force. Provided with interior and exterior pull release cables to manually open vent cover.

PERFORMANCE RATING:

Complies with UL 790 Class A (burning brand test)

FINISH:

Steel: Alkyd base red oxide primer Aluminum: Mill finish

For a complete list of options visit www.BestAccessDoors.com



To view Pricing and Additional Product Info.

SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-L-40SV Galvanized Single Leaf Automatic Smoke Vent**



>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

COVER

STANDARD SIZES AND WEIGHTS


SIZE		STEEL			STEEL CURB & ALUMINUM COVER			ALUMINUM			ALUMINUM WITH POLYCARBONATE DOME			
W	Weight x Length		Model #	Weight		Model #	Weight		Model #	Weight		Model #	Weight	
inc	ches	mm	WOUEI #	lbs.	kg.	would #	lbs.	kg.	would #	lbs.	kg.	Wodel #	lbs.	kg.
36 2	X 30	914 X 762	S-20SV	193	88	S-40SV	160	73	S-50SV	112	51	GS-50SV	170	78
30 2	X 54	762 X 1372	NB-20SV	260	118	NB-40SV	215	98	NB-50SV	155	70	Consult	Factor	у
30 2	X 96	762 X 2438	L-20SV	423	192	L-40SV	315	143	L-50SV	240	109	Consult	Factor	у

GASKET

(ALL AROUND)

COVER LINER



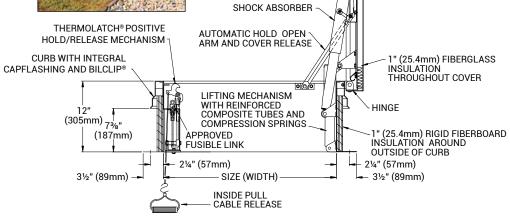

PROJECT DATA

PROJECT NAME :	QTY	w	Н	OPTIONS				
ARCHITECT :								
DEALER :								
CONTRACTOR :								
LOCATION :		SPECIAL INSTRUCTIONS :						
DATE :								
AGGING INSTRUCTIONS :		SUBMITTAL APPROVAL : (signature or stamp)						




228 PARK AVE. S. #76520 NEW YORK, NY, 10003

•



WEBSITE: www.BestAccessDoors.com



Custom Sizes Available - Fast!