



Quality Access Doors- **FAST!**

STANDARD OPTIONS

MATERIAL:
16-gauge cold rolled steel door

HINGE:
Continuous piano hinge

HINGE LOCATION:
Hinges must be located on the second dimension (height)

LOCKING MECHANISM:
Self-latching tool-key operated slam latch and ring operated slam latch, both included

FLANGE:
22-gauge galvanized steel, 2 3/4" plaster bead flange

FRAME:
2 1/2" in depth, made of cold rolled steel

ROUGH OPENING:
Door sizes + 1/4" or + 6mm

INSIDE PANEL RELEASE:
Mechanisms to allow panels to open from inside, standard on all doors over 12" X 12 inches

FINISH:
High quality white powder coat primer

PACKAGING:
Individually wrapped, 1 door per box

For a complete list of options visit
www.BestAccessDoors.com

Scan  or  Click



To view Pricing and
Additional Product Info.

**LEED READY: THIS PRODUCT
CONTRIBUTES TO LEED® CREDITS**



SUBMITTAL/TECHNICAL DATA SHEET

SKU: **BA-L01D-PF**


LARGE OPENING ACCESS PANEL

WITH PLASTER FLANGE




INSTALLATION

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

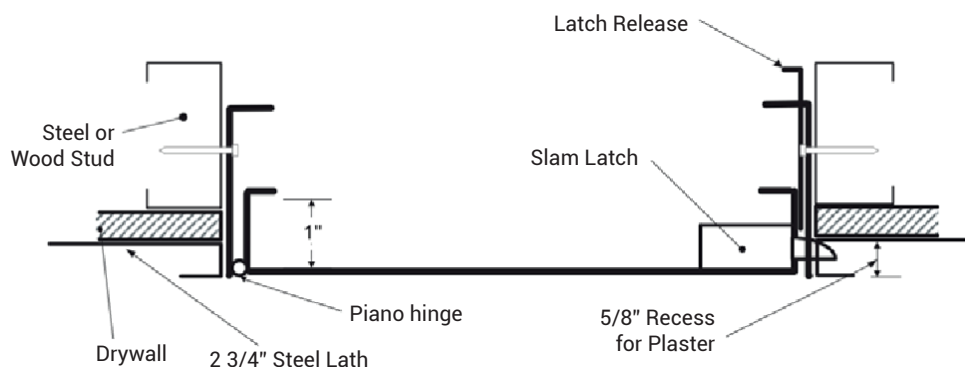

DIMENSIONS AND APPEARANCE

DOOR SIZE W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS KG
48 x 48 (1219 x 1219)	2	62.8 28.5
Rough wall opening door size + 1/4" or +6mm		

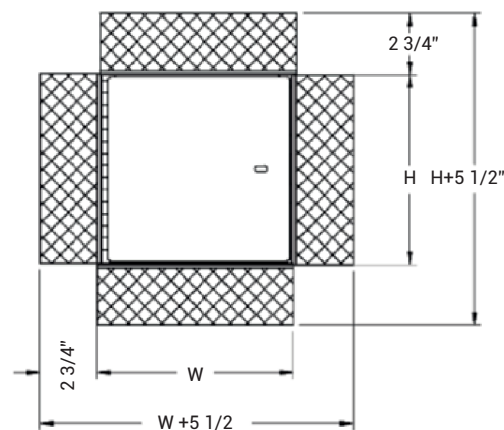

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL :			
TAGGING INSTRUCTIONS :	(signature or stamp)			

TELEPHONE:
1-800-483-0823

FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com

E-MAIL:
info@bestaccessdoors.com