



SUBMITTAL/TECHNICAL DATA SHEET

SPECIFICATIONS

MATERIAL:
14 gauge galvanized steel cover and curb

FINISH: Galvanized Steel: White Powder Coat

COVER: 14 gauge galvanized steel exterior with 22 gauge galvanized steel liner bonded to core of 1" rigid styrofoam insulation.

CURB: 14 gauge galvanized steel with a 12" high curb, integral counterflashing, 3-1/2" wide mounting flanges with pre-drilled holes and 1" exterior fiberboard insulation

GASKET: Extruded EPDM rubber gasket adhered to cover

HINGES: Integrated Pintle Hinge

LIFT ASSIST: Cover operation is assisted by Gas Spring

LATCHES: Slam latch with interior and exterior handles and padlock hasps.

HARDWARE: All hardware is zinc plated (stainless steel hardware optional)

LOAD CAPACITY: 70 psf

CERTIFICATIONS: Florida Product Approval: FL 16737-R2



SKU: **BA-M-1**

SINGLE LEAF ROOF HATCH





DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

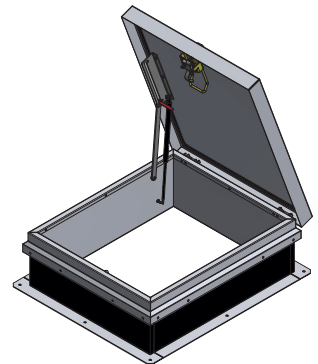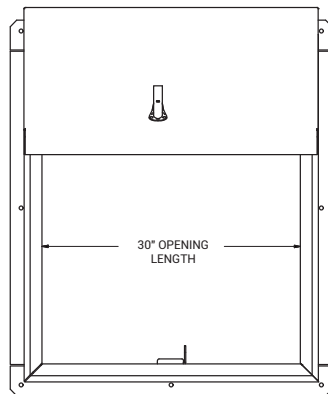

For detailed specifications see submittal sheet

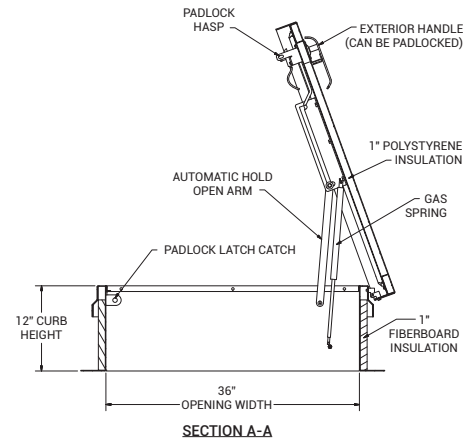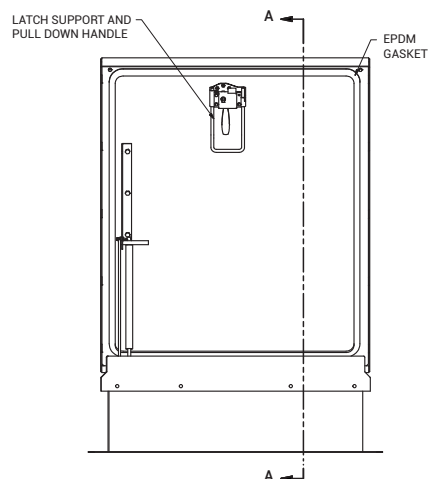

For a complete list of options visit
www.BestAccessDoors.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021




228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-M-1

LADDER ACCESS ROOF HATCHES

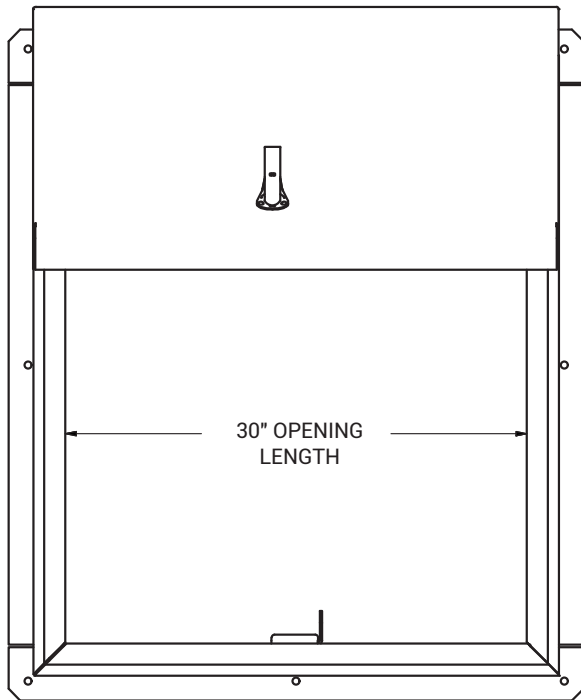

NOTES:

SIZE: M - 3'0" X 2'6"

1. 70 psf COVER LIVE LOAD RATING

2. HATCH POWDERCOATED WHITE

3. MATERIALS

14ga GALVANIZED, COVER

14ga GALVANIZED, CURB

14ga GALVANIZED, COUNTER FLASHING

22ga GALVANIZED, COVER LINER

4. ZINC PLATED HARDWARE

5. GAS SPRING COVER ASSIST

