



Quality Access Doors- **FAST!**

APPLICATIONS

Installation
0°-60°
0°-14° (no flashing required)
15°-60° (EL-D or EH-D flashing required)
Deck mounted

FEATURES


- Suitable for roof pitches between 0-60 degrees
- Infinity glass – virtually frameless surface
- Low-emission and heat-reflecting double glazing or triple glazing with argon gas
- White finished PVC frame interior
- Warm spacer increases condensation resistance
- Channel built into the inner frame of the skylight collects moisture and drains it to the outside
- Hardware included (bit torx t20 and installation screws #10 x 2 in.)

For a complete list of options visit
www.BestAccessDoors.com

SUBMITTAL/TECHNICAL DATA SHEET


SKU: **BA-PDX**

DECK MOUNTED FIXED SKYLIGHT

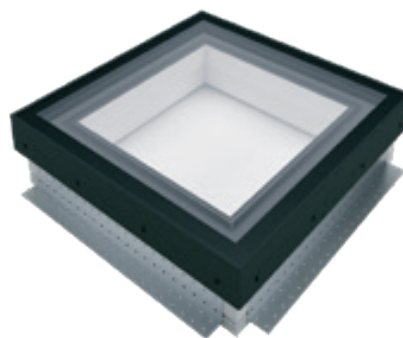

DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

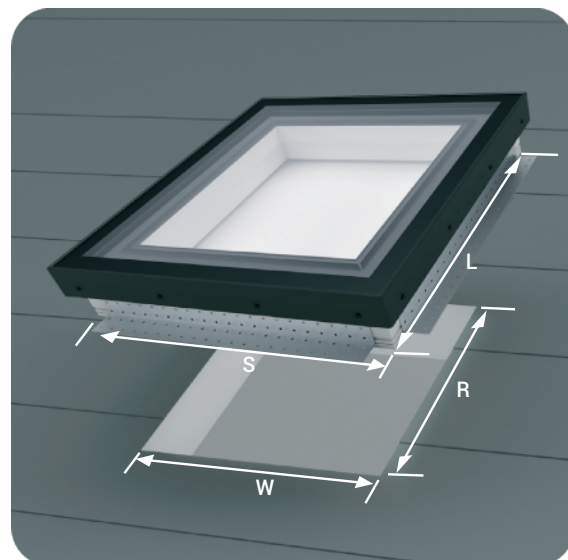

For more details see the second page

ADDITIONAL PRODUCTS TO BE USED:

Flashings	EH-D - for roof tiles, corrugated metal and standing seam EL-D - for shingles and shakes
Ice and Water Guard	- FAKRO Euroband or similar self-adhesive underlayment
Internal accessories	- SRF blackout blind, SRF light reducing blind

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan or Click



To view Pricing and
Additional Product Info.

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com



BA-PDX

DECK MOUNTED FIXED SKYLIGHT

DIMENSIONS:

Size												
Rough opening (WxR)	in.	14 1/2 x 45 3/4	21 x 26 7/8	21 x 37 7/8	21 x 45 3/4	21 x 54 7/16	21 x 70 1/4	30 1/16 x 37 7/8	30 1/16 x 45 3/4	30 1/16 x 54 7/16	44 1/4 x 26 7/8	44 1/4 x 45 3/4
Frame external size (SxL)	in.	20 x 51	26 1/4 x 32 1/8	26 1/4 x 43 1/8	26 1/4 x 51	26 1/4 x 59 5/8	26 1/4 x 75 1/2	35 1/4 x 43 1/8	35 1/4 x 51	35 1/4 x 59 5/8	49 1/2 x 32 1/8	49 1/2 x 51

TECHNICAL PARAMETERS:

Technical parameters	Glazing unit type		
	Unit	G53	Rating
U-factor	[BTU/h ft²F]	0.29	NFRC 100 / NFRC 200
Solar Heat Gain Coefficient	-	0.17	NFRC 100 / NFRC 200
Air Leakage	[cfm/ft²] @ 1.57 psf, tested size 46x46	-	NAFS 2017 & CSA A440S1:19
Visible Transmittance	-	0.33	NFRC 100 / NFRC 200
UV protection	-	99.8	EN 410-2011
Condensation Resistance	-	67	NFRC 100 / NFRC 200
Water Penetration Resistance Test Pressure	[Pa]	720	NAFS 2017 & CSA A440S1:19

FEATURES:

Technical parameters	Multi chamber, insulated PVC frame with white finish (EPS insulation)
Outer frame material	Aluminum with black finish (powder coated, RAL9005)
Glazing	G53 Low-E laminated, triple-pane glazing unit with warm TGI spacer and argon gas
Warranty	10 years for skylights, 20 years for laminated glass against hail (restrictions apply)

