



Quality Access Doors- **FAST!**

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTIONS

Double leaf domed equipment hatches add more daylight into your building with domed equipment hatches.

SPECIFICATIONS

MATERIAL:

STEEL - 14 gauge galvanized with 22 gauge liner.

ALUMINUM - 11 gauge with 22 gauge liner.

FINISH: Gray prime coat on steel, silver prime coat on aluminum.

DOMES: Clear over white acrylic domes.

GASKETING: Continuous bulb neoprene door seal.

INSULATION: 1" fiberglass insulation in cover, 1/2" rigid fiberboard on curb.

HINGES: Heavy-duty hinges.

HOLD-OPEN ARM: Galvanized steel automatic hold-open arms with red vinyl handles.

LATCHES: Two point universal spring latches on each cover with exterior and interior handles.

SPRING: Pressure intensifiers with compression springs provide lift assistance.

SIZES:

Minimum: 72" x 72"

Maximum: 72" x 96"

CLEAR OPENING: Minus 8" on width and minus 8" on length.

SKU: **BA-REHVG**

DOMED EQUIPMENT HATCH



DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

STANDARD SIZE CHART:





MODEL	MATERIAL	CURB OPENING	CLEAR OPENING
REHVA-7272ST	Aluminum	72" x 72"	64" x 64"
REHVA-7296ST	Aluminum	72" x 96"	64" x 88"
REHVG-7272GT	Steel	72" x 72"	64" x 64"
REHVG-7272ST	Steel Curb & Aluminum Cover	72" x 72"	64" x 64"
REHVG-7296ST	Steel Curb & Aluminum Cover	72" x 96"	64" x 88"

FINISH:

- GT Powder Coat Gray Texture (Std for REHVG)
- ST Powder Coat Silver Texture (Std for REHVA, REHVG)

OPTIONS:

- CD - Double Wall Curb
- CM - Curb Mount
- H18 - 18" High Curb
- SS - Stainless Hardware
- IS - 1" Fiberboard Insulated Curb
- IT - 2" Polyiso Insulated Curb
- IW - 1" x 6" Wood Nailer Top/Polyiso Bottom of Curb
- VPCW - Double Polycarbonate Clear over White Dome
- VAW - Acrylic Single Dome White
- VPW - Polycarbonate Single White

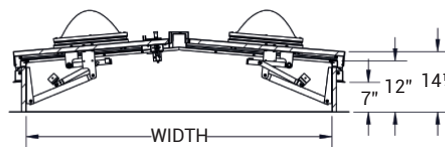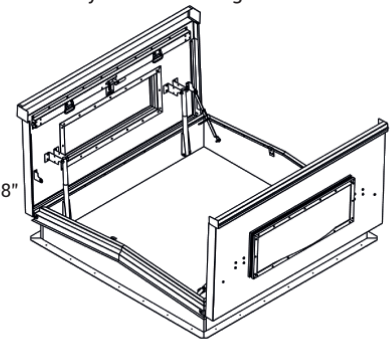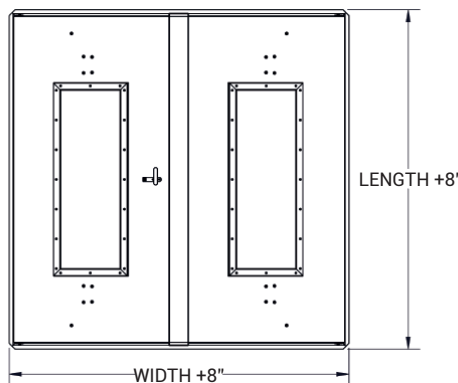

For a complete list of options visit
www.BestAccessDoors.com

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan  or  Click



To view Pricing and
Additional Product Info.

TELEPHONE:

1-800-483-0823

FAX:

1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:

www.BestAccessDoors.com

E-MAIL:

info@bestaccessdoors.com