

Quality Access Doors- FAST!

APPLICATION

Acudor Domed Roof Hatches are designed to provide convenient, economical access to the roof of a building. The Polycarbonate Domes provide the benefit of a skylight

FEATURES

- G90 Galv. Steel
- Stainless Steel Hardware
- Clear, bronze, white, combination polycarbonate double-skin dome

OPTIONAL FEATURES

- Stainless Steel cover, curb
- Louvered Curbs
- Curb Mounted Units
- · Curb pitch corrected for sloped roof
- All Aluminum construction, cover and curb

SPECIFICATIONS

COVER: Double-skin construction ("in box type design") with 1" Polyiso (R-6) insulation and a continuous EPDM foam weather/draft seal gasket that is attached to the inside of cover to provide a flush, tight fit. Designed to support a live load of 40lbs./sq. ft., the cover is 1/8" thick aluminum, with a 20 gauge aluminum inside liner

CURB: 14 gauge galvanized steel with 1" thick Polyiso (R-6) insulation with Fiberglass liner at curb exterior. Curb is 12" high, with 3.375" wide bottom flange and pre-drilled mounting

HINGE: Heavy duty galvanized steel pintle hinges with 3/8" SS pin

OPENING: Gas spring operators allow cover to open and close with ease. Stainless Steel inside pull handle allows for easy control when closing cover.

DOOR LATCH: Self latching, Stainless Steel outside T handle with stainless steel inside lock and lever assembly. Unit also has inside and outside padlock provisions.

FINISH: Material is prepared with an iron phosphate wash, followed by a rust inhibiting primer, and then a baked on polyester enamel grey paint

For a complete list of options visit www.BestAccessDoors.com

Scan or () Click

SUBMITTAL/TECHNICAL DATA SHEET

SKU: BA-RHGDD


GALVANIZED DOMED
ROOF HATCH



■ DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

MODEL	CURB ID L&W INCHES (MM)	WEIGHT LBS KG		
GD3232	24 x 24 (610 x 610)	125 56.8		
GD3238	24 x 36 (610 x 914)	135 61.4		
GD3244	30 x 30 (762 x 762)	140 63.5		
GD3838	30 x 36 (762 x 914)	155 70.5		
GD3844	36 x 36 (914 x 914)	170 77.3		

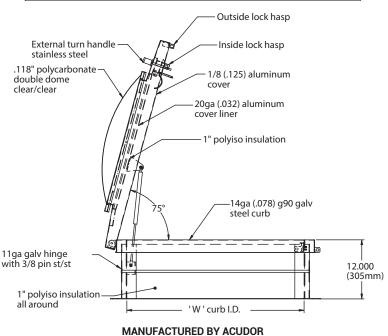

■ PROJECT DATA

Custom Sizes Available - Fast!

	PROJECT NAME:	QTY	W	Н	OPTIONS	
	ARCHITECT:					
	DEALER:					
	CONTRACTOR:					
	LOCATION:	SPECIAL INSTRUCTIONS:				
	DATE:					
	ING INSTRUCTIONS: SUBMITTAL APPROVAL: (signature or stamp)					



To view Pricing and Additional Product Info.



TELEPHONE: 1-800-483-0823 FAX:

1-888-828-6021



228 PARK AVE. S. #76520 NEW YORK, NY, 10003



WEBSITE: www.BestAccessDoors.com