



Quality Access Doors- **FAST!**

# SUBMITTAL/TECHNICAL DATA SHEET

## APPLICATION

Designed for interior and exterior applications that require an access opening that will blend in with the surrounding floor material

## FEATURES

- Recessed 1" to accommodate ceramic tile/concrete
- To keep the floor material from cracking or chipping within the door panel, the security screws are located in the flange of the mounting frame

## SPECIFICATIONS

**MATERIAL:** Aluminum

**DOOR:** 1/4" smooth aluminum plate reinforced for live loads of 150 pounds/sq.ft. / recessed 1" for ceramic tile/concrete

**FRAME:** 1-1/2" x 1-1/4" aluminum angle with mounting holes in top flange


**STANDARD LATCH:** Door panel is secured to frame with 1/4" x 1" flat head screws

**FINISH:** Mill finish

For a complete list of options visit  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)

SKU: **BA-RRFD-C1**

## REMOVABLE FLOOR HATCH RECESSED 1" FOR CONCRETE

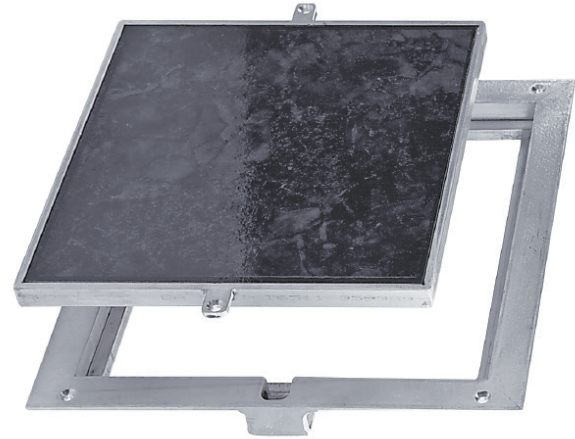



## DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<



| DOOR SIZE W x H<br>INCHES (MM) |             | WEIGHT<br>LBS KG |      |
|--------------------------------|-------------|------------------|------|
| 8 x 8                          | (203 x 203) | 6                | 2.7  |
| 12 x 12                        | (305 x 305) | 9                | 4.1  |
| 18 x 18                        | (457 x 457) | 18               | 8.2  |
| 24 x 24                        | (610 x 610) | 36               | 16.3 |

For detailed specifications see submittal sheet

MANUFACTURED BY ACUDOR

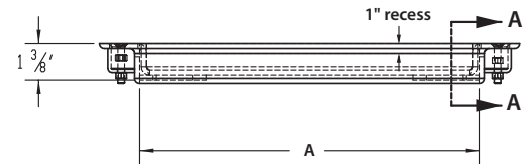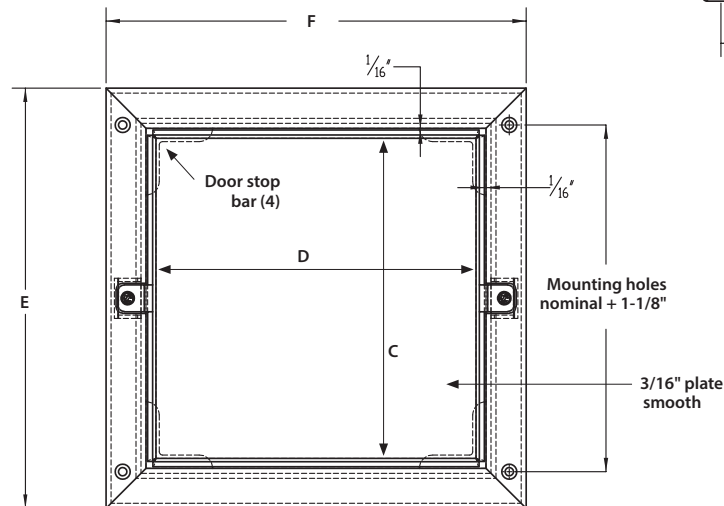

SECTION A-A

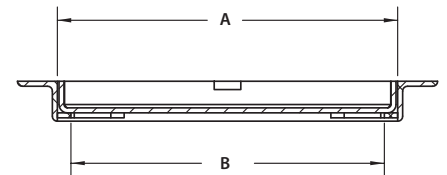

DOOR STOP DETAIL

- NOTES:
- MATERIAL: ALUMINUM
  - LOADING: 150 LBS. PER SQ. FT.
  - 316 STAINLESS STEEL NUTS & BOLTS

## PROJECT DATA

Custom Sizes Available - Fast!

|                        |                                              |   |   |         |
|------------------------|----------------------------------------------|---|---|---------|
| PROJECT NAME :         | QTY                                          | W | H | OPTIONS |
| ARCHITECT :            |                                              |   |   |         |
| DEALER :               |                                              |   |   |         |
| CONTRACTOR :           |                                              |   |   |         |
| LOCATION :             | SPECIAL INSTRUCTIONS :                       |   |   |         |
| DATE :                 | SUBMITTAL APPROVAL :<br>(signature or stamp) |   |   |         |
| TAGGING INSTRUCTIONS : |                                              |   |   |         |

Scan  or  Click



To view Pricing and  
Additional Product Info.

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



228 PARK AVE. S. #76520  
NEW YORK, NY, 10003





WEBSITE:  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)  
E-MAIL:  
[info@bestaccessdoors.com](mailto:info@bestaccessdoors.com)

# BA-RRFD-C1

## REMOVABLE FLOOR HATCH RECESSED 1" FOR CONCRETE


| NOMINAL DOOR SIZE | FRAME OPENING |              | RECEIVING AREA |              | OVERALL SIZE |              | WEIGHT    |
|-------------------|---------------|--------------|----------------|--------------|--------------|--------------|-----------|
| in. (mm)          | A in. (mm)    | B in. (mm)   | C in. (mm)     | D in. (mm)   | E in. (mm)   | F in. (mm)   | LBS. (KG) |
| 8 x 8             | 8.750 (222)   | 7.750 (222)  | 8.125 (206)    | 8.125 (206)  | 11.750 (298) | 11.750 (298) | 5 (2.2)   |
| 12 x 12           | 12.750 (324)  | 11.750 (324) | 12.125 (308)   | 12.125 (308) | 15.750 (476) | 15.750 (476) | 7 (3.2)   |
| 18 x 18           | 18.750 (476)  | 17.750 (476) | 18.125 (460)   | 18.125 (460) | 21.750 (552) | 21.750 (552) | 15 (6.8)  |
| 24 x 24           | 24.750 (629)  | 23.750 (629) | 24.125 (613)   | 24.125 (613) | 27.750 (705) | 27.750 (705) | 36 (16.3) |

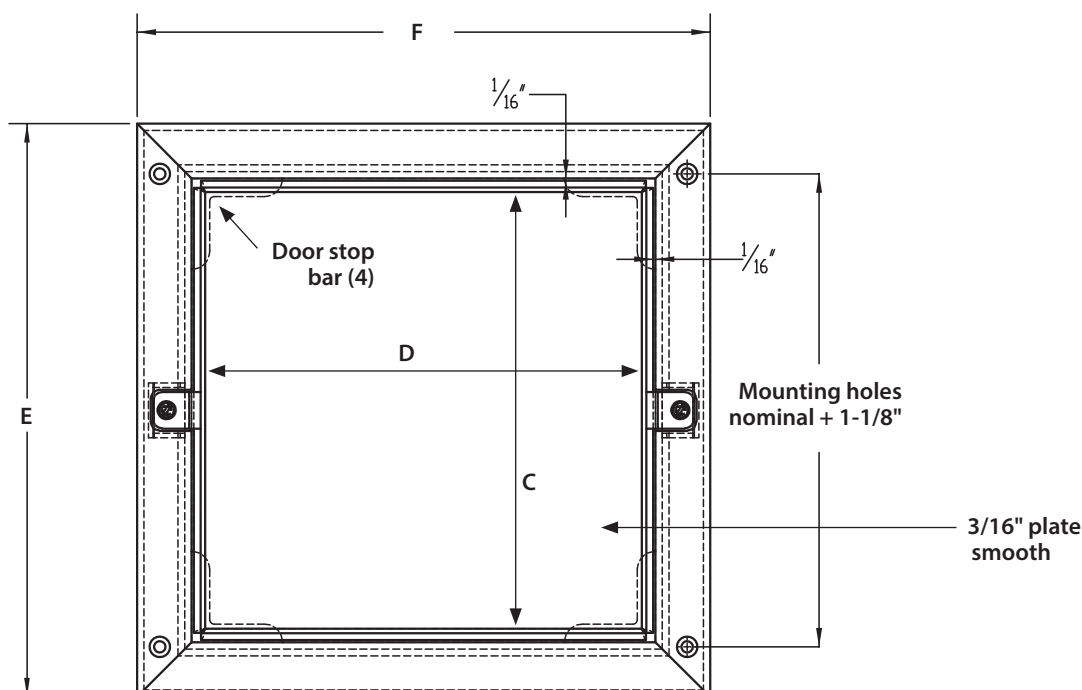

DOOR STOP DETAIL

**NOTES:**

- MATERIAL: ALUMINUM
- LOADING: 150 LBS. PER SQ. FT.
- 316 STAINLESS STEEL NUTS & BOLTS

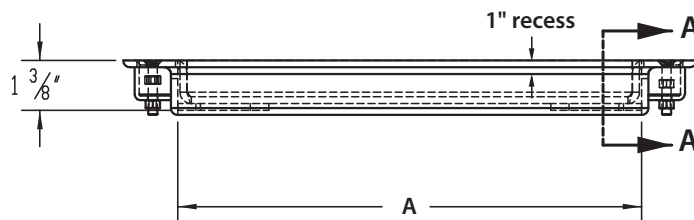

**SECTION A-A**

