



Quality Access Doors- **FAST!**

SUBMITTAL/TECHNICAL DATA SHEET

SPECIFICATION

DOOR AND TRIM: 14 ga. steel. Trim being 1-1/2" wide.

DOOR STOPS: 18 ga. steel. On 3 sides of door opening.

HINGE: Full length piano hinge allows door to open to 180°, will be placed on long side of door unless otherwise requested.

LATCHES: Flush, stainless steel cam operated with screwdriver. Latches are positioned opposite hinge as well as top and bottom on larger sizes.

FINISH: Electrostatically applied baked grey enamel, over rust-inhibiting phosphate treated steel. This coating can be used as a finish or as a prime coating.

OPTIONS (at additional cost)

- Stainless Steel Type 304 or 316
- Cylinder locks - keyed alike with 2 keys per lock (key code 151)
- Tamper proof screws

For a complete list of options visit
www.BestAccessDoors.com

SKU: **BA-SMP**

SURFACE MOUNTED ACCESS DOOR




DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

DOOR SIZE W X H	WALL OPENING	CAM LATCH	SHIP WT. LBS.
8 X 8	TO	1	2
10 X 10	SUIT	3	3
12 X 12	DOOR	3	4
14 X 14	PANEL	3	5

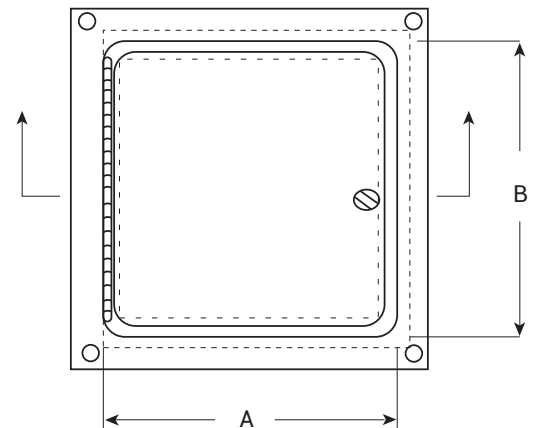

ELEVATION

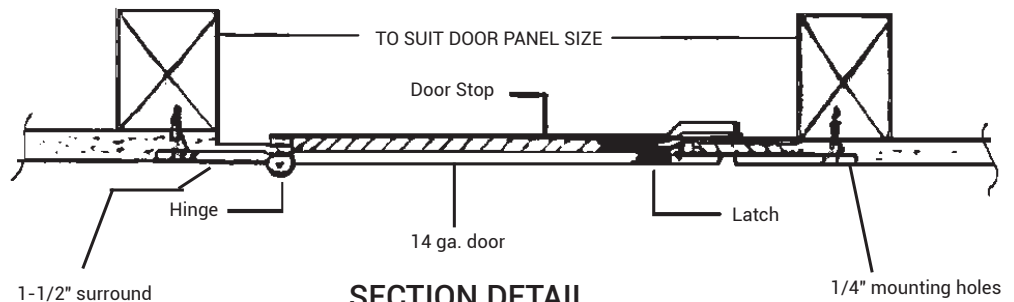

SECTION DETAIL

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan or Click



To view Pricing and
Additional Product Info.

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com