



Quality Access Doors - FAST!

# SUBMITTAL/TECHNICAL DATA SHEET

## APPLICATION

The SM is an economical surface-mounting panel that quickly and easily installs with screws through the corners of the frame. It is suitable for installation in wallboard or plaster.

## SPECIFICATIONS

### FRAME:

16 gauge stainless steel with 1" wall flange - 1-5/8" depth.

### DOOR:

16 gauge stainless steel mounted with 90° continuous, concealed hinge.

### FINISH:

304 stainless steel.

**LOCK:** Flush screwdriver-operated steel cam "C".

### SIZES:

Minimum 8" x 8", maximum wall 36" x 36", maximum ceiling 24" x 24".

**OPTIONS:** #4 Satin Finish Stainless Steel (SMS), Custom Colors, Cylinder Lock, Knob Cam, Torx, Spanner or Hex Cam.

SKU: **BA-SMS**

## SURFACE MOUNT ACCESS DOOR

FOR INTERIOR WALLS & CEILINGS - STAINLESS STEEL



## DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

MODEL SIZE H x W	OUTSIDE FRAME DIMENSIONS		WALL OPENING DIMENSIONS		SHIPPING WEIGHT	LATCH
	WIDTH	HEIGHT	WIDTH	HEIGHT		
8 x 8	10"	10"	8"	8"	3 lbs	1
8 x 8	14"	14"	12"	12"	7 lbs	1
8 x 8	18"	18"	16"	16"	12 lbs	1
8 x 8	26"	26"	24"	24"	27 lbs	4

Standard Color is White  
Optional Colors at Additional Cost




### LATCH AND LOCK OPTIONS

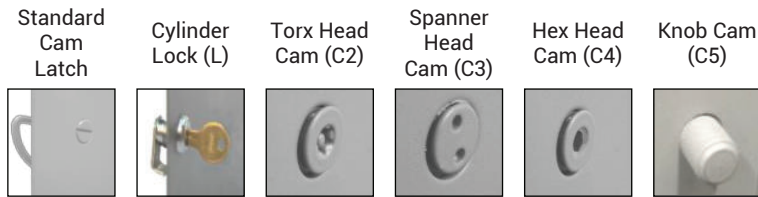

For detailed specifications see submittal sheet



SMS

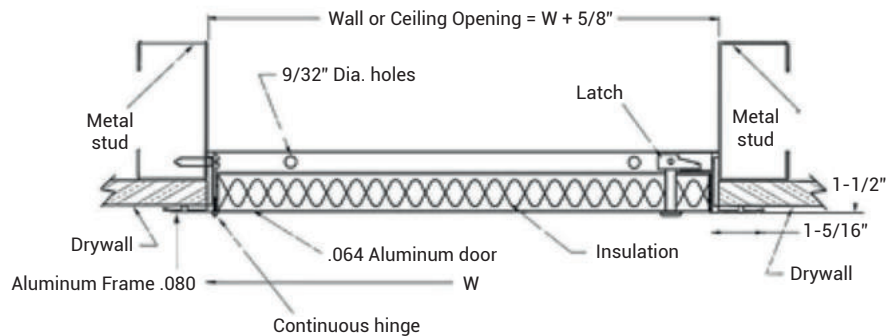

For a complete list of options visit [www.BestAccessDoors.com](http://www.BestAccessDoors.com)

## PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

Scan or Click



To view Pricing and Additional Product Info.

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



228 PARK AVE. S. #76520  
NEW YORK, NY, 10003



WEBSITE:  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)

E-MAIL:  
[info@bestaccessdoors.com](mailto:info@bestaccessdoors.com)