



Quality Access Doors- **FAST!**

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTION

The SP series by Best Access Doors in 10 gauge steel with detention deadlock. Heavy duty hinges are welded to the heavy duty frame, and the door rests on heavy duty stops. Ideal for detention and security facilities.

SPECIFICATION

FRAME: 2" x 2" x 3/16" angle frame with 2" Flange, welded at corners with 1" door stop.

DOOR: 10 gauge plate steel door mounted on two heavy-duty detention hinges welded to the frame.

FINISH: White powder coat paint.

LOCK: Detention Deadbolt

OPTIONAL LOCKS: Detention deadbolt prep, detention slam latch prep, mortise cylinder cam lock prep, mortise deadbolt prep, detention slam lock, mortise deadbolt, mortise cylinder cam lock

ANCHOR: Heavy duty steel masonry anchors welded to frame at factory.

SIZES:

Min. Size 8" x 8" (20.3 x 20.3 cm)

MAX. SIZE WALL:

48" x 48" (121.9x121.9 cm)

MAX. SIZE CEILING:

24" x 24" (71.1 x 71.1 cm)

SKU: **BA-SP**


FLAT FRAME 10 GAUGE STEEL SECURITY PANEL

WITH DETENTION DEADLOCK




DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

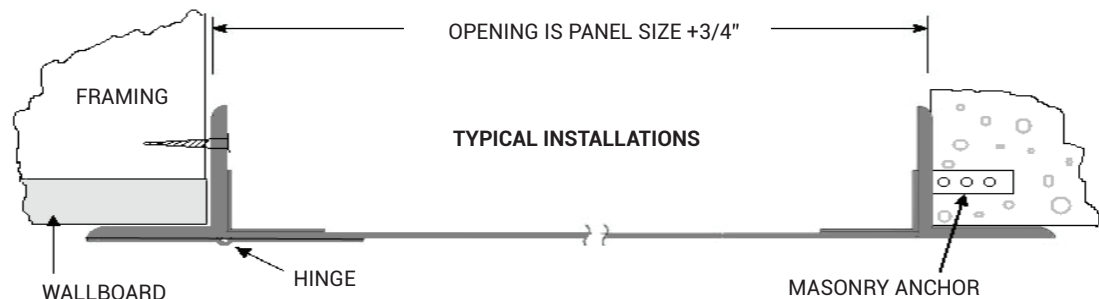

CONSTRUCTION DETAIL

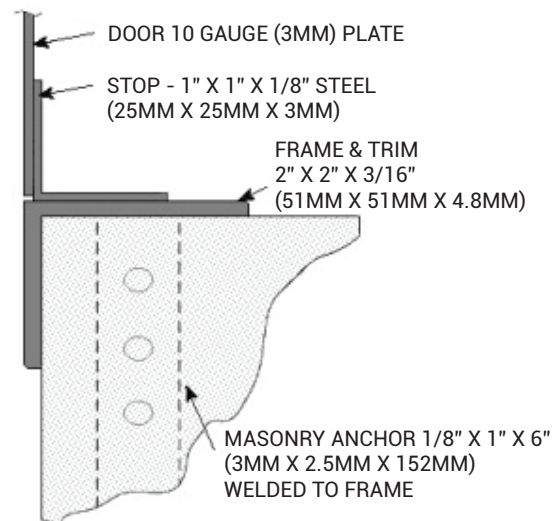

PROJECT DATA

Custom Sizes Available - Fast!

Scan  or  Click



To view Pricing and
Additional Product Info.

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com