




8 7 6 5 4 3 2 1

D

C

B

A

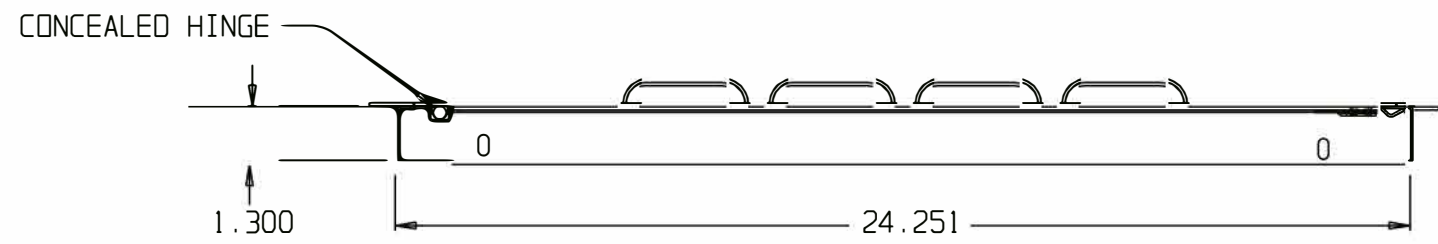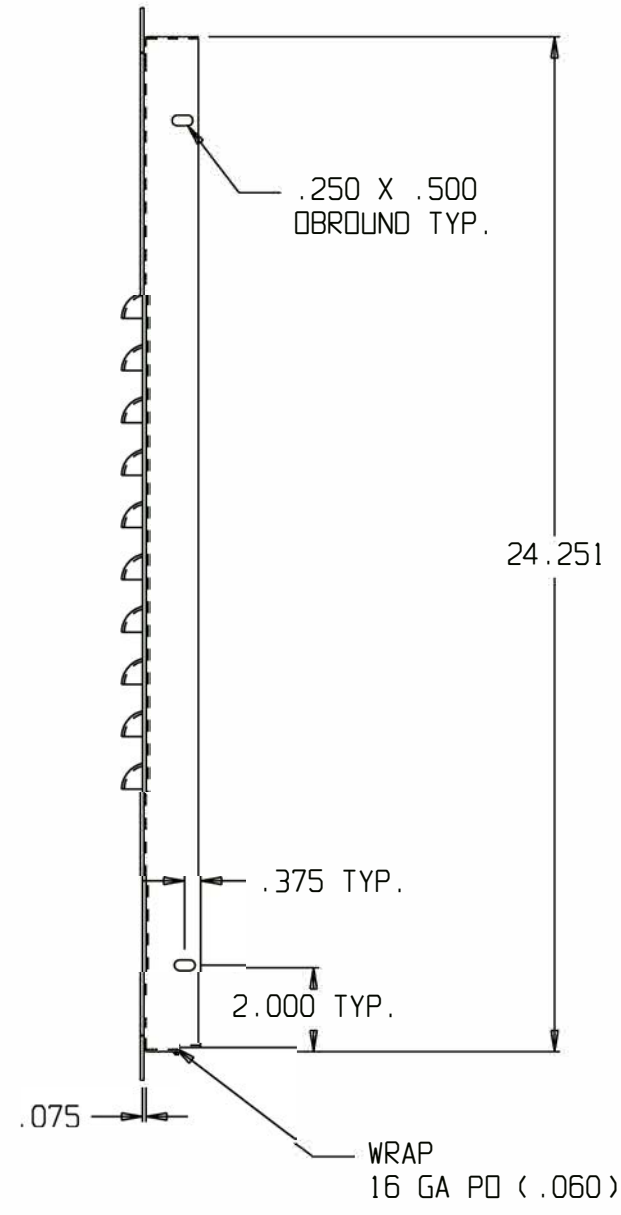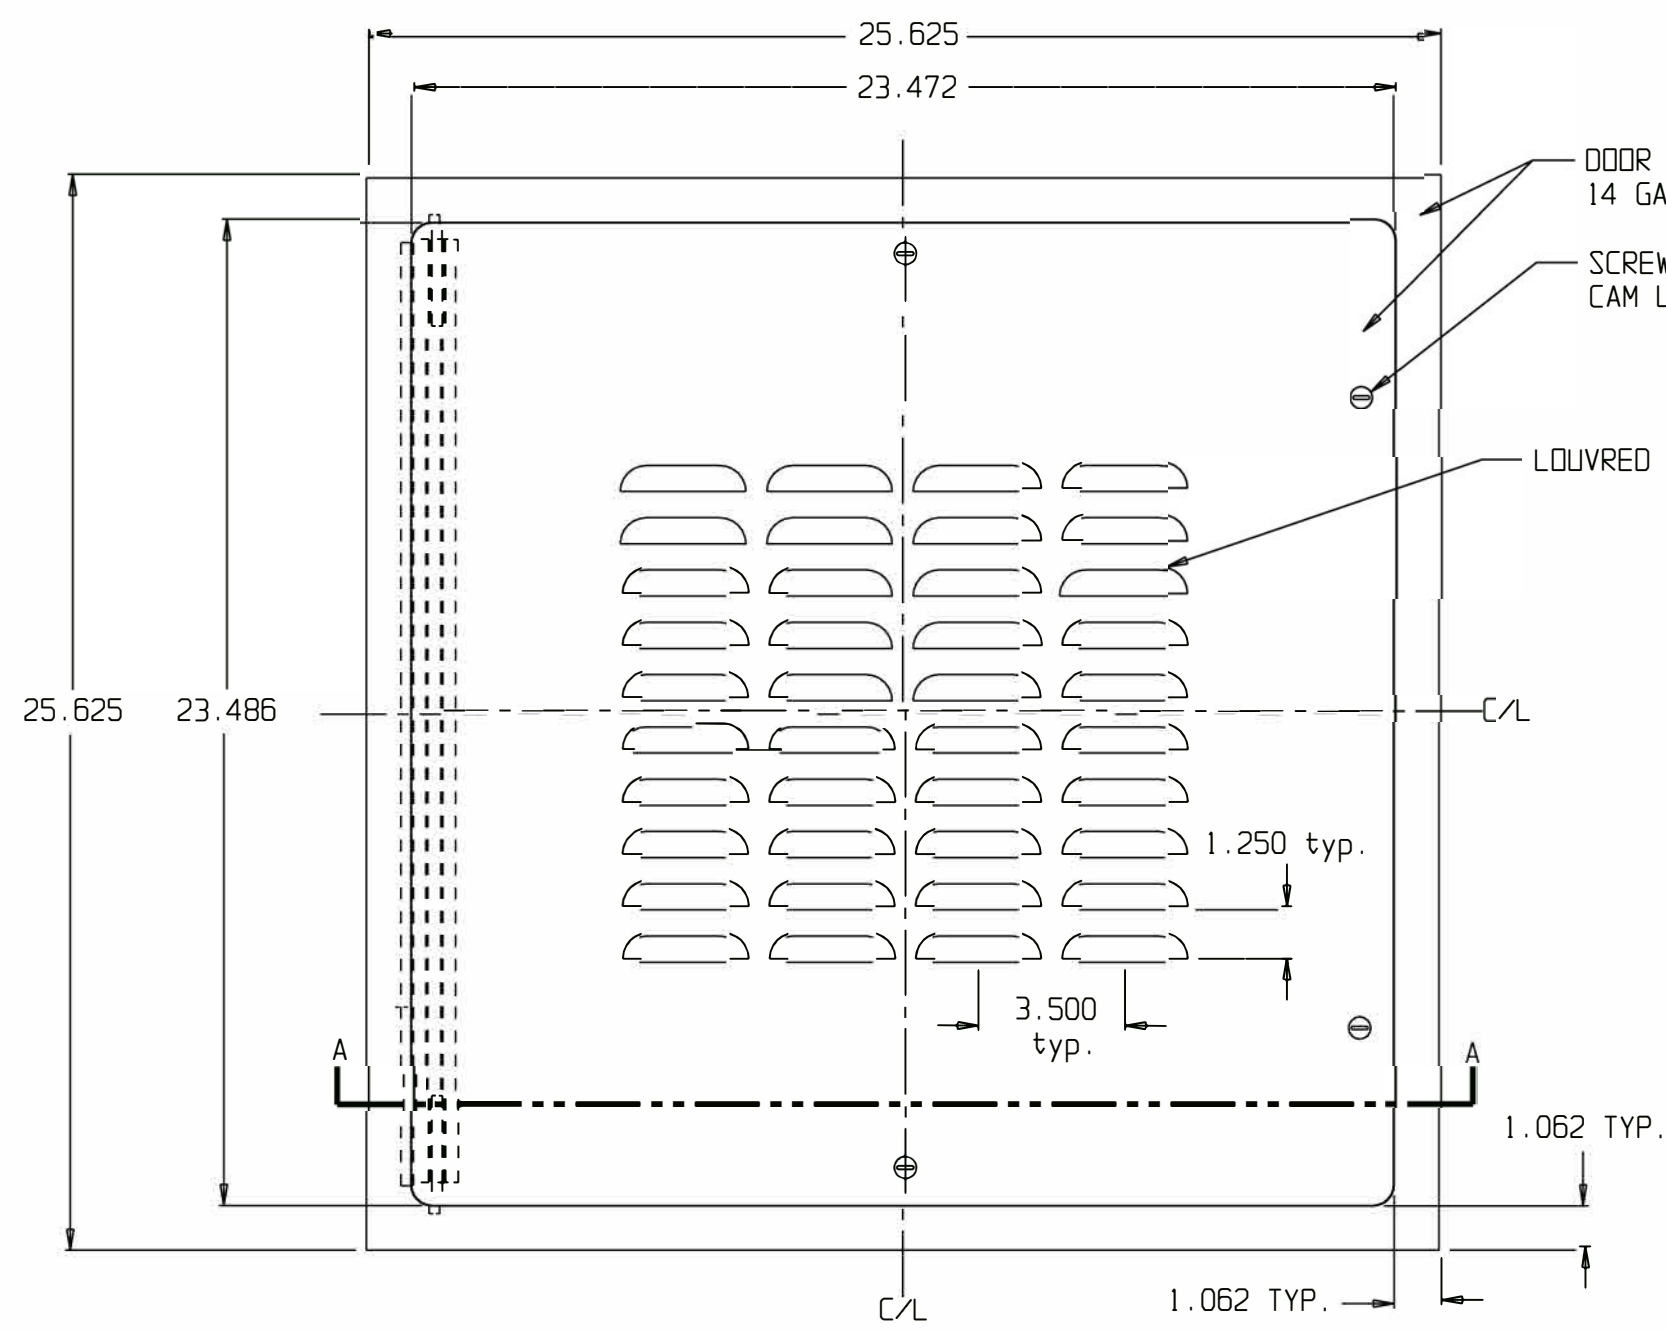

For more information, contact Best Access Doors

www.BestAccessDoors.com

PROJECTION THIRD ANGLE 	STANDARD FIG. TOLERANCES ARE	SET BACK	ING. BEND RADIUS	PART NO.	DESCRIPTION
	UP TO 40" LG +/- .015 OVER 40" LG +/- .031 ANGLES: +/- 1/2 DEG. HOLES: +/- .003/- .000 UNLESS OTHERWISE SPECIFIED ON THE DRAWING. TOLERANCES ARE NON-CUMULATIVE. ANGLES NOT DIMENSIONED ARE 90 DEG.	N/A	N/A		UF-5000 24X24-SC ACCESS DOOR LOUVRED
ALL DIMENSIONS SHOWN IN INCHES TAKEN FROM OUTSIDE UNLESS OTHERWISE SPECIFIED. FORM ALL PARTS WITH BURR TO INSIDE BLANK SHOWN BURR SIDE DOWN	MATERIAL	DO NOT SCALE DRAWING		DATE	Phone: 1-800-483-0823 Fax: 1-888-828-6021 sales@bestaccessdoors.com
PRIMER GRAY B/E	14 GA PD (.075)	APPROVED	C CERNY	OCT 23/07	
		CAD. FILE			UF 24X24 SCPCLV

DATE	REVISIONS

8 7 6 5 4 3 2 1