

**WSR Series**



---

**Weather Strip Removable Access Doors**

**Weather Strip Removable Access Doors** are designed with flush gaskets between the panel and frame to ensure flush air seal in all types of walls and ceilings. *Note: Door has **NOT** been tested for air tightness.*

**Door and Frame** shall be 16 gage galvanized steel with a white prime coat finish.

**Frame** is a one piece construction 1" wide and produces perfect concealment of the rough wall openings. Wall frame is provided with 1/4" mounting holes for fastening within the furred spaces allowing faster installation and giving maximum clearance.

**Door** is fully removable and held in place by multiple latches.

**Latch** is a screwdriver operated.

**Finish** is a white prime coat suitable for painting.

**Guide Specification**

Provide Elmdor® WSR series, Weather Strip Removable access door (specify model number and options). Access door and frame shall be gasketed between the panel and frame to ensure flush air seal in all types of walls and ceilings. Access door and frame shall be fabricated from 16 gage, galvanized steel with a white prime coat finish. The door shall have rounded safety corners. Frame shall be one piece construction with no miters or welds on the face. Latches shall be screwdriver operated. Finish shall be a white prime coat suitable for painting.



Member of U.S. Green  
Building Council



Revised: 10/25/16



Toll Free Phone: 1-800-483-0823  
International: +1-(718) 841-7448

Toll Free Fax: 1-888-828-6021  
Email: info@bestaccessdoors.com

Website: www.bestaccessdoors.com

**MODEL NUMBER AND OPTIONS SELECTION**

**BASE MODEL NUMBER**

WSR Weather Strip Removable Access Door


**Suffix Options**

- AKL Allen Key Latch
- CL Cylinder Lock (one per door)
- CLD Cylinder Lock with Dust Shutter (one per door)
- SS Stainless Steel Construction (Type 304 No. 4 Satin Finish)
- TH 'T' Handle

**STANDARD AVAILABLE SIZES**

Special sizes available upon request.

NOMINAL DOOR SIZE (W x H)	WALL OPENING	LATCHES	WEIGHT
WSR 8" x 8"	8-1/2" x 8-1/2"	4	3.0 lbs.
WSR 10" x 10"	10-1/2" x 10-1/2"	4	4.0 lbs.
WSR 12" x 12"	12-1/2" x 12-1/2"	4	5.5 lbs.
WSR 14" x 14"	14-1/2" x 14-1/2"	4	6.0 lbs.
WSR 16" x 16"	16-1/2" x 16-1/2"	4	7.5 lbs.
WSR 18" x 18"	18-1/2" x 18-1/2"	6	9.0 lbs.
WSR 24" x 24"	24-1/2" x 24-1/2"	8	15.0 lbs.

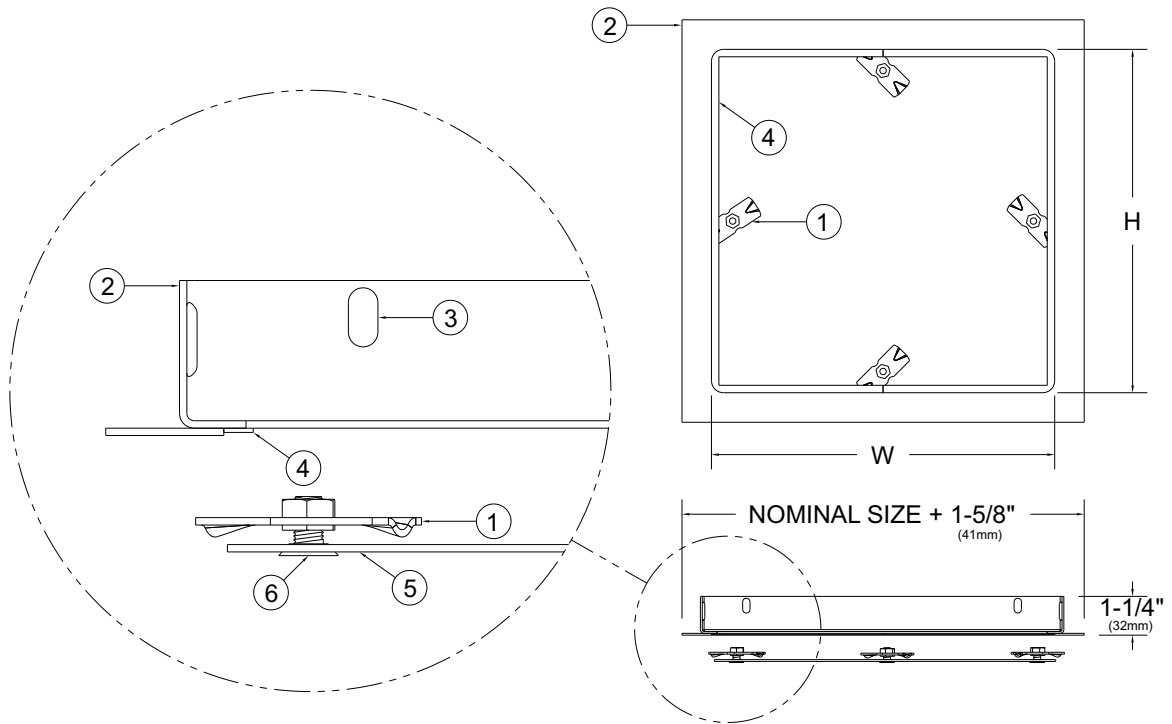

- 1. LATCH ASSEMBLY
- 2. FRAME
- 3. FRAME MOUNTING HOLE
- 4. WEATHER STRIP GASKET
- 5. 16 GAGE DOOR PANEL
- 6. SLOTTED FLAT HEAD SCREW

SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	
Model Number & Options _____	Quantity _____
Company _____	Date _____
Contact _____	Title _____
Approval for Manufacturing/Signature _____	

**WSR**

Revised: 10/25/16