



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

SPECIFICATIONS

MATERIAL:

- F: 1/4" Aluminum Tread Plate and extruded aluminum frame.
- T & Z: 1/8" Aluminum Plate and extruded aluminum frame

FINISH: Mill Finish

COVER:

- F: Diamond patterned safety tread plate designed to support 150 psf live load.
- T: 1/8" Recessed for floor tile to support minimum of 200 psf live load.
- Z: 11/16" Recessed for terrazzo to support minimum of 200 psf live load.

FRAME:

- F & T: 1/8" Extruded aluminum frame w/ integral masonry anchors.
- Z: 1/8" fully welded and mitered aluminum frame w/ welded masonry anchors.

GASKET: 1/16" Neoprene gasket adhered to frame ledge.

LATCH: NONE.

HANDLE: Lift Ring for easy access.

LIFT ASSISTANCE: NONE.

HARDWARE: Stainless steel.


SKU: **BA-T-SEC-SL**

EXTRUDED ALUMINUM CONSTRUCTION FLOOR DOOR



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

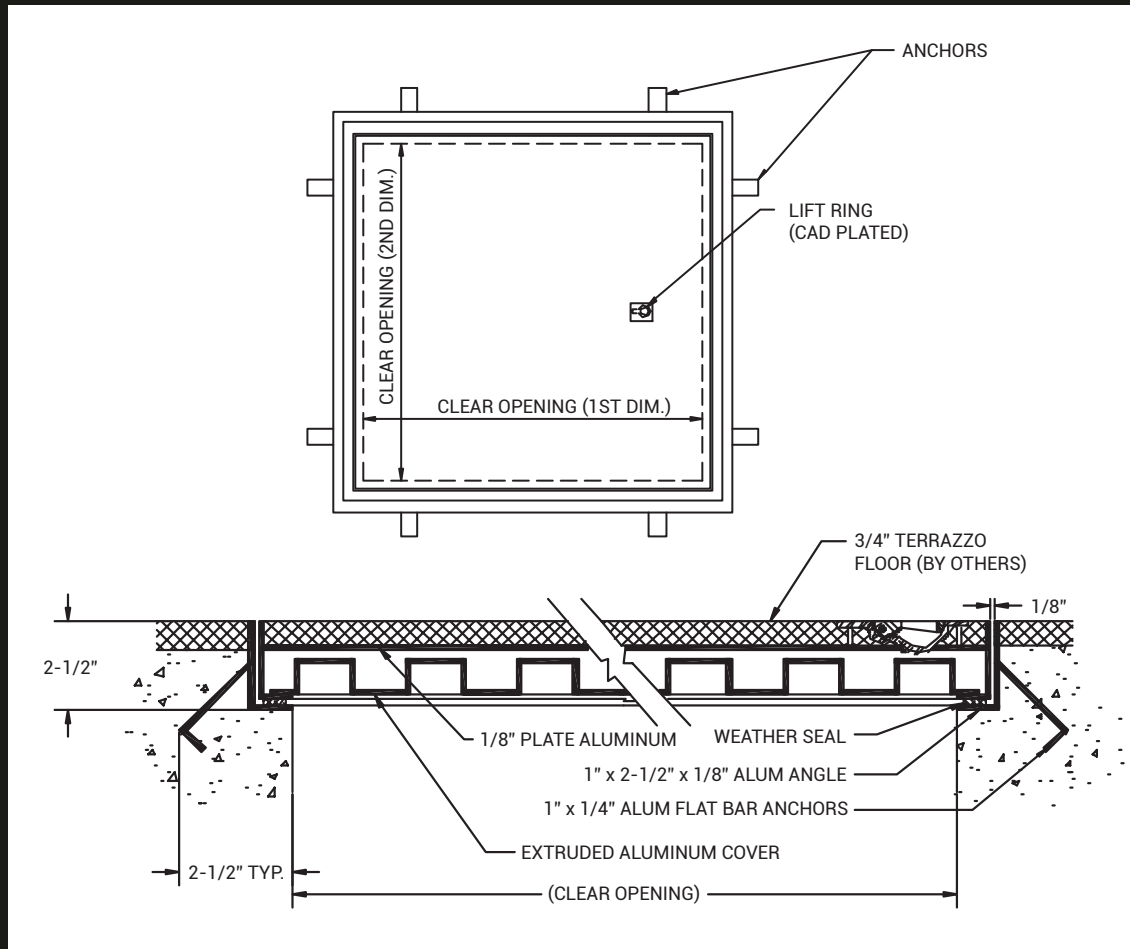

For a complete list of options visit www.BestAccessDoors.com

PROJECT DATA

Custom Sizes Available - Fast!

Scan or Click



PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :	SUBMITTAL APPROVAL : (signature or stamp)			
TAGGING INSTRUCTIONS :				

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

To view Pricing and Additional Product Info.