



Quality Access Doors- FAST!

# SUBMITTAL/TECHNICAL DATA SHEET

## STANDARD OPTIONS

**MATERIAL:**

16 gauge cold rolled steel

**HINGE:** Pin and spring pin hinge, located on the second dimension (height)

**LOCK / LATCH:** Screwdriver operated cam latch in cold-rolled steel

**FINISH:** High quality white powder coat primer

**PACKAGING:** Individually wrapped, 1 door per box

**FLANGE:** 22-gauge galvanized steel, 1 5/8" drywall bead flange

**FRAME:** 1 5/8" in depth, made of cold rolled steel

## OPTIONS AVAILABLE

**LOCK / LATCH:**

- Key-operated cylinder cam latch
- Mortise cam latch preparation (cylinder optional)
- Hex head cam latch

**HANDLE:**

- 4" handle-operated cam latch
- 4" handle and key operated cam latch

**MATERIAL:**

- Stainless steel (SS)

For a complete list of options visit [www.BestAccessDoors.com](http://www.BestAccessDoors.com)

**LEED READY: THIS PRODUCT CONTRIBUTES TO LEED® CREDITS**




SKU: **BA-AHRLO-DF**

## REMOVABLE AIR HANDLER FLUSH ACCESS DOOR

WITH LARGE OPENING & DRYWALL FLANGE


### ■ INSTALLATION

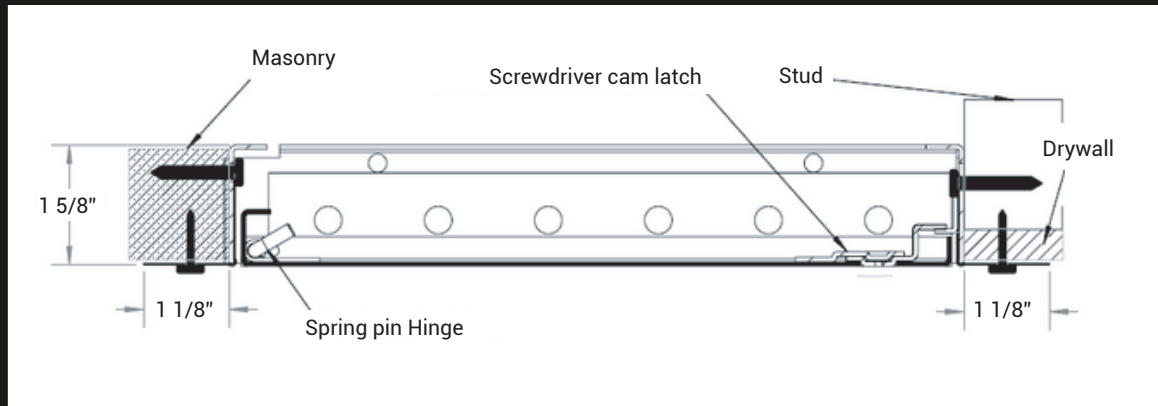

### ■ DIMENSIONS AND APPEARANCE

DOOR SIZE W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT	
		LBS	KG
22 x 30 (558 x 762)	2	18.1	8.2
22 x 36 (558 x 914)	2	21.2	9.6
24 x 30 (609 x 762)	2	19.5	8.9
24 x 36 (609 x 914)	2	22.8	10.3
24 x 48 (609 x 1219)	2	29.4	13.3
30 x 30 (762 x 762)	4	25.0	11.3
30 x 36 (762 x 914)	4	26.8	12.1
36 x 36 (914 x 914)	4	31.3	14.2
36 x 48 (914 x 1219)	4	40.9	18.5
48 x 48 (1219 x 1219)	4	52.3	23.7

Rough wall opening door size + 1/4" or + 6mm

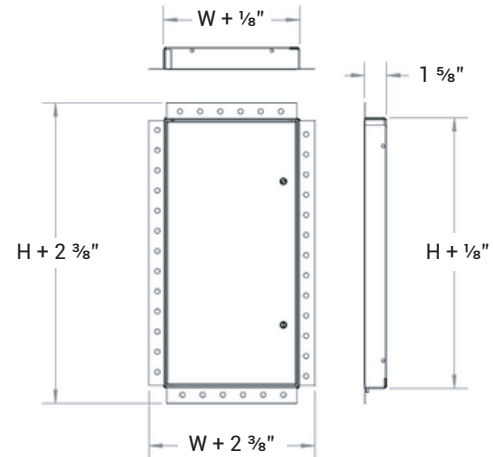

### ■ PROJECT DATA

**Custom Sizes Available - Fast!**

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



228 PARK AVE. S. #76520  
NEW YORK, NY, 10003



WEBSITE:  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)  
E-MAIL:  
[info@bestaccessdoors.com](mailto:info@bestaccessdoors.com)