



Quality Access Doors- FAST!

SUBMITTAL/TECHNICAL DATA SHEET

STANDARD OPTIONS

- MATERIAL:**
16-gauge cold-rolled steel
- HINGE:**
Concealed spring pin hinge, located on the second dimension (height)
- LOCK / LATCH:**
Screwdriver operated cam latch
- FINISH:**
High quality white powder coat primer
- PACKAGING:**
Individually wrapped, 1 door per box

OPTIONS AVAILABLE

- LOCK / LATCH:**
- Key-operated cylinder cam latch
 - Mortise cam latch preparation
 - Cylinder optional
 - Hex head cam latch
- Handle:**
- 4" handle-operated cam latch
 - Fixed 4" handle 4"
 - Handle-operated slam latch
 - 4" Handle and key operated cam latch

- Material:**
- Stainless steel (SS)
 - Galvanneal steel (GS)

For a complete list of options visit www.BestAccessDoors.com

LEED READY: THIS PRODUCT CONTRIBUTES TO LEED® CREDITS




SKU: **BA-AHFRLO**

REMOVABLE AIR HANDLER FLUSH ACCESS DOOR

WITH LARGE OPENING

INSTALLATION

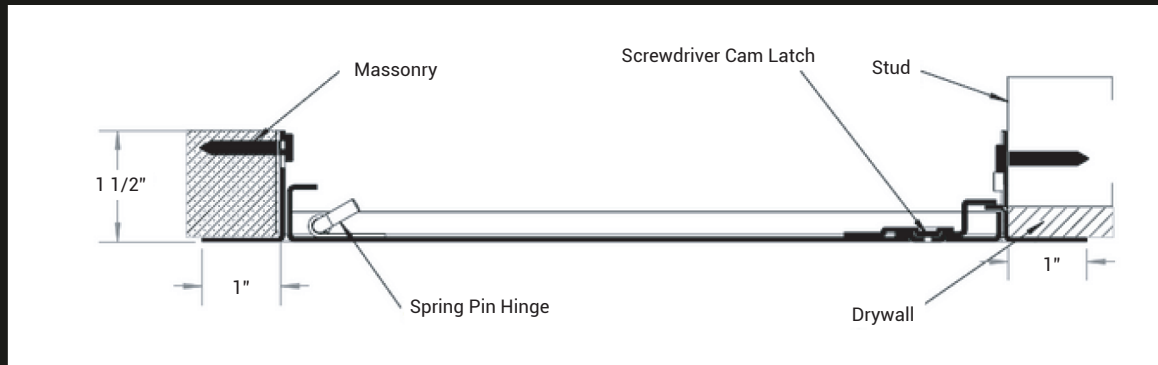

DIMENSIONS AND APPEARANCE


STANDARD SIZES:

DOOR SIZE W x H Inches (mm)	NUMBER OF LOCKS	WEIGHT	
		Lbs	Kg
22" x 30" (558 x 762)	2	18.1	8.2
22" x 36" (558 x 914)	2	21.2	9.6
24" x 30" (609 x 762)	2	19.5	8.9
24" x 36" (609 x 914)	2	22.8	10.3
24" x 48" (609 x 1219)	2	29.4	13.3
30" x 30" (762 x 762)	4	23.6	10.7
30" x 36" (762 x 914)	4	27.8	12.6
36" x 36" (914 x 914)	4	32.1	14.6
36" x 48" (914 x 1219)	4	38.9	17.2
48" x 48" (1219 x 1219)	4	50.0	22.7

Rough wall opening is door size + 1/4" or + 6 mm

The AHU model is recommended for over 2304 sq. inch area or H over 60 inches.

Maximum dimensions: W ≤ 48 in, H ≤ 60 in, and W × H ≤ 2304 in².

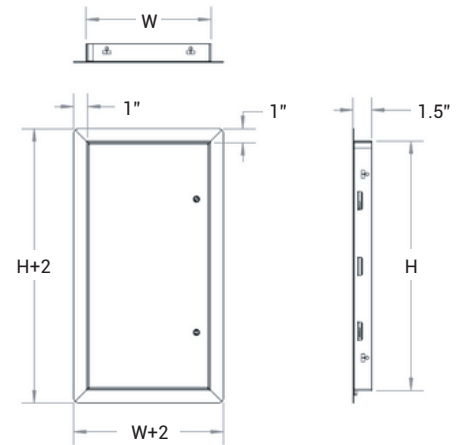

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

TELEPHONE:
1-800-483-0823

FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com

E-MAIL:
info@bestaccessdoors.com