



SUBMITTAL/TECHNICAL DATA SHEET

STANDARD OPTIONS

MATERIAL: Cold-rolled steel, 20-gauge door, and 16-gauge frame

HINGE: Continuous piano hinge, located in the second dimension (height)

LOCK / LATCH: Screwdriver-operated cam latch

FINISH: High quality white powder coat primer

PACKAGING: Individually wrapped, 1 door per box

OPTIONS AVAILABLE

LOCK / LATCH:

- Key-operated cylinder cam latch
- Mortise slam latch (cylinder optional)
- Mortise deadbolt lock (Cylinder optional)

HANDLE:

- 4" handle-operated cam latch
- Fixed 4" handle
- 4" handle-operated slam latch
- 4" handle and key operated cam latch

MATERIAL:

Stainless Steel (SS), Galvanneal steel (GS)

OTHER:

- Neoprene gasket
- Holding cable
- Double-leaf


SKU: **BA-AHU-110**

LARGE OPENING 20 GA ACCESS DOOR

WITH EXPOSED FLANGE




INSTALLATION

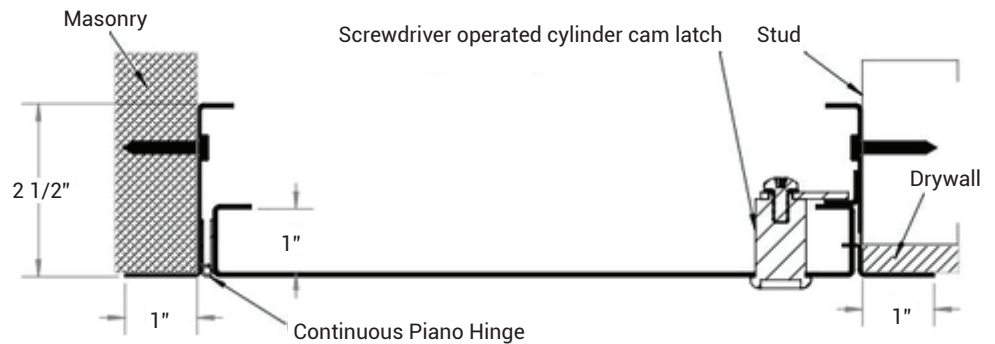

DIMENSIONS AND APPEARANCE

DOOR SIZE W x H INCHES (MM)	NUMBER OF LOCKS	WEIGHT LBS KG
22 x 30 (558 x 762)	1	17.9 8.1
22 x 36 (558 x 914)	2	20.8 9.4
24 x 30 (609 x 762)	1	18.9 8.6
24 x 36 (609 x 914)	2	21.9 9.9
24 x 48 (609 x 1219)	2	27.5 12.6
30 x 30 (762 x 762)	1	21.9 9.9
36 x 36 (914 x 914)	2	28.6 12.9
36 x 48 (914 x 1219)	1	36.5 12.6
36 x 72 (914 x 1828)	2	51.2 23.2
48 x 48 (1219 x 1219)	2	44.7 20.3

Rough wall opening door size + 1/4" or +6mm

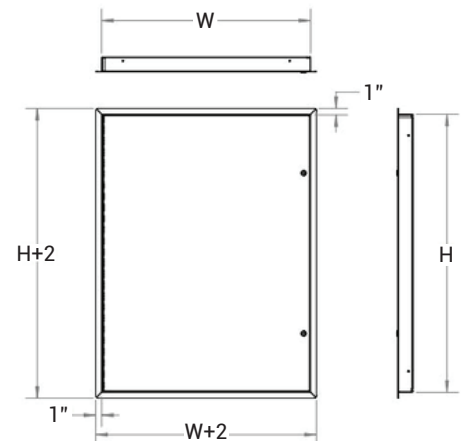

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

LEED READY: THIS PRODUCT
CONTRIBUTES TO LEED® CREDITS



TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com