



Quality Access Doors- FAST!

DESCRIPTIONS

The OSHA compliant, patented compression series safety railing is ideal for existing roof hatches. It's designed to mount on the curb counterflashing with adjustable width and length to accommodate other manufacturer's designs. In addition, the overall height is adjustable to ensure code compliance.

SPECIFICATIONS

MATERIAL: 1- $\frac{5}{8}$ " x .065" (16 gauge) galvanized steel tubing

BRACKET MATERIAL: 2" x 2" x .048" (18 gauge) square galvanized steel tubing

FINISH: Yellow powder coat

HINGES: Steel, adjustable spring hinges

GATE: Self-closing, self-latching with telescoping size adjustment

LATCH: Steel, black powder coat pin hooks around gravity latch catch

HARDWARE: Black plastic tubing caps and zinc-plated steel hardware

SIZES: Based on roof hatch size W x L, where L is hinged side
Minimum: 24" x 24"
Maximum: 48" x 96"

PERFORMANCE: 200LBS with max 3" deflection per OSHA 1910.29, ANSI 1264.4, 50 PLF (pounds per linear foot) per 2024 IBC 1607.9 (ASCE 7)
NOTES: The compression series is designed to mount on the curb counterflashing, but can be mounted underneath. Install the corner posts using one of the three vertical bolt holes so the top rail is 42" above the walking surface, as required by OSHA 1910.29(b)(1) and 2024 IBC 1015.3.

For a complete list of options visit
www.BestAccessDoors.com

SUBMITTAL/TECHNICAL DATA SHEET

SKU: BA-CORHSR

ROOF HATCH SAFETY RAILING




DIMENSIONS AND APPEARANCE


>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<

STANDARD SIZES:

MODEL	W X L	GATE EXIT	WEIGHT
RSHWC-1LY	36" x 30"	Length	88
RSHWC-2WY	30" x 54"	Width	103
RSHWC-3WY	30" x 96"	Width	155
RSHWC-4LY	36" x 36"	Length	91
RSHWC-5LY	48" x 48"	Length	103
RSHWC-6WY	32" x 72"	Width	131
RSHWC-7LY	37" x 30"	Length	89

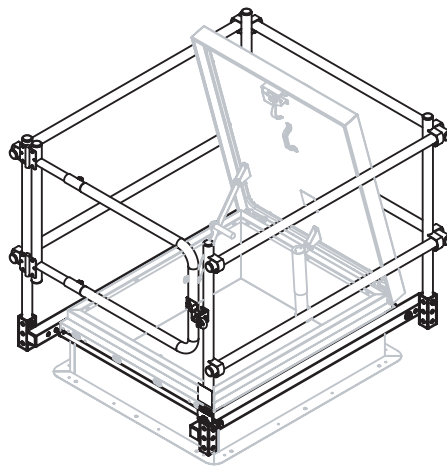

RAILING WITH GATE EXIT ON LENGTH
Typical for Ladder Access Hatches

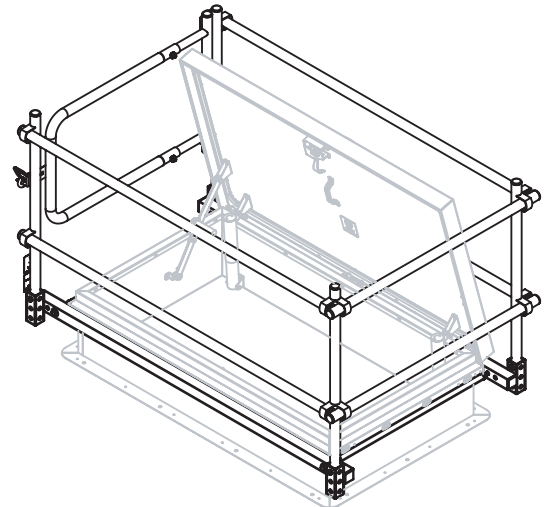

RAILING WITH GATE EXIT ON WIDTH
Typical for Stair Access Hatches

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan  or 



To view Pricing and
Additional Product Info.

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021







228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-CORHSR

ROOF HATCH SAFETY RAILING WITH GATE EXIT ON LENGTH

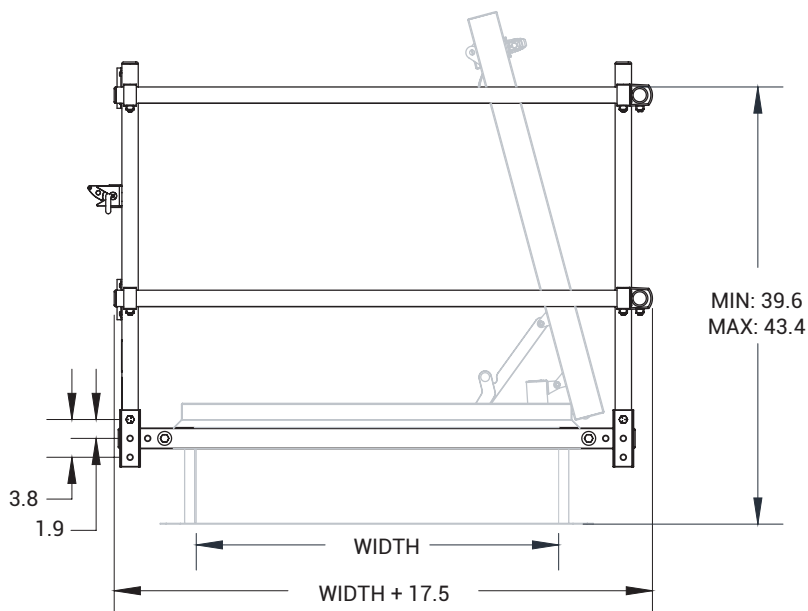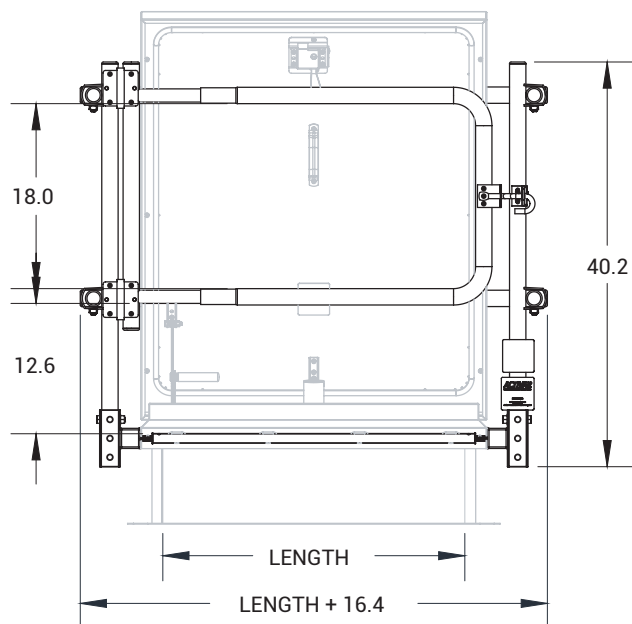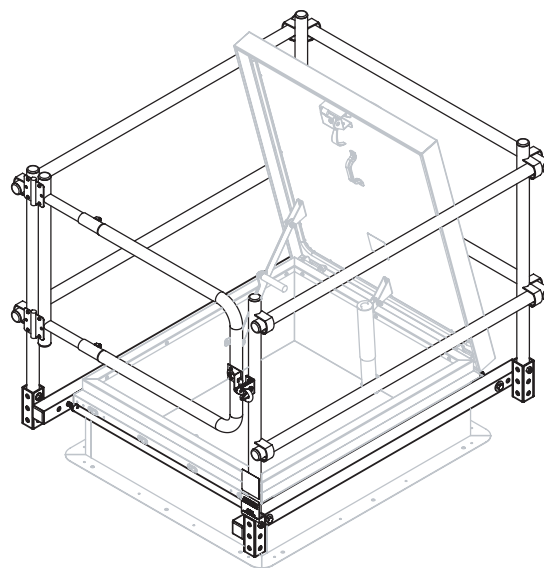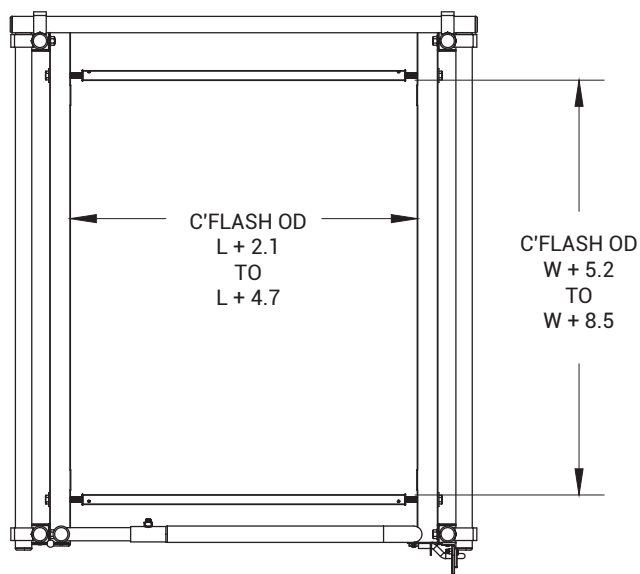



SUBMITTAL

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021

228 PARK AVE. S. #76520
NEW YORK, NY, 10003

WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com

BA-CORHSR

ROOF HATCH SAFETY RAILING
WITH GATE EXIT ON WIDTH

