



# TECHNICAL DATA SHEET

## APPLICATION

Two Rows of Inverted Split "Y" Blades in a 1-13/16" Frame for Flush Mounting in Hollow Metal Frames.

## SPECIFICATIONS

**MATERIAL:** 18 gauge CRS frame and blades. Min size 10" x 10", Max 36" x 36". Multiple sections can be combined for larger transoms.

**CONSTRUCTION:** 2 rows of inverted split "Y" blades at 1" intervals. Blades are attached by interlocking construction to the 1-13/16" deep assembly mounted in a "U" channel frame. Non-vision construction.

**FRAME:** For installation into hollow metal frame by others. Frame inside dimensions of opening = order size.

**FASTENERS:** Mounting bracket furnished with hex head self-drilling tek screw.

**FREE FLOW AREA:** 50% free area.

SKU: **BA-DLIY-B**


## FLUSH-MOUNTED LOUVER FOR TRANSOMS



## DIMENSIONS AND APPEARANCE

>> [CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<](#)

A split louver with two rows of inverted blades that fits doors 1-3/8" and wider. The two sides of the louver are each 3/4" deep and attach to the door with screws on both sides. 50% free area.

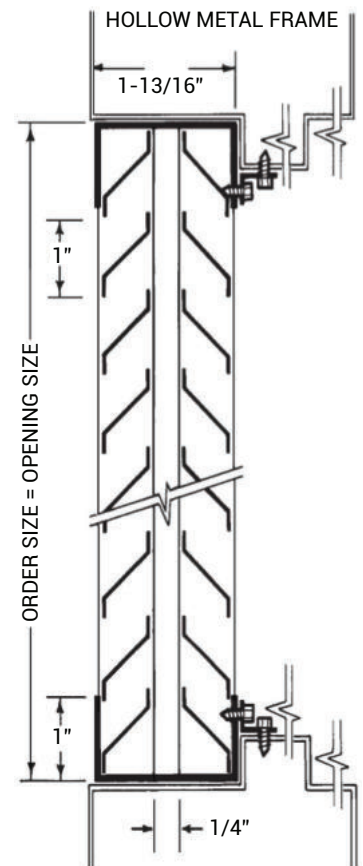

For a complete list of options visit  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)

## PROJECT DATA

Custom Sizes & Options Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan  or 



To view Pricing and  
Additional Product Info.



TELEPHONE:  
1-800-483-0823  
FAX:  
1-888-828-6021



228 PARK AVE. S. #76520  
NEW YORK, NY, 10003



WEBSITE:  
[www.BestAccessDoors.com](http://www.BestAccessDoors.com)  
E-MAIL:  
[info@bestaccessdoors.com](mailto:info@bestaccessdoors.com)