




FLUSH ACCESS DOOR WITH CONCEALED PUSH-LATCH AND DRYWALL FLANGE - FOR ALL SURFACE TYPES

BA-EDG

EDG-GYP


INSTALLATION

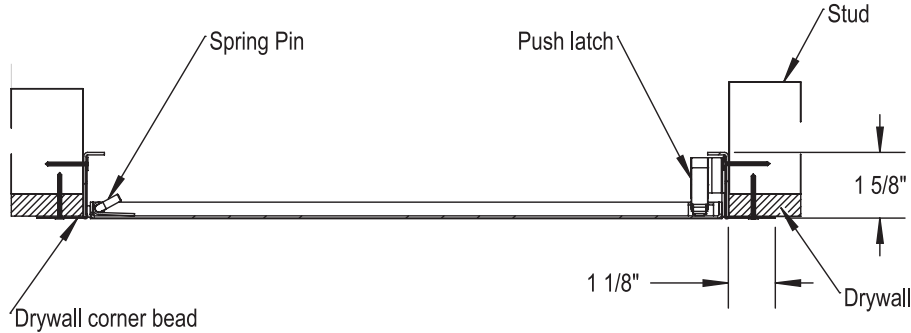

DIMENSION AND APPEARANCE

DOOR SIZE - W x H INCHES (MM)	WEIGHT	
	LBS	KG
6" X 6" (152 x 152)	2	1
8" X 8" (203 x 203)	3	1.4
8" X 12" (203 x 304)	4	1.8
10" X 10" (254 x 254)	4	1.8
* 12" X 12" (304 x 304)	6	2.7
12" X 16" (304 x 406)	7	3.2
12" X 18" (304 x 457)	8	3.6
12" X 24" (304 x 609)	9	4.1
14" X 14" (355 x 355)	7	3.2
16" X 16" (406 x 406)	9	4.1
18" X 18" (457 x 457)	10	4.5
18" X 24" (457 x 609)	13	5.9
20" X 20" (508 x 508)	13	5.9
22" X 22" (558 x 558)	15	6.8
24" X 24" (609 x 609)	17	7.7

* Doors >12" X 12" have 2 push latches.

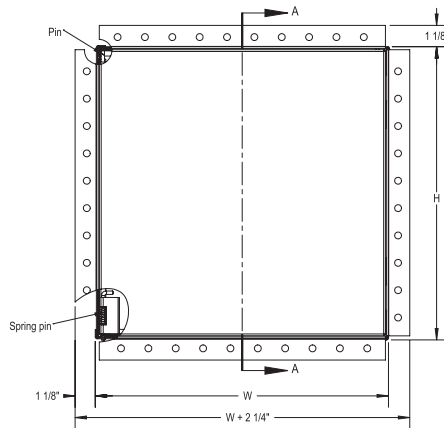

Rough wall opening = door size + 1/4"

LEED ready: This product contributes to LEED® credits.



DESCRIPTION AND MATERIAL SPECIFICATION

Material: 16 gauge cold rolled steel. Frame with corner bead flange.

Hinge: Concealed spring hinge.

Lock / latch: Concealed push latch.

Finish: High quality white powder coat finish.

Removable door: Safety cables - For doors > 12" X 12"

Packaging: Individually wrapped. 1 per box.

POPULAR OPTIONS For complete list of options go to: www.BestAccessDoors.com

Material: Stainless steel, galvanized steel

Lock / Latch: Screwdriver cam latch, key operated cylinder cam latch, hex head cam latch, pinned hex head cam latch, handle operated cam latch, mortise preparation for cylinder (cylinder optional), ring/tool key operated slam latch.



PROJECT DATA

PRoJECT NaME:	QTY	W	H	oPTIoNS
aRCHITECT:				
DEaLER:				
CoNTRaCT oR:				
LoCa TIoN:	SPECIaL INSTRuCTIoNS:			
DaTE:				
TaggIng INSTRuCTIoNS:	SubMITT aL aPPRoV aL: (signature or stamp)			

ADDRESS: 427 N Tatnail St, #76520 Wilmington, DE 19802-2230

Tel.: 1-800-483-0823

Fax: 1-888-828-6021

www.BestAccessDoors.com

info@bestaccessdoors.com

Your odd sizes:
Made in 5 days