



Quality Access Doors- **FAST!**

SUBMITTAL/TECHNICAL DATA SHEET

DESCRIPTION

The access panel is made of aluminium profiles with a cement-bonded construction panel and a round cylinder lever lock with key.

The inner frame has a thickness of 15 mm, while the cement board has a thickness of 12.5 mm and is recessed to allow for flush finishing.

The outer frame has a thickness of 60 mm and is designed for installation on block or brick walls, thanks to the anchoring brackets or the option of fastening with wall plugs.

From the measure 300x300 the access panel is supplied with two or more safety chains with carabiners, which must be reattached after each opening to ensure safety.

A 3 mm gap is left between the frame and the door, fitted with an airtight and dustproof joint, as well as a special pressure gasket for protection against atmospheric agents.

ADVANTAGE

- Economical solution
- Fast delivery
- Quick and easy installation
- Solid aluminium frame
- Technically proven solution and innovative design
- Quick installation on facades

SKU: **BA-IVHWD**

EXTERIOR ACCESS PANEL

FOR OUTDOOR



DIMENSIONS AND APPEARANCE

>> CLICK TO VIEW ADDITIONAL DETAILS AND PRICING <<


STANDARD SIZES:

MPWD System	Dimensions in mm		
	A	B	C
MPWD200200	200	200	78
MPWD300300	300	300	78
MPWD400400	400	400	78
MPWD500500	500	500	78
MPWD600600	600	600	78

All standard sizes are available from stock at short notice.

A and B = inside frame measurement
C = 78 mm

Light hole: door measure - 56 mm
Wall hole: door measure + 5 mm

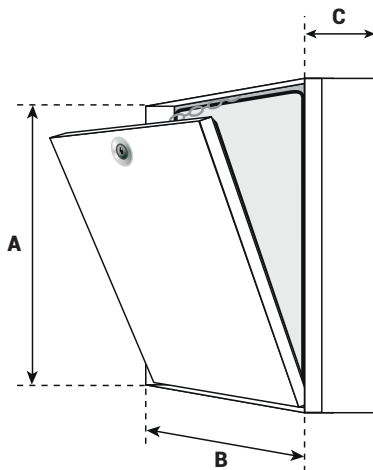

The access panel is 'driving rain-proof' according to EN 1027

- Class 2A according to EN 12208 (in conjunction with round cylinder lock)
- Class 5A according to EN 12208 (without consideration of the lock variants)

according to Test Report FEA220114_00_00TR (GiB GmbH Arnstorf)

Special Designs:

Special dimensions in any desired size can be manufactured on request.

Locks:

The access panel can be designed with the following lock types:

- Z** = Round cylinder lever lock with key (standard)
- PZ** = Profile cylinder lock with metal rosette



For a complete list of options visit
www.BestAccessDoors.com

PROJECT DATA

Custom Sizes Available - Fast!

PROJECT NAME :	QTY	W	H	OPTIONS
ARCHITECT :				
DEALER :				
CONTRACTOR :				
LOCATION :	SPECIAL INSTRUCTIONS :			
DATE :				
TAGGING INSTRUCTIONS :	SUBMITTAL APPROVAL : (signature or stamp)			

Scan or Click



To view Pricing and Additional Product Info.

TELEPHONE:
1-800-483-0823
FAX:
1-888-828-6021



228 PARK AVE. S. #76520
NEW YORK, NY, 10003



WEBSITE:
www.BestAccessDoors.com
E-MAIL:
info@bestaccessdoors.com